CHAPTER

53

Fuselage

CHAPTER 53
FUSELAGE

Subject/Page	Date	COC	Subject/Page	Date	COC
53-EFFECTIVE PAGES					
1	Sep 15/2023				
2	BLANK				
53-CONTENTS					
1	Sep 15/2021				
2	BLANK				
53-00-00					
1	Sep 15/2021				
2	Sep 15/2021				
3	Sep 15/2021				
4	Sep 15/2021				
5	Sep 15/2021				
6	Sep 15/2021				
7	Sep 15/2021				
8	Sep 15/2021				
9	Sep 15/2021				
10	Sep 15/2021				
11	Sep 15/2021				
12	BLANK				

A = Added, R = Revised, D = Deleted, O = Overflow, C = Customer Originated Change

53-EFFECTIVE PAGES

CHAPTER 53
FUSELAGE

53-CONTENTS

THIS PAGE IS INTENTIONALLY LEFT BLANK

FUSELAGE - INTRODUCTION

General

The fuselage is a semi-monocoque structure. Most of material in the fuselage is aluminum.

These auxiliary structures attach to the fuselage:

- Nose radome
- Wing-to-body fairing

SIA 015-999

- Broadband Radome

SIA ALL

- Tailcone.

These dimensions give locations on the fuselage. The scale for each dimension is inches.

- Station line
- Body buttock line
- Water line.

The body station line (STA) is a horizontal dimension. It starts at station line zero. You measure the body station line from a vertical reference plane that is forward of the airplane.

The body buttock line (BL) is a lateral dimension. You measure the buttock line to the left or right of the airplane center line.

The water line (WL) is a height dimension. You measure the water line from a horizontal reference plane below the airplane.

Abbreviations and Acronyms

- BL - buttock line
- LBL - left buttock line
- MPD - maintenance planning data document
- RBL - right buttock line
- sta - station
- WL - water line

FUSELAGE - INTRODUCTION

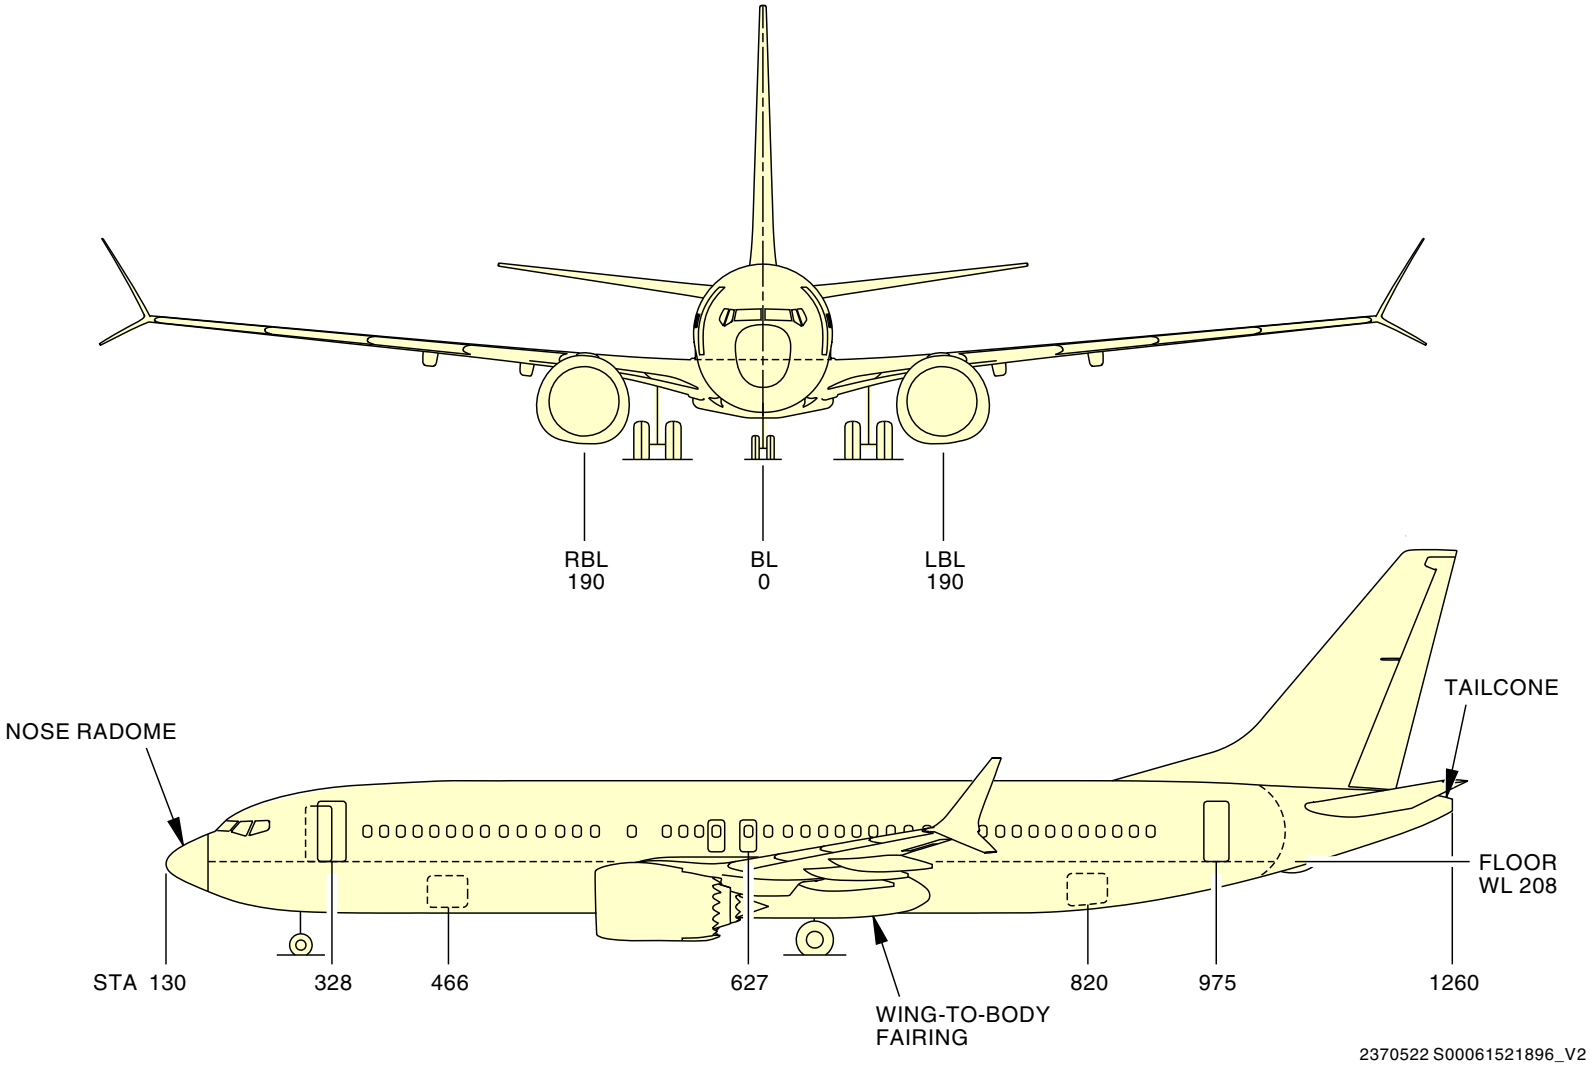

FUSELAGE - INTRODUCTION

FUSELAGE - INTRODUCTION

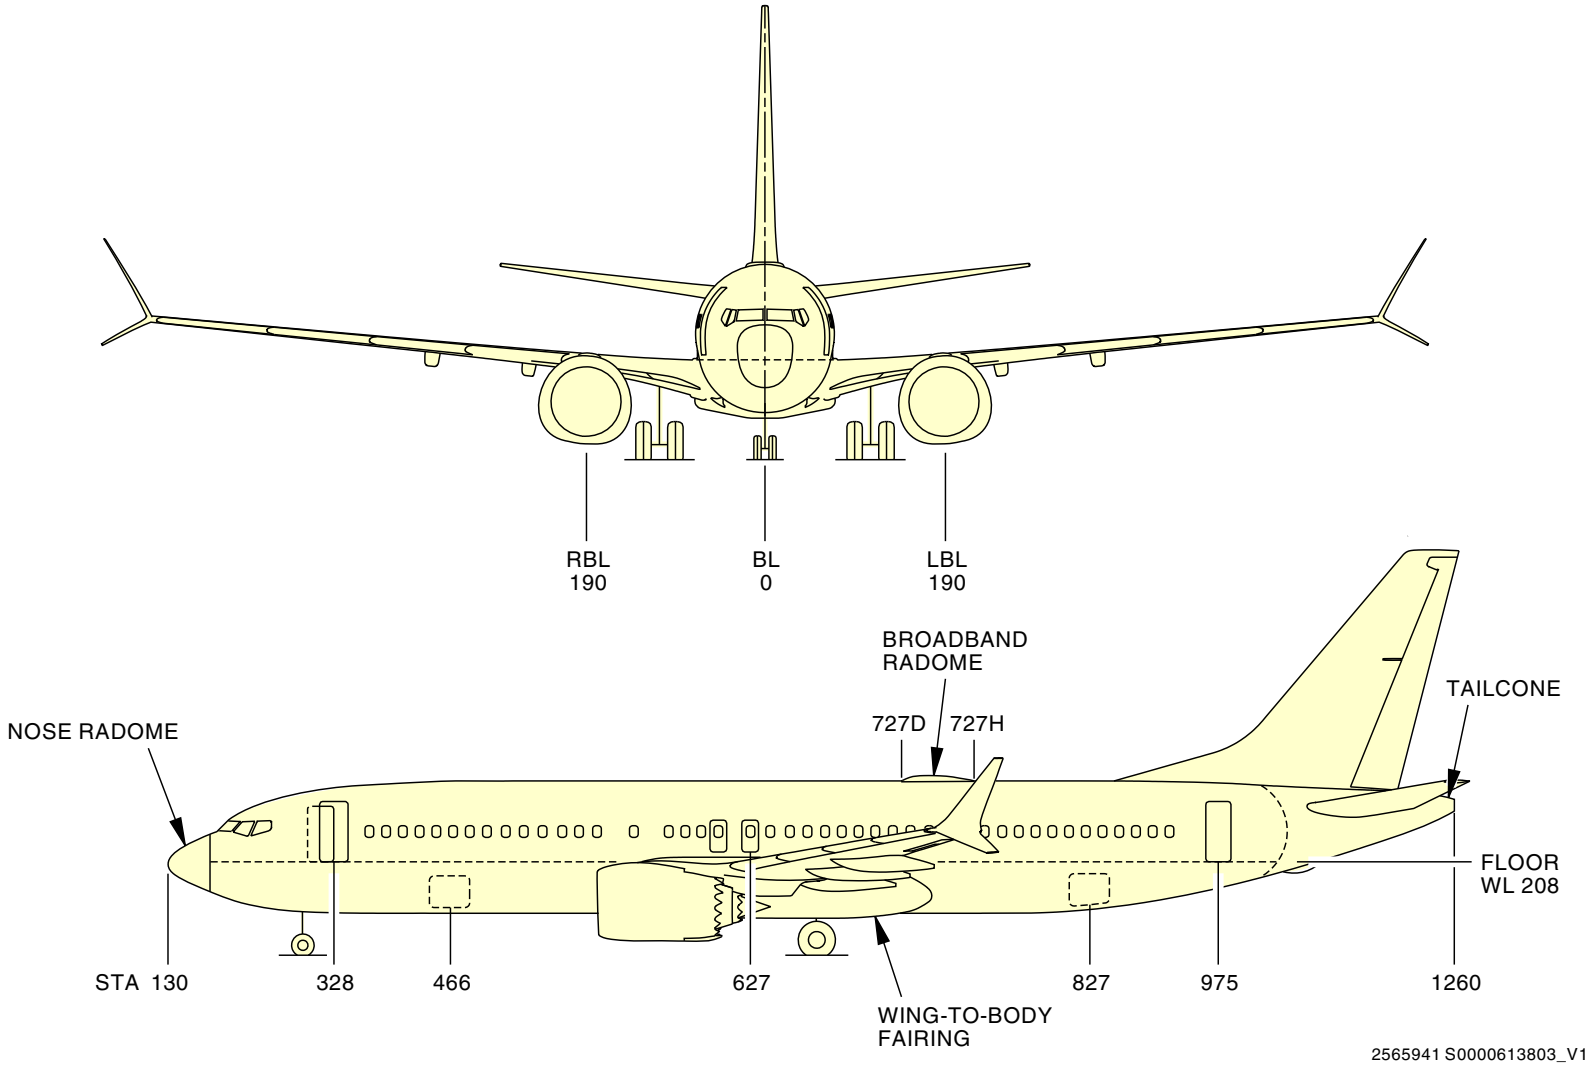

FUSELAGE - INTRODUCTION

THIS PAGE IS INTENTIONALLY LEFT BLANK

FUSELAGE - NOSE RADOME

General

The nose radome is an aerodynamic fairing on the front of the fuselage. Most of the material in the radome is fiberglass.

The radome area has navigation and weather radar antennas. Lightning diverter strips prevent damage to these antennas and the equipment they connect to. The lightning diverter strips decrease lightning energy and transmit it to the airframe.

See the navigation chapter for more information on the navigation and weather radar antennas. (CHAPTER 34)

FUSELAGE - NOSE RADOME

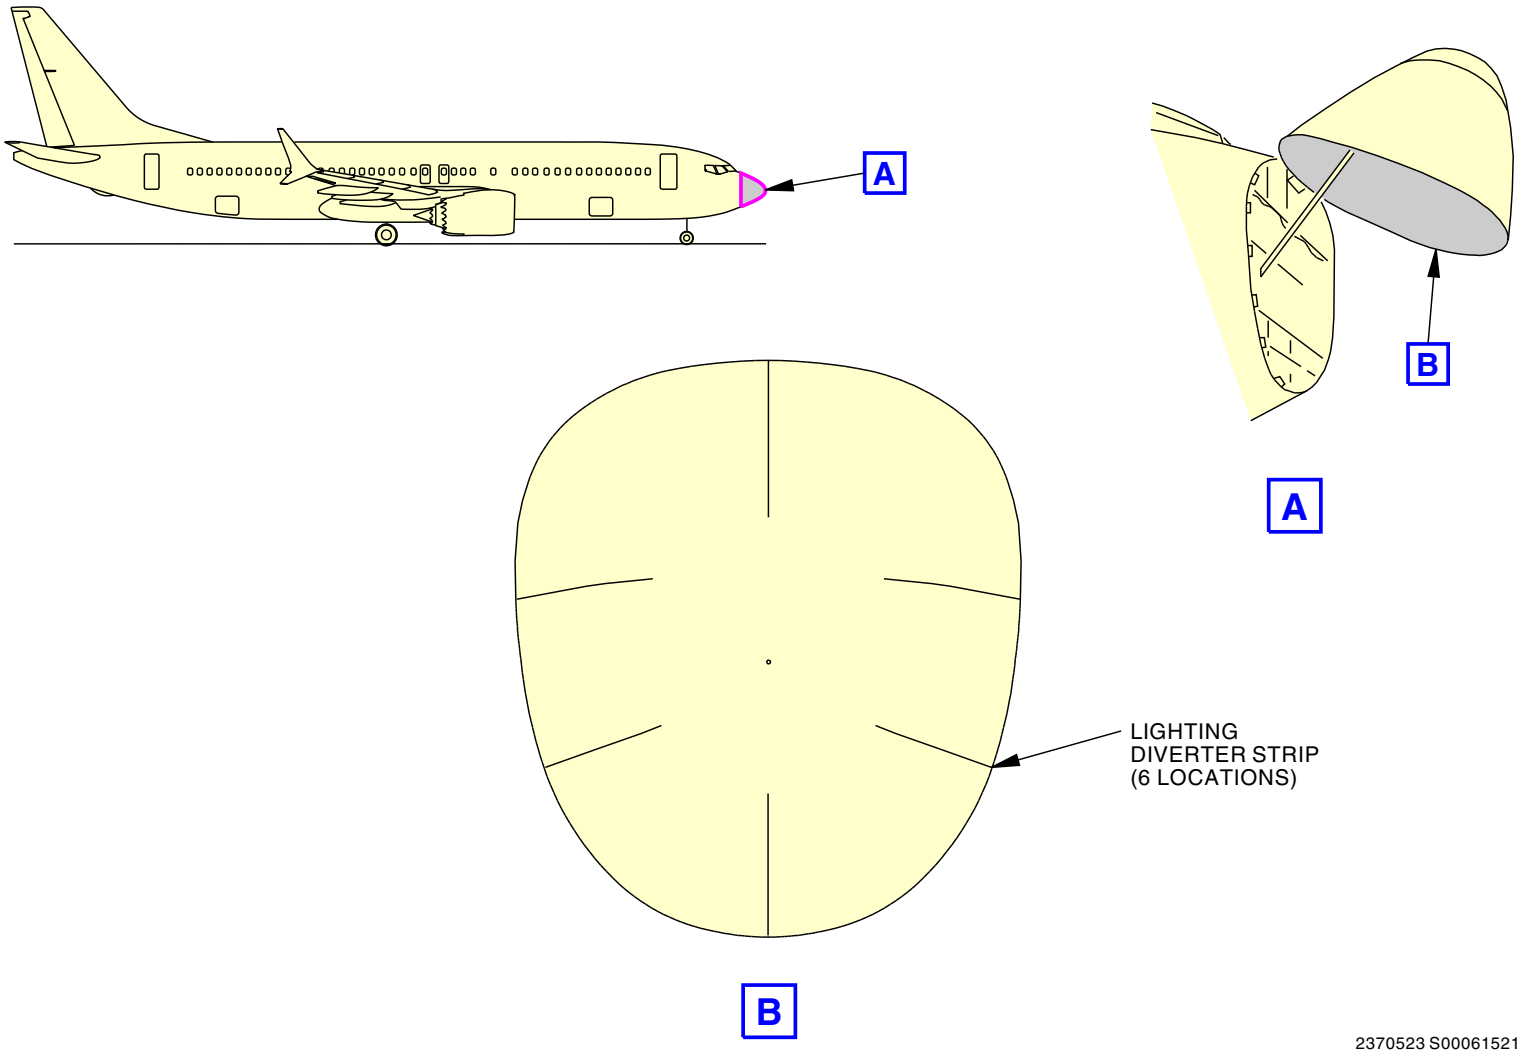

2370523 S00061521898_V1

FUSELAGE - NOSE RADOME

FUSELAGE - BROADBAND RADOME

General

The Broadband Radome provides protection for the receive/transmit antenna, as well as aerodynamic smoothing for what would be antenna protrusion into the airstream. Atmospheric pressure inside of the radome is at ambient pressure.

The broadband radome attaches to the CbB Next Generation Antenna (NGA) Adapter Plate. The adapter plate transfers radome loads into the body through nine attachment points.

Because of the length of the radome adapter plate, the plate is isolated from fuselage deflections by using pivot links at most of these attachment points. The use of pivot links prevents excessive deflection-induced fore-aft or inboard-outboard loads.

The links are fastened to attachment fittings that are installed on the external side of the fuselage skin. The attachment fittings are fastened to the fuselage skin and are backed-up internally by a combination of frame shear ties and intercostals.

Component Description

The broadband radome is 92.6 inches long, 42.3 inches wide and 11.0 inches high.

The broadband radome is made from a quasi-isotropic quartz-epoxy laminate construction. It is somewhat teardrop in shape (in plan view) and performs an aerodynamic smoothing function around the receive/transmit antenna.

The frontal surface shape is similar in configuration to that of the Wedgetail® radome, thereby enabling the radome to bounce a bird if impacted in flight.

The broadband radome is attached to the adapter plate all along the lower edge band utilizing 5/16- inch diameter, countersunk fasteners.

Near the aft end of the radome is a pressure relief panel approximately 5.5 inches by 15 inches in size. The panel door is designed to fail benignly when the internal pressure between the radome and the fuselage reaches between 1.0 to 1.3 psi.

FUSELAGE - BROADBAND RADOME

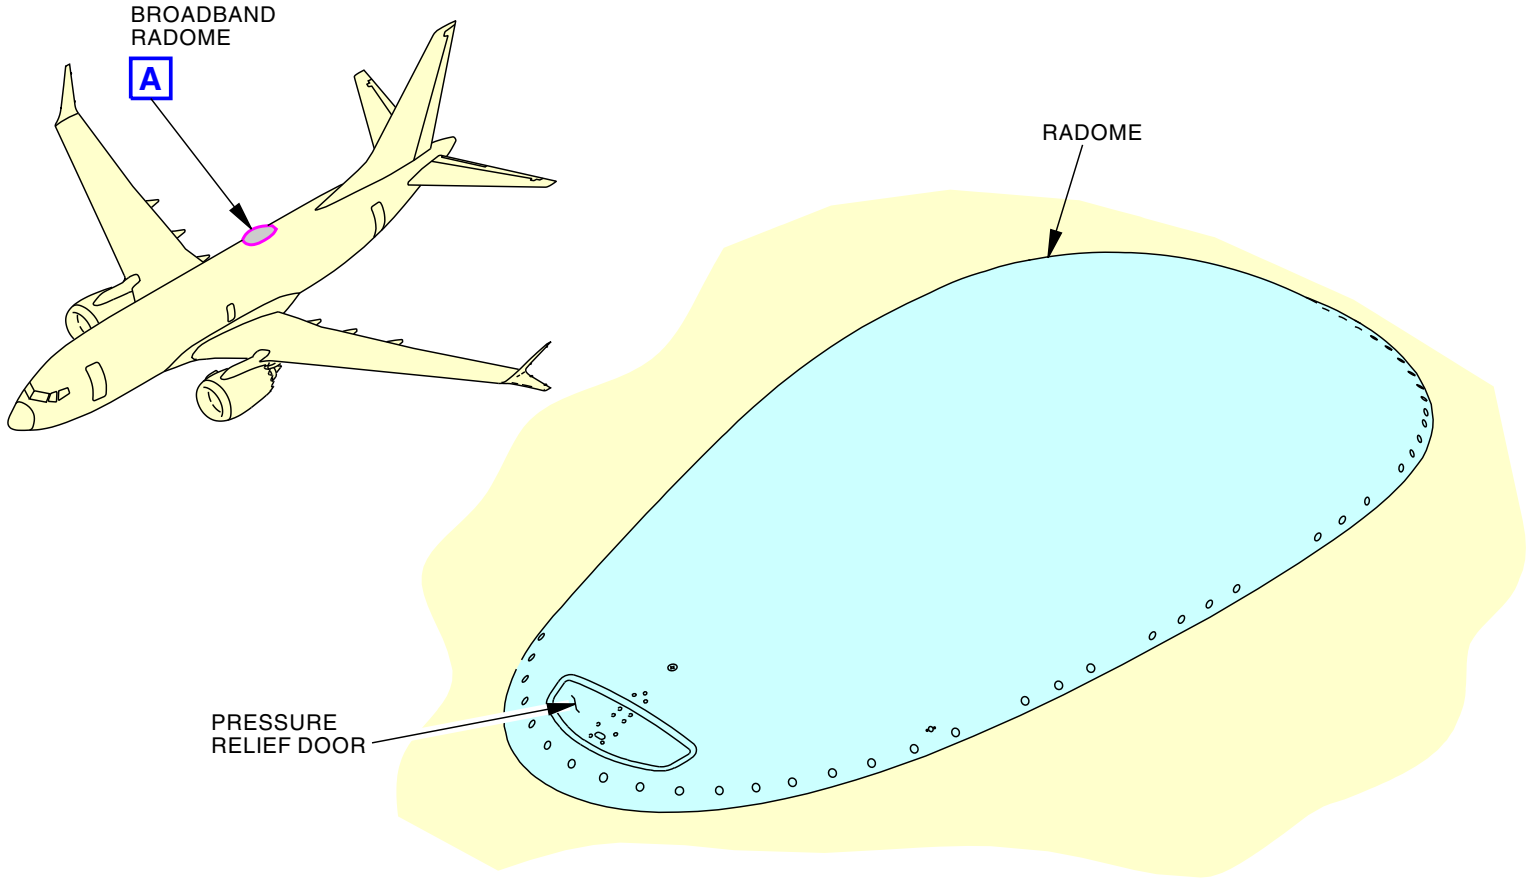

2537787 S0000602504_V1

BROADBAND RADOME

FUSELAGE - TAILCONE

General

The tailcone is an aerodynamic fairing on the aft of the fuselage. Most of the material in the tailcone is fiberglass. The exhaust fairing on the tailcone is titanium.

The tailcone area has the APU exhaust duct and the mechanisms for the elevators. The tailcone has access panels on the left and right side. The right side access panel has a pressure relief door.

The tailcone has two anti-collision lights. Each side of the tailcone has one anti-collision light.

The tailcone is located at STA 1156 to STA 1260.

FUSELAGE - TAILCONE

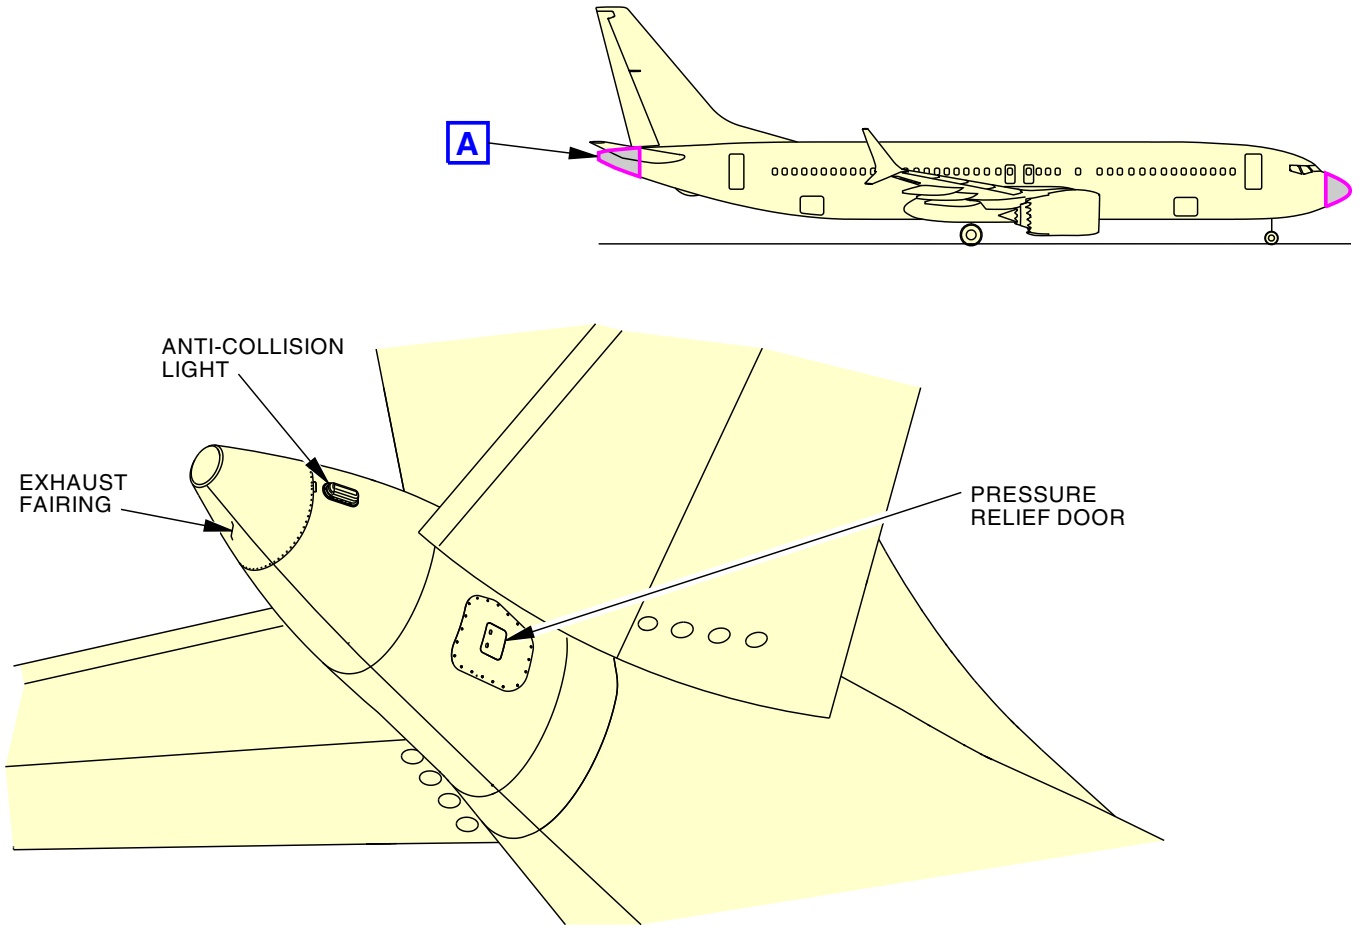

2529513 S0000596884_V1

FUSELAGE - TAILCONE