

CHAPTER

28

Fuel

CHAPTER 28
FUEL

Subject/Page	Date	COC	Subject/Page	Date	COC
28-EFFECTIVE PAGES			28-10-00 (cont.)		
1 thru 4	Oct 15/2023		11	Oct 15/2021	
28-CONTENTS			12	BLANK	
1	Oct 15/2021		28-21-00		
2	Oct 15/2021		1	Oct 15/2021	
3	Oct 15/2021		2	Oct 15/2021	
4	Oct 15/2021		3	Oct 15/2021	
28-00-00			4	Oct 15/2021	
1	Oct 15/2021		5	Oct 15/2021	
2	Oct 15/2021		6	Oct 15/2021	
3	Oct 15/2021		7	Oct 15/2021	
4	Oct 15/2021		8	Oct 15/2021	
5	Oct 15/2021		9	Oct 15/2021	
6	BLANK		10	Oct 15/2021	
28-10-00			11	Oct 15/2021	
1	Oct 15/2021		12	Oct 15/2021	
2	Oct 15/2021		13	Oct 15/2021	
3	Oct 15/2021		14	Oct 15/2021	
4	Oct 15/2021		15	Oct 15/2021	
5	Oct 15/2021		16	Oct 15/2021	
6	Oct 15/2021		17	Oct 15/2021	
7	Oct 15/2021		18	BLANK	
8	Oct 15/2021		28-22-00		
9	Oct 15/2021		1	Oct 15/2021	
10	Oct 15/2021		2	Oct 15/2021	

A = Added, R = Revised, D = Deleted, O = Overflow, C = Customer Originated Change

28-EFFECTIVE PAGES

CHAPTER 28
FUEL

Subject/Page	Date	COC	Subject/Page	Date	COC
28-22-00 (cont.)			28-22-00 (cont.)		
R 3	Oct 15/2023		27	Oct 15/2021	
4	Feb 15/2022		28	Oct 15/2021	
R 5	Oct 15/2023		29	Oct 15/2021	
6	Feb 15/2022		30	Oct 15/2021	
7	Feb 15/2022		31	Oct 15/2021	
8	Feb 15/2023		32	Oct 15/2021	
R 9	Oct 15/2023		33	Oct 15/2021	
10	Feb 15/2022		34	Oct 15/2021	
11	Feb 15/2022		35	Oct 15/2021	
12	Oct 15/2021		36	Oct 15/2021	
13	Oct 15/2021		37	Oct 15/2021	
14	Oct 15/2021		38	BLANK	
15	Oct 15/2021		28-25-00		
16	Oct 15/2021		1	Oct 15/2021	
17	Oct 15/2021		2	Oct 15/2021	
18	Oct 15/2021		3	Oct 15/2021	
19	Oct 15/2021		4	Oct 15/2021	
20	Oct 15/2021		5	Oct 15/2021	
21	Oct 15/2021		6	Oct 15/2021	
22	Oct 15/2021		7	Oct 15/2021	
23	Oct 15/2021		8	Oct 15/2021	
24	Oct 15/2021		9	Oct 15/2021	
25	Oct 15/2021		10	Oct 15/2021	
26	Oct 15/2021				

A = Added, R = Revised, D = Deleted, O = Overflow, C = Customer Originated Change

28-EFFECTIVE PAGES

CHAPTER 28
FUEL

Subject/Page	Date	COC	Subject/Page	Date	COC
28-25-00 (cont.)			28-41-00 (cont.)		
11	Oct 15/2021		8	Oct 15/2021	
12	Oct 15/2021		9	Oct 15/2021	
13	Oct 15/2021		10	Oct 15/2021	
14	BLANK		11	Oct 15/2021	
28-26-00			12	Jun 15/2023	
1	Oct 15/2021		R 13	Oct 15/2023	
2	Oct 15/2021		14	Jun 15/2023	
3	Oct 15/2021		15	Feb 15/2022	
4	Oct 15/2021		16	Oct 15/2021	
5	Oct 15/2021		17	Oct 15/2021	
6	Oct 15/2021		R 18	Oct 15/2023	
7	Oct 15/2021		19	Oct 15/2021	
8	Oct 15/2021		20	Oct 15/2021	
9	Oct 15/2021		21	Oct 15/2021	
10	Oct 15/2021		22	Oct 15/2021	
11	Oct 15/2021		23	Oct 15/2021	
12	BLANK		24	Oct 15/2021	
28-41-00			25	Oct 15/2021	
1	Oct 15/2021		26	Oct 15/2021	
2	Oct 15/2021		27	Oct 15/2021	
3	Oct 15/2021		R 28	Oct 15/2023	
4	Oct 15/2021		29	Oct 15/2021	
R 5	Oct 15/2023		30	Feb 15/2022	
6	Feb 15/2022				
7	Feb 15/2022				

A = Added, R = Revised, D = Deleted, O = Overflow, C = Customer Originated Change

28-EFFECTIVE PAGES

CHAPTER 28
FUEL

Subject/Page	Date	COC	Subject/Page	Date	COC
28-41-00 (cont.)					
R 31	Oct 15/2023				
32	Feb 15/2022				
33	Feb 15/2022				
34	Oct 15/2021				
35	Oct 15/2021				
36	Oct 15/2021				
37	Oct 15/2021				
38	BLANK				
28-43-00					
1	Oct 15/2021				
2	Oct 15/2021				
3	Oct 15/2021				
4	BLANK				
28-44-00					
1	Oct 15/2021				
2	Oct 15/2021				
3	Oct 15/2021				
4	BLANK				

A = Added, R = Revised, D = Deleted, O = Overflow, C = Customer Originated Change

28-EFFECTIVE PAGES

**CHAPTER 28**
FUEL

CH-SC-SU	SUBJECT	PAGE	EFFECT
28-00-00	FUEL SYSTEM - INTRODUCTION	2	SIA ALL
28-00-00	FUEL SYSTEM - GENERAL DESCRIPTION	4	SIA ALL
28-10-00	FUEL STORAGE - GENERAL DESCRIPTION	2	SIA ALL
28-10-00	FUEL STORAGE - FUEL TANK ACCESS	4	SIA ALL
28-10-00	FUEL STORAGE - SUMP DRAIN VALVES	6	SIA ALL
28-10-00	FUEL STORAGE - FUEL VENT SYSTEM	8	SIA ALL
28-10-00	FUEL STORAGE - CENTER TANK SCAVENGE SYSTEM	10	SIA ALL
28-21-00	PRESSURE FUELING SYSTEM - INTRODUCTION	2	SIA ALL
28-21-00	PRESSURE FUELING SYSTEM - GENERAL DESCRIPTION	4	SIA ALL
28-21-00	PRESSURE FUELING SYSTEM - COMPONENT LOCATION	6	SIA ALL
28-21-00	PRESSURE FUELING SYSTEM - P15 FUELING PANEL	8	SIA ALL
28-21-00	PRESSURE FUELING SYSTEM - FUELING MANIFOLD	10	SIA ALL
28-21-00	PRESSURE FUELING SYSTEM - FUELING FLOAT SWITCHES	12	SIA ALL
28-21-00	PRESSURE FUELING SYSTEM - FUNCTIONAL DESCRIPTION - POWER AND CONTROL	14	SIA ALL
28-21-00	PRESSURE FUELING SYSTEM - OPERATION	16	SIA ALL
28-22-00	ENGINE FUEL FEED - INTRODUCTION	2	SIA ALL
28-22-00	ENGINE FUEL FEED - GENERAL DESCRIPTION	8	SIA ALL
28-22-00	ENGINE FUEL FEED - COMPONENT LOCATION	12	SIA ALL
28-22-00	ENGINE FUEL FEED - CENTER TANK BOOST PUMP	14	SIA ALL

28-CONTENTS

**CHAPTER 28**
FUEL

CH-SC-SU	SUBJECT	PAGE	EFFECT
28-22-00	ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - CENTER TANK BOOST PUMP	16	SIA ALL
28-22-00	ENGINE FUEL FEED - MAIN TANK 1 FORWARD AND AFT BOOST PUMPS	18	SIA ALL
28-22-00	ENGINE FUEL FEED - MAIN TANK NO. 2 FORWARD AND AFT BOOST PUMPS	20	SIA ALL
28-22-00	ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - FORWARD AND AFT BOOST PUMP	22	SIA ALL
28-22-00	ENGINE FUEL FEED - FUEL CROSSFEED VALVE	24	SIA ALL
28-22-00	ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - FUEL CROSSFEED VALVE	26	SIA ALL
28-22-00	ENGINE FUEL FEED - ENGINE FUEL SPAR VALVE	28	SIA ALL
28-22-00	ENGINE FUEL FEED - ENGINE FUEL SPAR VALVE OPERATION	30	SIA ALL
28-22-00	ENGINE FUEL FEED - FUEL SHUTOFF VALVE BATTERY	32	SIA ALL
28-22-00	ENGINE FUEL FEED - WATER SCAVENGE EJECTOR PUMP	34	SIA ALL
28-22-00	ENGINE FUEL FEED - OPERATION	36	SIA ALL
28-25-00	APU FUEL FEED - INTRODUCTION	2	SIA ALL
28-25-00	APU FUEL FEED - GENERAL DESCRIPTION	4	SIA ALL
28-25-00	APU FUEL FEED - COMPONENT LOCATION	6	SIA ALL
28-25-00	APU FUEL FEED - APU FUEL SUPPLY LINE, SHROUD, AND DRAIN LINE	8	SIA ALL
28-25-00	APU FUEL FEED - APU FUEL SHUTOFF VALVE	10	SIA ALL
28-25-00	APU FUEL FEED - APU FUEL SHUTOFF VALVE OPERATION	12	SIA ALL
28-26-00	DEFUEL - INTRODUCTION	2	SIA ALL

28-CONTENTS

CHAPTER 28
FUEL

<u>CH-SC-SU</u>	<u>SUBJECT</u>	<u>PAGE</u>	<u>EFFECT</u>
28-26-00	DEFUEL - GENERAL DESCRIPTION	4	SIA ALL
28-26-00	DEFUEL - COMPONENT LOCATION	6	SIA ALL
28-26-00	DEFUEL - DEFUEL VALVE	8	SIA ALL
28-26-00	DEFUEL - OPERATION	10	SIA ALL
28-41-00	FUEL INDICATING - INTRODUCTION	2	SIA ALL
28-41-00	FUEL INDICATING - GENERAL DESCRIPTION	4	SIA ALL
28-41-00	FUEL INDICATING - TANK UNITS AND COMPENSATORS	8	SIA ALL
28-41-00	FUEL INDICATING - WIRE HARNESSSES	10	SIA ALL
28-41-00	FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT	12	SIA ALL
28-41-00	FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT - POWER	16	SIA ALL
28-41-00	FUEL INDICATING - PROCESSOR - FUNCTIONAL DESCRIPTION	18	SIA ALL
28-41-00	FUEL INDICATING - FUEL QUANTITY INDICATIONS	20	SIA ALL
28-41-00	FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST MAIN MENU PAGES	22	SIA ALL
28-41-00	FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST CURRENT STATUS PAGE	24	SIA ALL
28-41-00	FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST INFLIGHT FAULT PAGES	26	SIA ALL
28-41-00	FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST GROUND TEST PAGES	28	SIA ALL
28-41-00	FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST IDENT/CONFIG PAGES	30	SIA ALL

28-CONTENTS



CHAPTER 28
FUEL

<u>CH-SC-SU</u>	<u>SUBJECT</u>	<u>PAGE</u>	<u>EFFECT</u>
28-41-00	FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST INPUT MONITORING PAGES	34	SIA ALL
28-41-00	FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST ERASE FAULT HISTORY PAGES	36	SIA ALL
28-43-00	FUEL TEMPERATURE INDICATING SYSTEM	2	SIA ALL
28-44-00	FUEL MEASURING STICK - INTRODUCTION	2	SIA ALL

28-CONTENTS



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-00-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL SYSTEM - INTRODUCTION

Purpose

The fuel system has these primary purposes:

- Stores fuel for use by engines and APU
- Supplies fuel to engines
- Supplies fuel to APU.

General



The fuel system has these subsystems:

- Fuel storage
- Pressure fueling
- Engine fuel feed
- APU fuel feed
- Defuel
- Fuel quantity indicating system
- Fuel temperature indication.

Abbreviations and Acronyms

- APU - auxiliary power unit
- CDS - common display system
- FQPU - fuel quantity processor unit
- FQIS - fuel quantity indicating system
- kgs - kilograms
- lbs - pounds

FUEL SYSTEM - INTRODUCTION

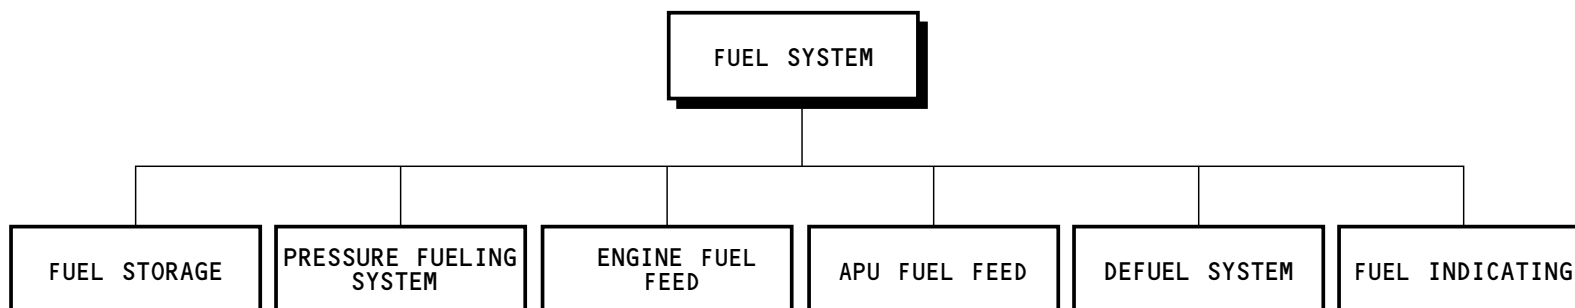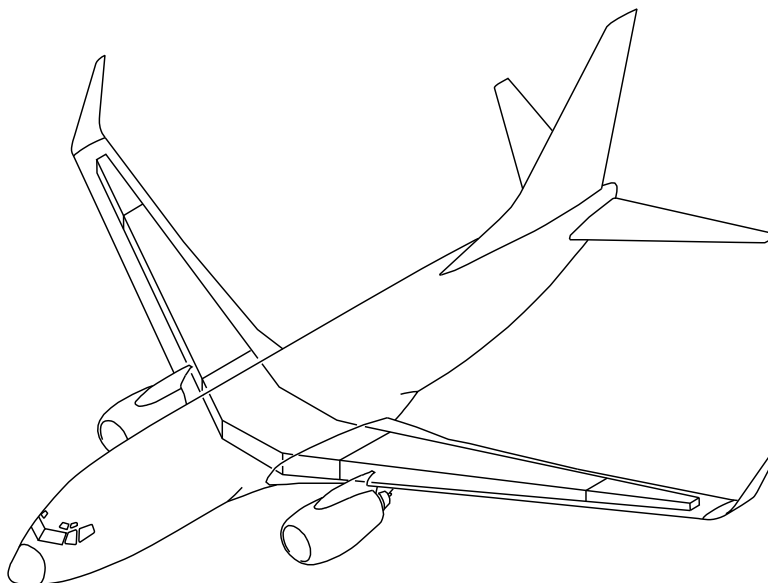

M84537 S0004625968_V1

FUEL SYSTEM - INTRODUCTION

28-00-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL SYSTEM - GENERAL DESCRIPTION

General

The fuel tanks store fuel for use by the engines and the APU. The pressure fueling system lets you add fuel to each tank. The fueling station is on the right wing. You also do defueling and fuel transfer at the fueling station.

Each main tank has two boost pumps (fuel pumps). The center tank also has two boost pumps. The center tank boost pumps supply fuel at a higher pressure than the pumps in the main tanks. Because of this, the fuel in the center tank is used before the fuel in the main tanks.

A nitrogen generation system removes oxygen in the center tank air to a level which does not support combustion.

Control of the engine and APU fuel feed system is on the P5 panel. Fuel quantity of each tank shows in the flight compartment and at the fueling station.

BITE is available to maintenance personnel through the control display unit (CDU).

Fuel Storage

These tanks store fuel:

- Main tank 1
- Main tank 2
- Center tank.

The surge tanks collect fuel overflow only.

The main tanks are in the wings. Main tank 1 is in the left wing. Main tank 2 is in the right wing. The center tank is in the fuselage and the inboard section of each wing.

Pressure Fueling System

The pressure refueling system fuels each fuel tank. The P15 fueling panel, on the right wing, controls fueling operations. There is no over wing fueling capability.

Engine Fuel Feed System

The engine fuel feed system supplies fuel from the fuel tanks to the engines. The fuel control panel controls engine fuel feed. The engines use fuel from the center tank before the main tanks.

APU Fuel Feed

The APU fuel feed system supplies fuel to the APU. The APU usually receives fuel from main tank 1. However, with use of the fuel boost pump switches, any fuel tank can supply fuel to the APU.

Defuel System

The defuel system permits the removal of fuel from each tank. It also permits the transfer of fuel between tanks on the ground.

Fuel Quantity Indicating System

The fuel quantity indicating system (FQIS) shows fuel weight of the main tanks and the center tank on the common display system (CDS) and the P15 refuel panel.

Total fuel weight shows in the flight management computer system (FMCS) data on the CDU.

Fuel Temperature Indicating System

Main tank 1 fuel temperature shows on the fuel control panel.



28-00-00

SIA ALL EFFECTIVITY


D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details


FUEL SYSTEM - GENERAL DESCRIPTION

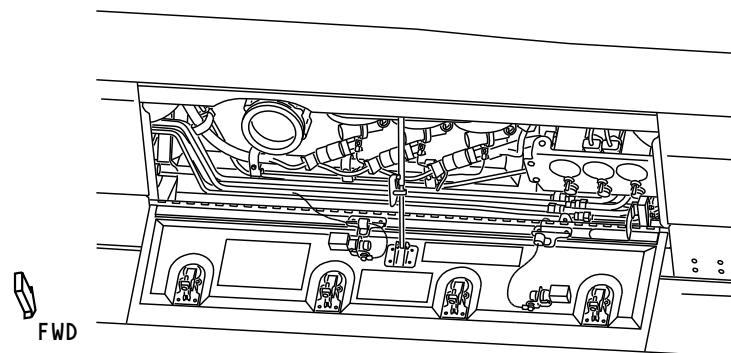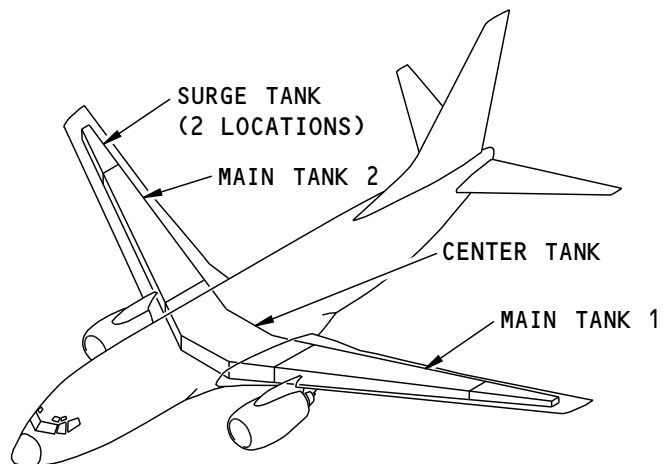


FUELING STATION

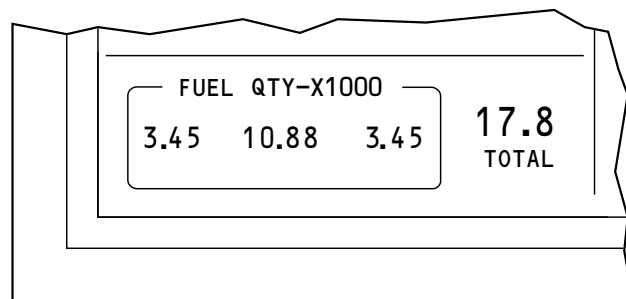

ENGINE DISPLAY (EXAMPLE)

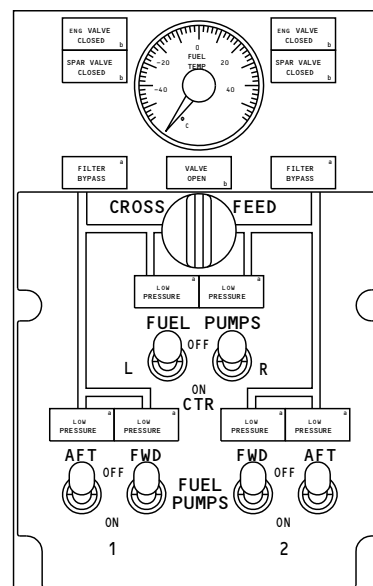

FUEL CONTROL PANEL (P5)

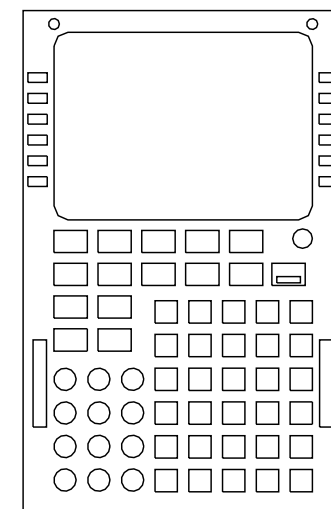

CDU

NOTE: ALL INDICATIONS ARE DISPLAYED IN KILOGRAMS OR POUNDS.

1701196 S0000309335_V1

FUEL SYSTEM - GENERAL DESCRIPTION

28-00-00

28-00-00-001

SIA ALL	EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-10-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL STORAGE - GENERAL DESCRIPTION

Fuel Tank Arrangement

These are the fuel tanks:

- Main tank 1
- Main tank 2
- Center tank.

Surge tanks found outboard of each main tank collect fuel overflow and fuel from the vent system. The fuel in the surge tank will drain into the main tank when the airplane is at a constant velocity and cruise pitch angle. If the fuel level is high enough in the surge tank, fuel will drain out of the vent scoop.

Component Location

Main tank 1 is in the wing box of the left wing. Main tank 2 is in the wing box of the right wing. The center tank is in the fuselage and the left and right wing root.

Capacity

The capacity of main tank 1 is 8630 lb (3915 kg). The capacity of main tank 2 is 8630 lb (3915 kg). The capacity of the center tank is 28,803 lb (13,065 kg). Fuel tank capacity does not include surge tanks.

The capacity of each surge tank is 235 lb (107 kg).


28-10-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

FUEL STORAGE - GENERAL DESCRIPTION

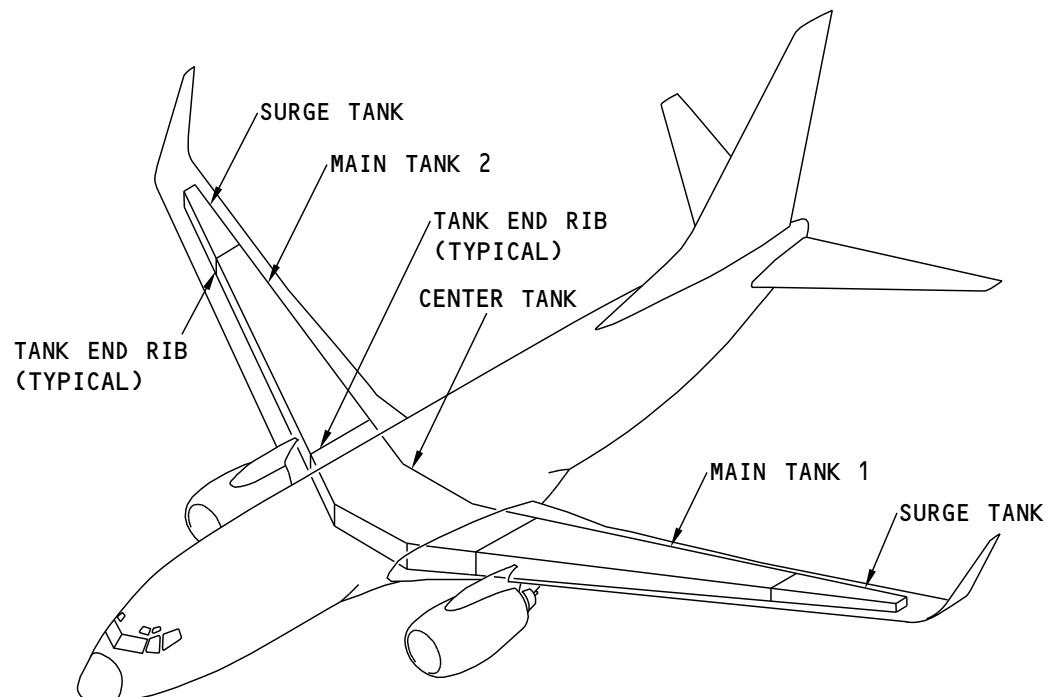

FUEL TANK CAPACITY		
	LB	KGS
MAIN TANK 1	8,630	3,915
MAIN TANK 2	8,630	3,915
CENTER TANK	28,803	13,066
TOTAL	46,063	20,896

NOTE: FUEL DENSITY 6.7
POUNDS PER US GALLON
(0.8029 KILOGRAMS
PER LITER)

M84549 S0004625983_V2

FUEL STORAGE - GENERAL DESCRIPTION

28-10-00

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**FUEL STORAGE - FUEL TANK ACCESS****General**

Wing fuel tank access panels permit entry into each fuel and surge tank. The wing fuel tank access panels are on the bottom wing skin. One center tank access panel permits entry into the center tank through the fuselage. This panel is in the left air conditioning compartment.

Wing ribs divide the fuel tanks into bays. Wing fuel tank access panels are between the wing ribs. Access across wing ribs to adjacent bays is through cutouts.

Wing rib 8, in main tank 1 and main tank 2, has check valves. The check valves let fuel flow inboard but do not let fuel flow outboard.

Tank end ribs close the ends of each fuel tank. There is no fuel flow through the tank end ribs.

Fuel Tank Locations

The side of body rib is rib 1. Main tank 1 is between rib 5 and rib 22. The location of main tank 2 is the same.

The center tank is between rib 5 in the left wing and rib 5 in the right wing.

The surge tank for main tank 1 and main tank 2 is between rib 22 and rib 25.


Fuel Tank Access Panels

The fuel tank access panels attach to the bottom wing skin with a clamp ring. An aluminum gasket supplies a proper fit and an electrostatic bond.

Impact resistant fuel tank access panels are in areas that are subject to impact damage. The three inboard fuel tank access panels, on each wing, are impact resistant panels.

EFFECTIVITY	
SIA ALL	

FUEL STORAGE - FUEL TANK ACCESS

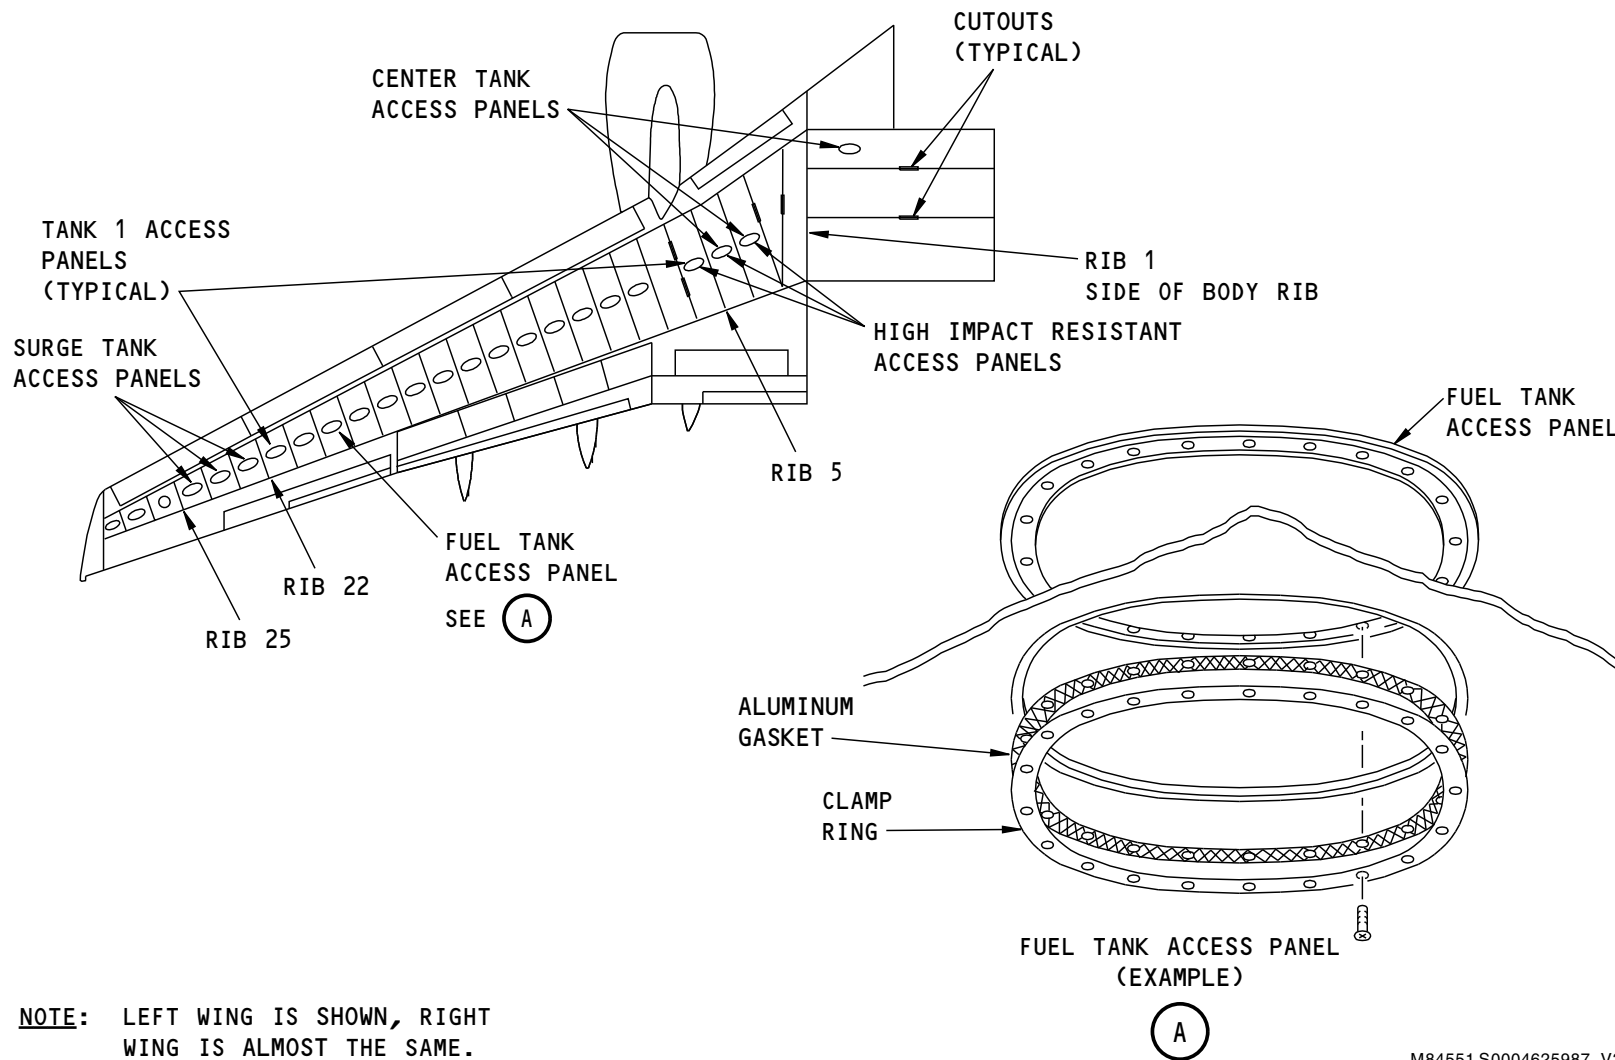

M84551 S0004625987_V3

FUEL STORAGE - FUEL TANK ACCESS

28-10-00

28-10-00-002

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL STORAGE - SUMP DRAIN VALVES

General

The sump drain valves let these drain from each fuel tank:

- Fuel
- Water
- Contamination.

Sump drain valves are at the low point of each tank. The sump drain valves in these tanks attach to the bottom wing skin:

- Main tank 1
- Main tank 2
- Surge tank.

The sump drain valve in the center tank attaches to the lower wing skin panel.

Component Location

The sump drain valve for main tank 1 and main tank 2 is outboard of rib five.

The sump drain valve for the center tank is near the center of the tank. You get to the sump drain valve from an access door on the lower fuselage skin. The access door is between the two air conditioning access doors.

The sump drain valve for the surge tanks is outboard of rib 22. The sump drain valve is on the bottom of the wing.

Operation

The procedure to drain fluid from these tanks is the same:

- Main tank 1
- Main tank 2
- Surge tank.

To open the sump drain valve, push up on the center of the valve. An internal spring closes the sump drain valve.

To drain fluid from the center tank, open the access door and pull down on the rod. An internal spring closes the sump drain valve.

Training Information Point

You can replace the primary seal of a main tank sump drain valve by removing the valve core plug and valve poppet. Defueling the main tank is not necessary. However, you must defuel the tank if you need to replace the whole main tank drain valve.


You may replace the center tank sump drain assembly without defueling the center tank.

28-10-00

EFFECTIVITY	
SIA ALL	

D633A101-SIA

FUEL STORAGE - SUMP DRAIN VALVES

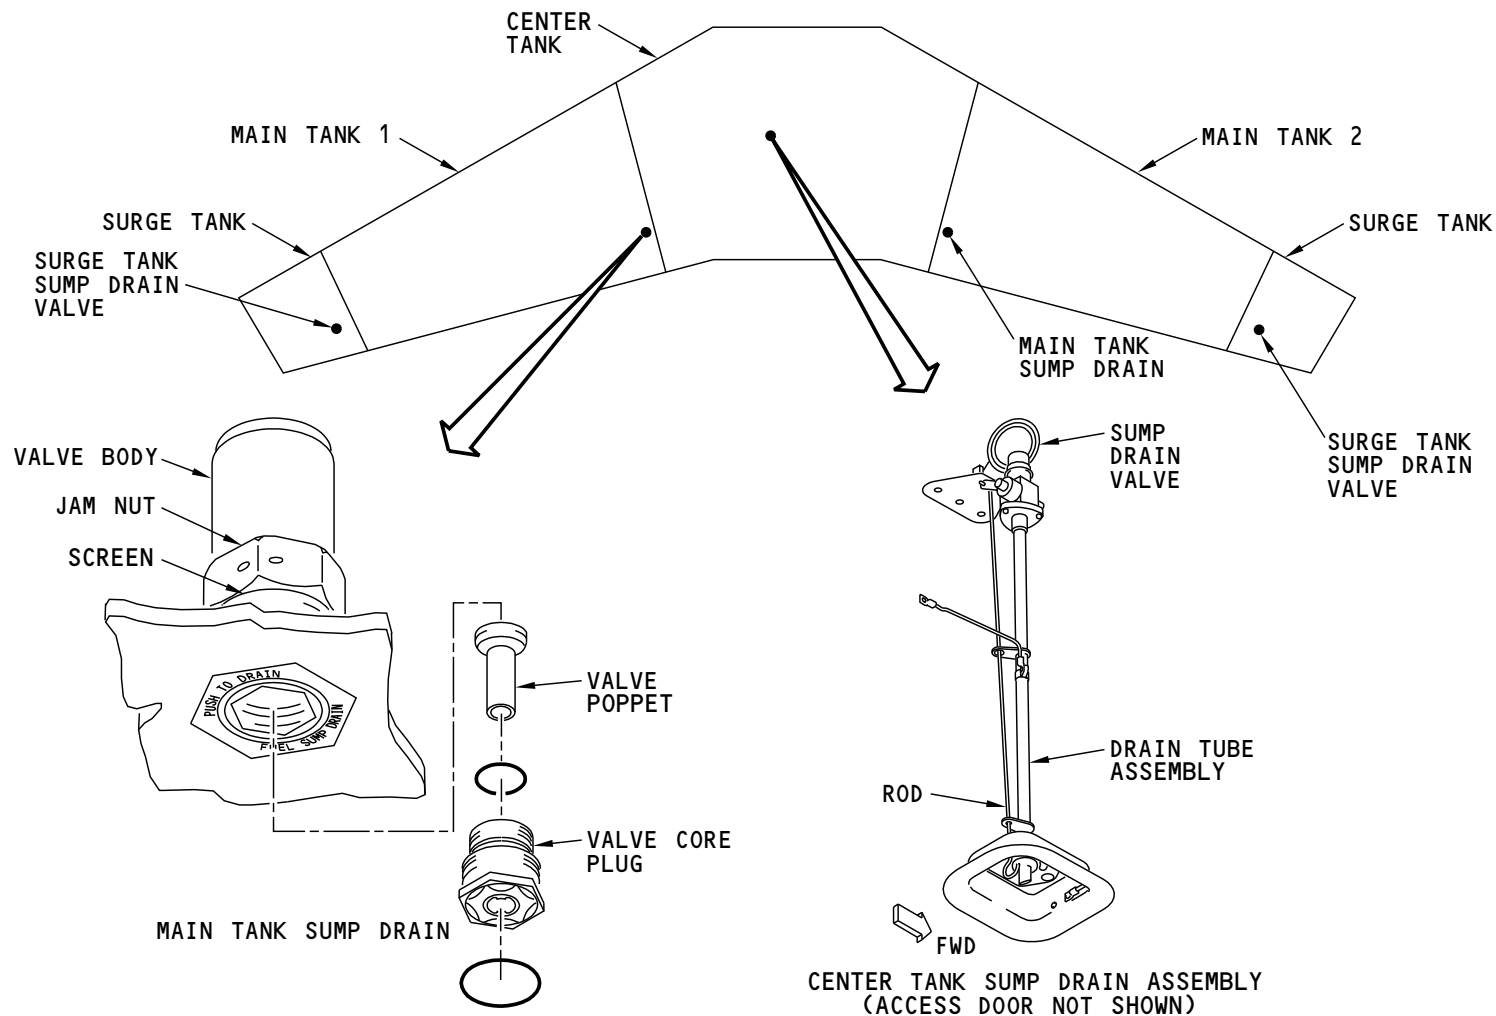

M84552 S0004625989_V1

FUEL STORAGE - SUMP DRAIN VALVES

28-10-00

28-10-00-003

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL STORAGE - FUEL VENT SYSTEM

General

The fuel vent system keeps the pressure of the fuel tanks near the ambient pressure. Too large a pressure difference can cause damage to the wing structure.

Drains let fuel in the vent system return to the tanks.

Flame arrestors make sure excessive heat does not enter the fuel vent system. A clogged flame arrestor causes the pressure relief valve in the surge tank to open. When open, the pressure relief valve becomes another vent for the fuel vent system.

Component Locations

Stringers and the upper wing skin make the vent channels. The vent channels have drain float valves in the center tank.

Vent tubes attach to vent channels. Each vent tube has a drain float valve.

A fuel vent float valve is on the outboard fuel tank end rib in main tank 1 and main tank 2.

A surge tank drain check valve is on the outboard fuel tank end rib in main tank 1 and main tank 2.

The vent scoop and pressure relief valve are on an access door in each surge tank.

Functional Description

Vent channels and vent tubes equalize the pressure between each tank and the surge tanks when the airplane is in a climb attitude. The surge tanks are open to the atmosphere through the vent scoop.

The fuel vent float valves equalize the pressure between main tank 1, main tank 2, and the surge tanks when the airplane is in a cruise or descent attitude.

The drain float valves in the vent tubes and the vent channels permit fuel in the vent system to drain into the tank when the fuel level is lower than the valve.

The surge tank drain check valve permits fuel in the surge tank to flow to either main tank 1 or main tank 2. The surge tank drain check valve also prevents fuel flow from main tank 1 and main tank 2 to the surge tank.

The pressure relief valve prevents damage to the wing structure when there is too much positive or negative pressure in the fuel tanks. The pressure relief valve is usually closed. When closed, it is even with the bottom surface of the wing. When there is too much positive or negative pressure, the pressure relief valve opens. When it is open, part of the pressure relief valve is in the fuel tank. After it opens, the pressure relief valve stays in the open position. In the open position, the pressure relief valve supplies an additional vent in the surge tank. Pull the reset handle to move the pressure relief valve to the closed position.

For normal operations, make sure the pressure relief valve is closed. An open pressure relief valve is a symptom of a problem in the fuel vent system.

28-10-00


EFFECTIVITY

SIA ALL

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

FUEL STORAGE - FUEL VENT SYSTEM

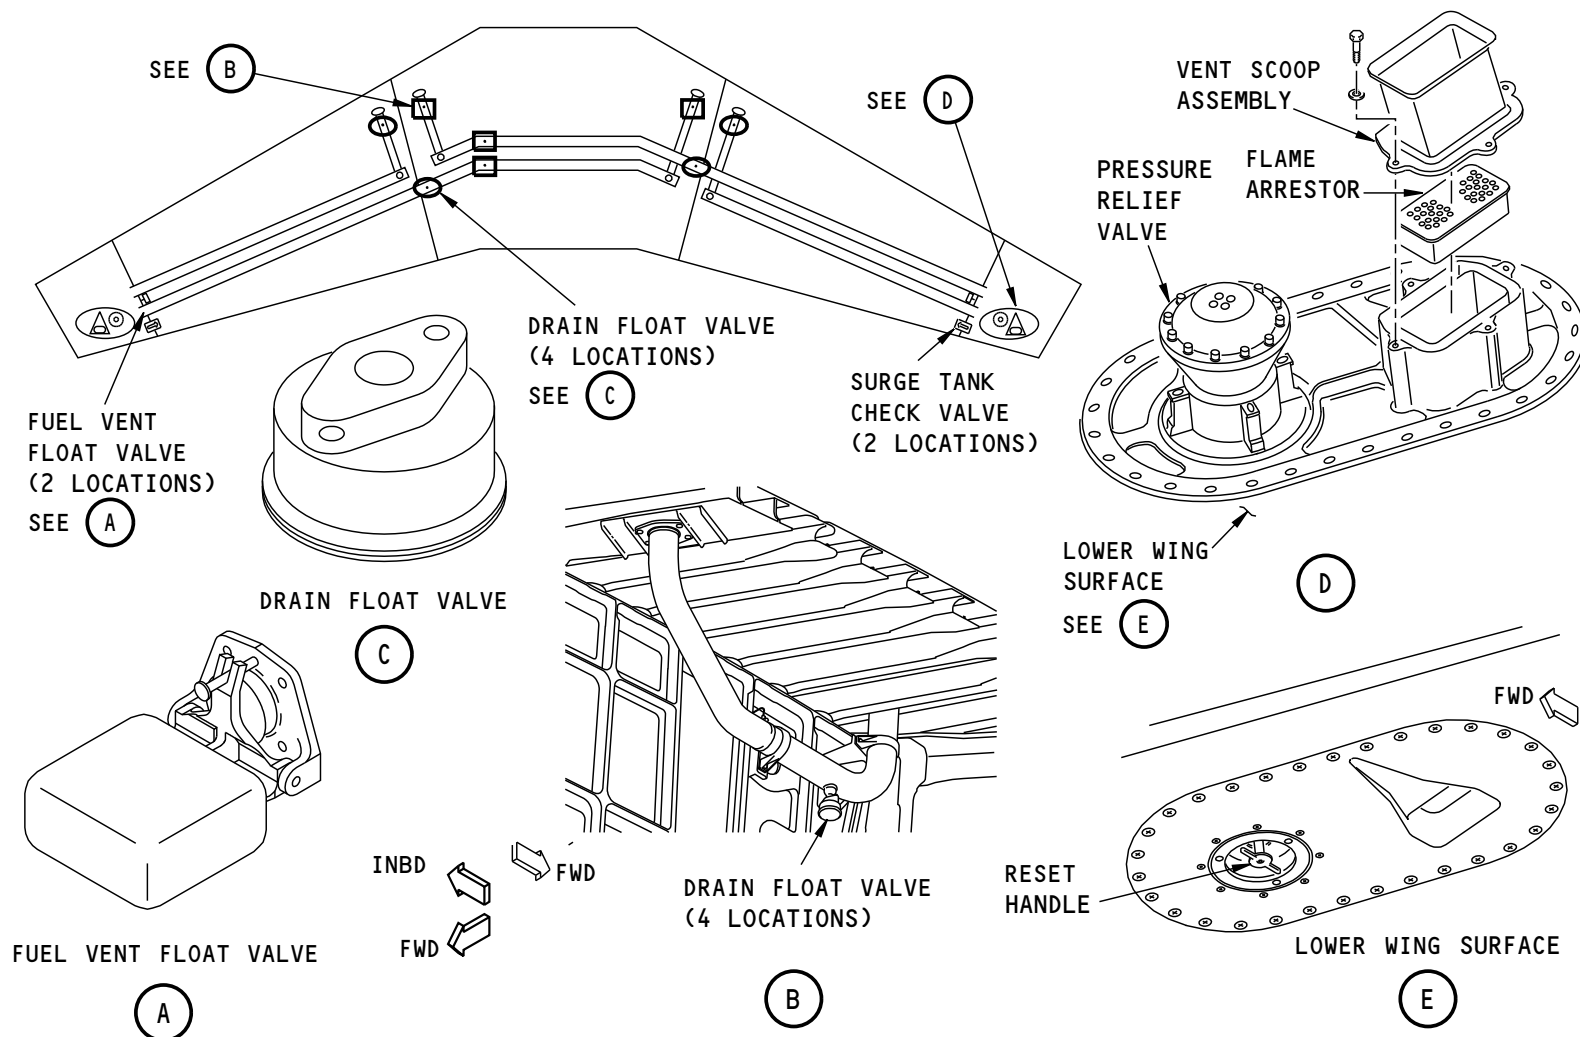

2189164 S0000485718_V1

FUEL STORAGE - FUEL VENT SYSTEM

28-10-00-004

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-10-00



FUEL STORAGE - CENTER TANK SCAVENGE SYSTEM

General

The center tank fuel scavenge system increases the quantity of fuel you can use.


Functional Description

The left forward boost pump supplies motive flow to a jet pump. The jet pump removes fuel from the center tank and transfers it to main tank 1. The jet pump has no parts that move. It is on the left front spar. A fuel scavenge shutoff valve controls fuel sent to main tank 1. When the fuel level in main tank 1 decreases to 4,487 lbs (1,990 kgs) the float valve opens.

The minimum fuel transfer rate for the fuel scavenge system is 220 lbs/hour (100 kgs/hour). The fuel transfer rate for the fuel scavenge system is generally between 220 lbs/hour (100 kgs/hour) and 450 lbs/hour (200 kgs/hour).

EFFECTIVITY	
SIA ALL	

FUEL STORAGE - CENTER TANK SCAVENGE SYSTEM

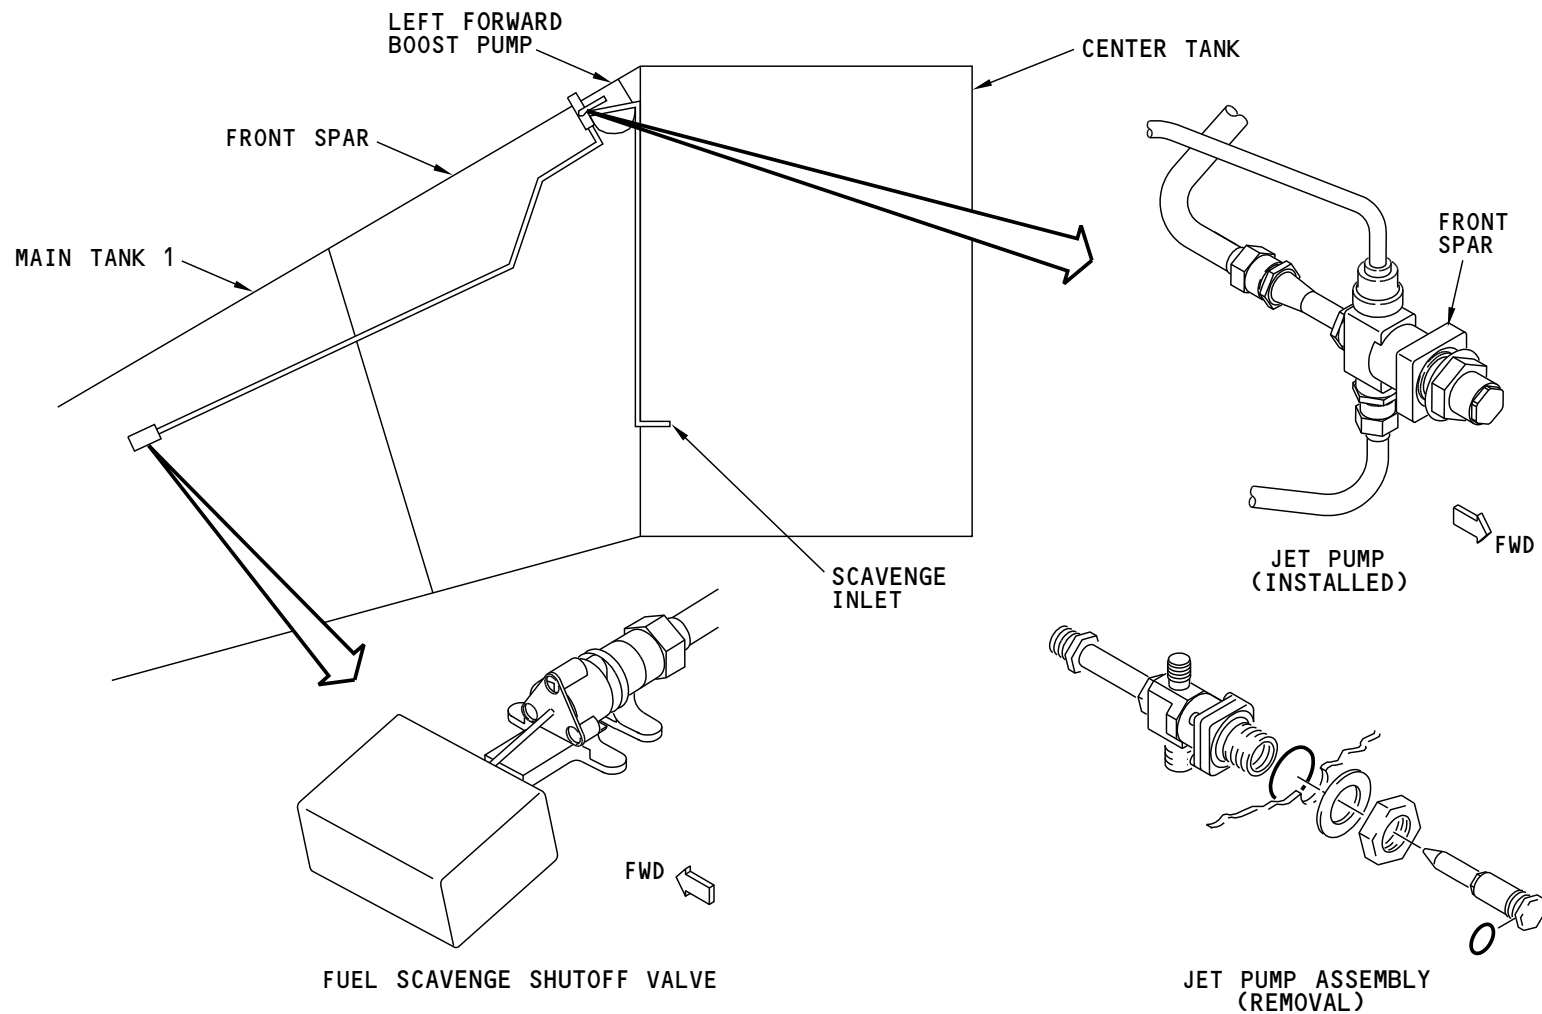

M84555 S0004625994_V1

FUEL STORAGE - CENTER TANK SCAVENGE SYSTEM

28-10-00-005

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-10-00



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-21-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details




PRESSURE FUELING SYSTEM - INTRODUCTION

General


The pressure fueling system lets you refuel all tanks. You also use the system during fuel transfer from tank to tank.

SIA ALL	EFFECTIVITY
	D633A101-SIA

PRESSURE FUELING SYSTEM - INTRODUCTION

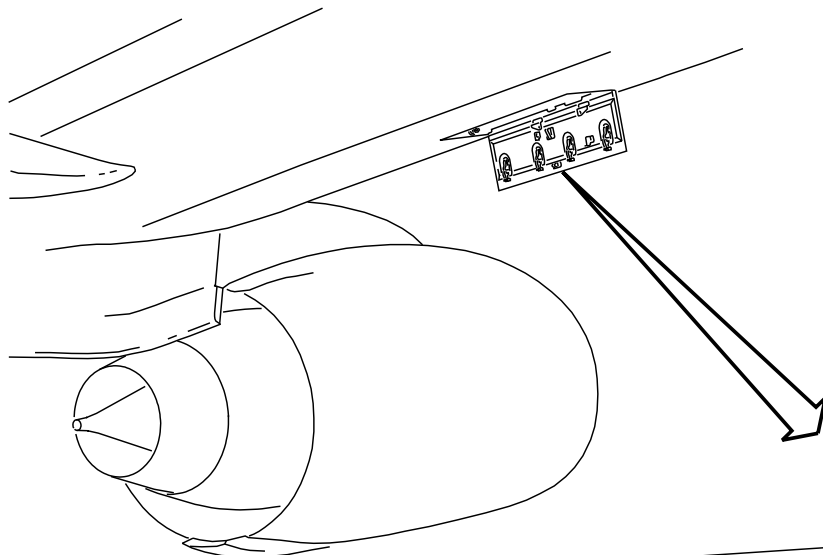

LOWER RIGHT WING

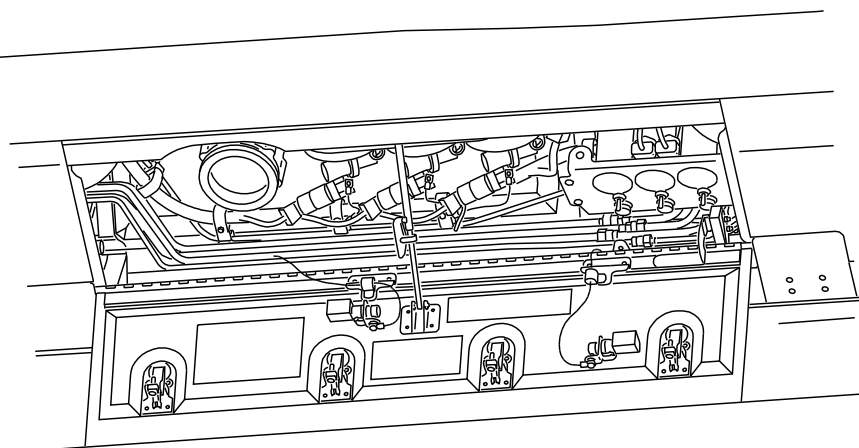

FUELING STATION (P15)

M84573 S0004626031_V1

PRESSURE FUELING SYSTEM - INTRODUCTION

28-21-00

PRESSURE FUELING SYSTEM - GENERAL DESCRIPTION

General

All tanks fill from the fueling station at the right wing. The fueling station has these components:

- Fueling panel
- Refuel manifold
- Fueling receptacle
- Fueling shutoff valves (3).

The outlet end of the refuel manifold for the main tank No. 1 has a drain float valve and a check valve. The drain float valve lets fuel that remains in the refuel manifold drain into main tank No. 1 when the fuel level decreases. The check valve prevents fuel transfer from main tank No. 1 when the refuel manifold is damaged.

Control

The fueling station permits automatic and manual control of the fueling shutoff valves. The fueling station receives 28v dc hot battery bus power through the refueling power control relay. The relay energizes when you open the door of the fueling station. Power from the relay comes from one of these sources:

- Battery bus
- DC bus 1
- Bus power control unit (BPCU) internal transformer rectifier.

You use the fueling indication test switch to supply an alternative ground for the refueling power control relay.

You can refuel the airplane with any one of these electrical power sources:

- External power on electrical system buses
- External power connected to the airplane, but not on electrical system buses
- APU generator
- Battery power (battery switch must be on).

You use the preselect switch of the indicator to select the total amount of fuel you want to put into the tank. The solenoid for a fueling shutoff valve energizes when you put the control switch to the OPEN position. The valve then opens if fuel pressure is available. The indicator removes power to the fueling shutoff valve when the fuel gets to the selected quantity. You also remove power when you put the control switch to close. Without electrical power, the valve closes.

There is also a manual override plunger on each fueling shutoff valve. The plunger and fuel pressure let you open the valve if the solenoid fails.

Indication

Three valve position lights show that there is power to the fueling shutoff valves. The light does not show that the valve is open. These lights are press-to-test. Three fueling indicators show fuel quantity in each tank.


28-21-00

EFFECTIVITY	
SIA ALL	

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

PRESSURE FUELING SYSTEM - GENERAL DESCRIPTION

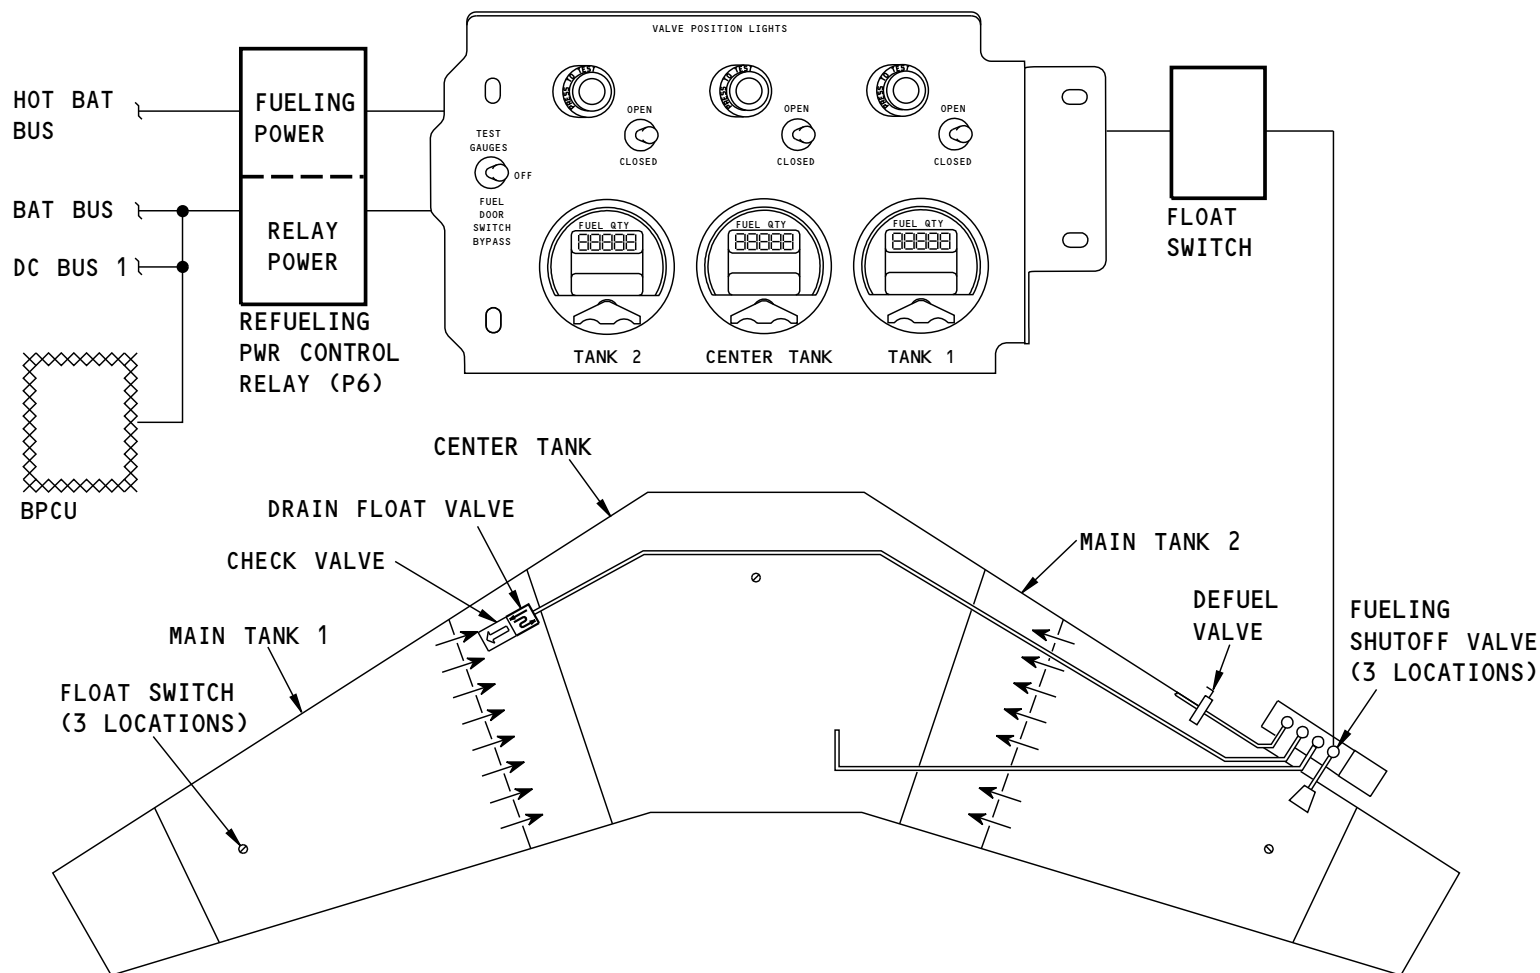

M84574 S0004626035_V2

PRESSURE FUELING SYSTEM - GENERAL DESCRIPTION

28-21-00-001

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-21-00



PRESSURE FUELING SYSTEM - COMPONENT LOCATION

General


These pressure fueling system components are at the fueling station:

- Fueling receptacle
- Fueling manifold body
- Fueling check valve
- Fueling body/elbow assembly
- Fueling shutoff valve
- Fueling power control switch
- Fueling panel.

A fueling float switch is in each tank.

SIA ALL	EFFECTIVITY
	D633A101-SIA

PRESSURE FUELING SYSTEM - COMPONENT LOCATION

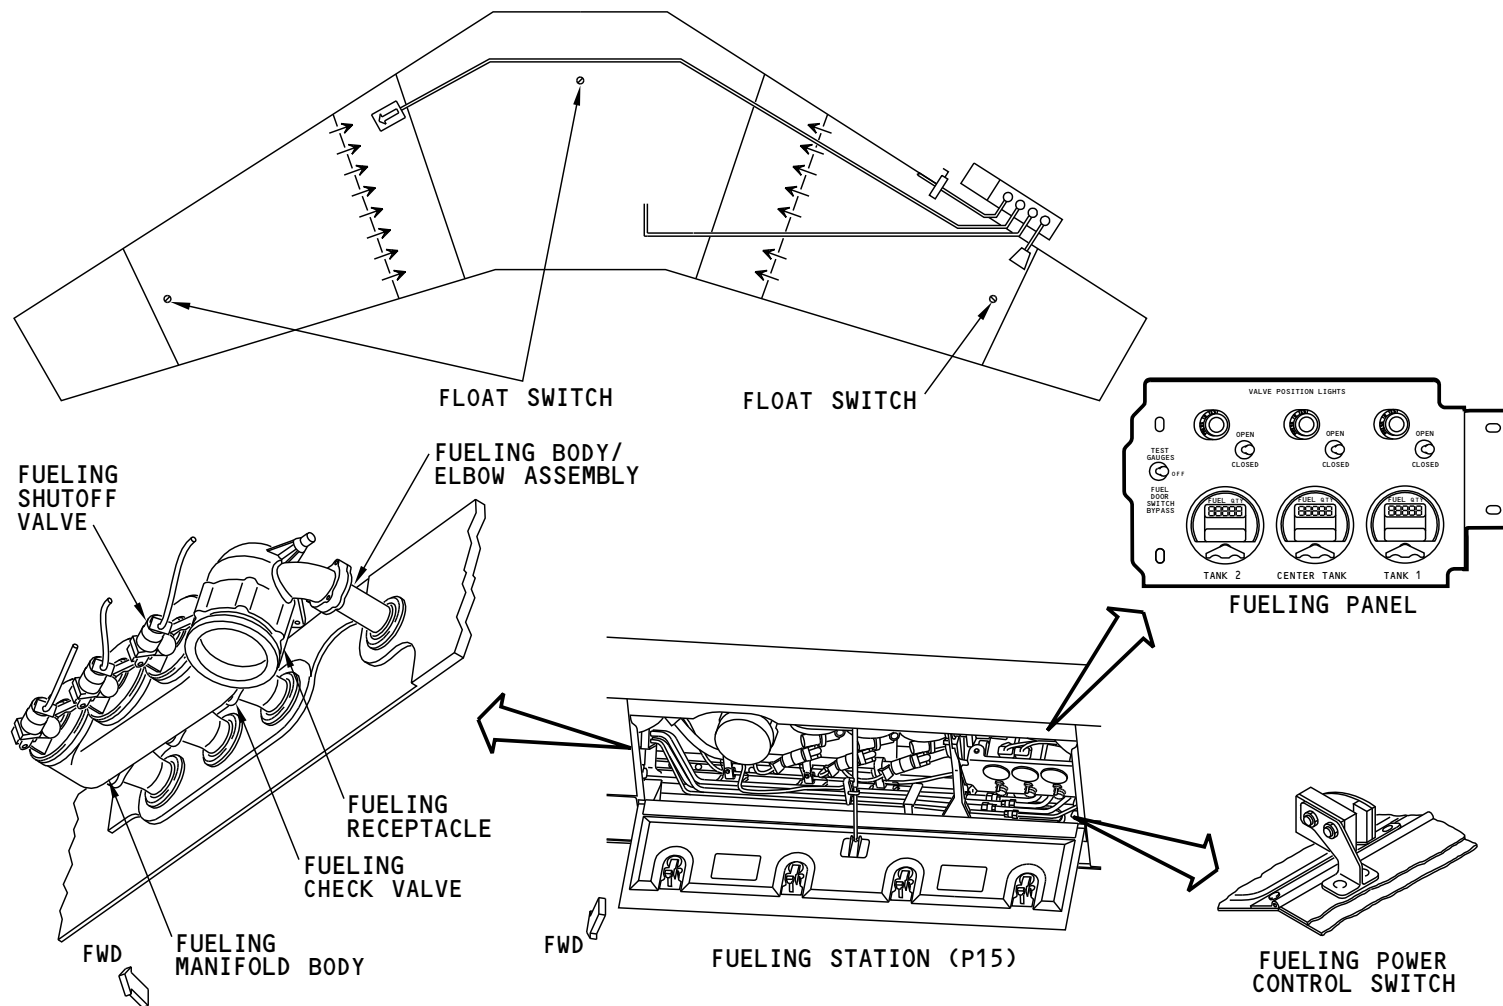

M84578 S0004626039_V1

PRESSURE FUELING SYSTEM - COMPONENT LOCATION

28-21-00-002

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-21-00

**PRESSURE FUELING SYSTEM - P15 FUELING PANEL****General**

The P15 fueling panel has these components:

- Fueling valve open lights
- Fueling indication test switch
- Fueling valve control switch
- Fuel indicators
- Fueling power control switch.

Fueling Valve Open Lights

The blue valve position lights come on when the fueling shutoff valve solenoids have power.

Fueling Indication Test Switch

The fueling indication test switch is a three-position switch. The switch is spring loaded to the center (neutral) position. When the switch is in the FUEL DOOR SWITCH BYPASS position, the power control relay receives ground. The normal ground for this relay is through the fueling power control switch. This relay controls power for fueling.

When the switch is in the TEST GAUGES position, the fuel indicators do a display test. Fuel quantity in the flight compartment does not change during this test.

The FUEL DOOR SWITCH BYPASS position and the TEST GAUGES position are momentary positions.

Fueling Valve Control Switches

The fueling valve control switches are two-position switches. The fueling valve solenoid energizes when you put the switch in OPEN and power is available. The valve opens if fuel pressure is available at the fueling manifold. In the CLOSED position, the fueling valve solenoid de-energizes and the valve closes.

Fuel Indicators

The indicators are amber LED displays. They use 28v dc to operate.

The fuel indicators show fuel quantity in a digital format. Fuel quantity shows in kilograms or pounds.

The preselect switch lets you select a total fuel tank quantity at which fueling stops. During fueling, when the fuel quantity in the fuel tank equals the preselect quantity, the fueling valves close.

The indicators have a tank overfill indication. The fuel quantity indication will blink on and off at a one second interval if the quantity is more than the rated capacity of that tank. Flight compartment fuel quantity indication does not blink.

Fueling Power Control Switch

The fueling power control switch closes to supply an electrical ground for the R11 fueling power control relay. The control switch closes when the fueling station door opens and the magnet is near the switch. The switch opens when the door closes and the magnet goes away from the switch.

Training Information Point

If the fueling station door is open and the fueling station does not have power, move the fueling indication test switch to the FUEL DOOR SWITCH BYPASS position. This supplies hot battery bus power to the fueling station.


28-21-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

PRESSURE FUELING SYSTEM - P15 FUELING PANEL

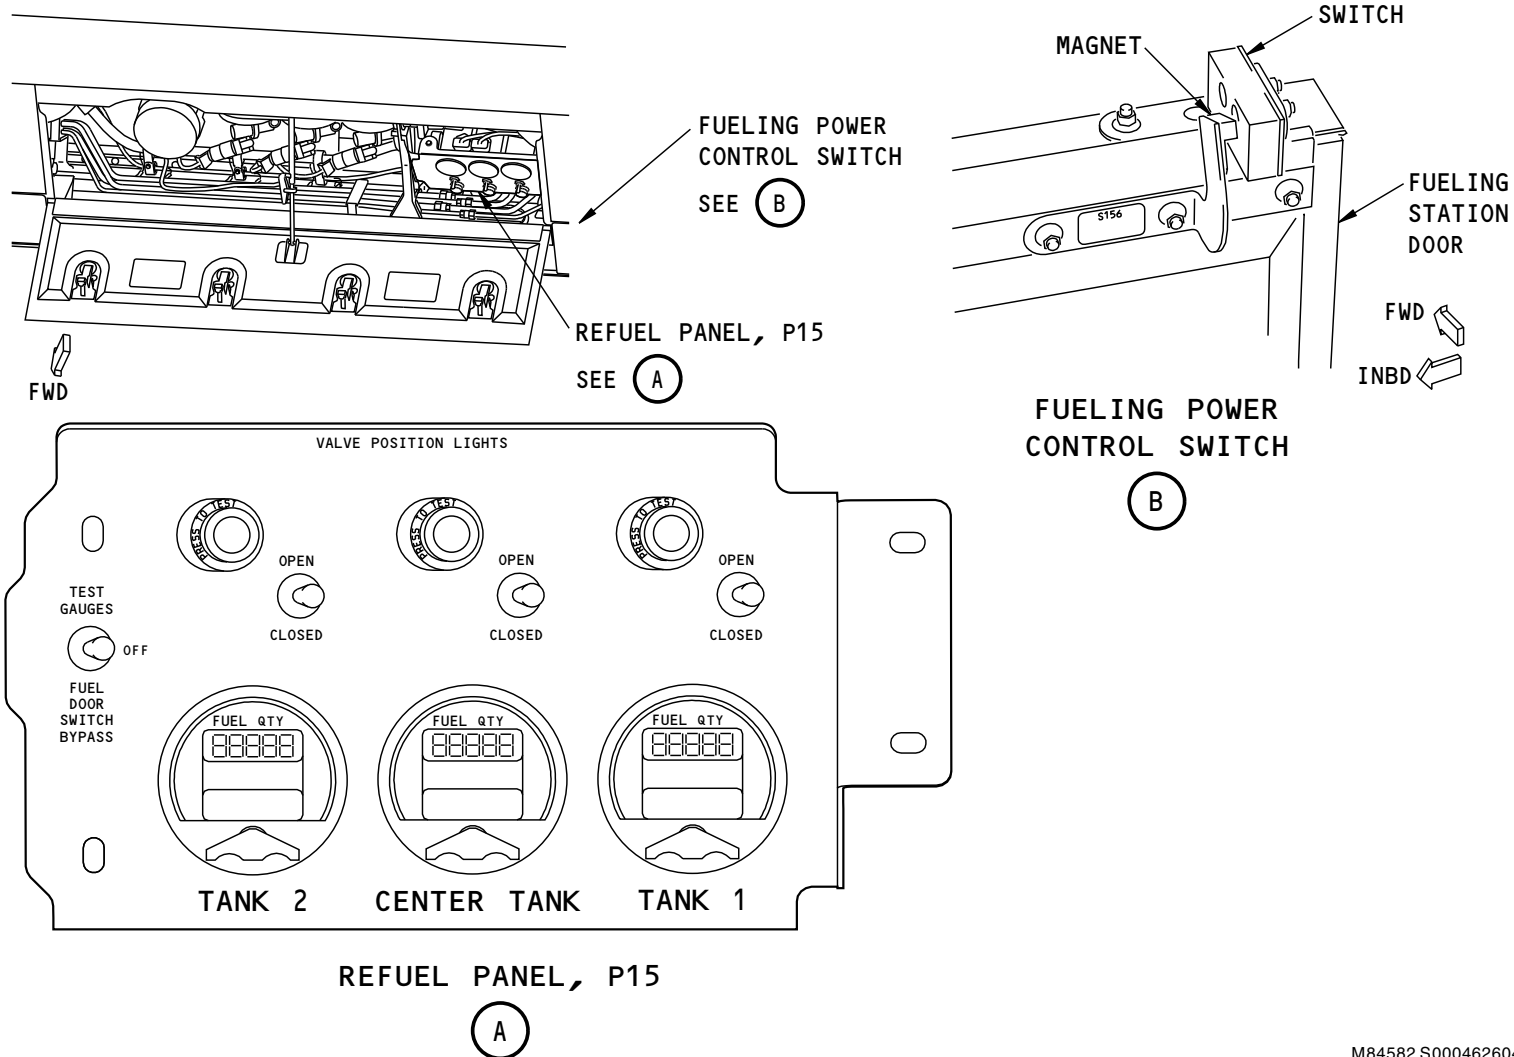

PRESSURE FUELING SYSTEM - P15 FUELING PANEL

M84582 S0004626044_V2

**PRESSURE FUELING SYSTEM - FUELING MANIFOLD****General**

These components are in the fueling manifold assembly:

- Fueling receptacle
- Fueling manifold body
- Fueling valves
- Fueling check valves
- Defuel port.

Fueling Receptacle

The fueling receptacle supplies a connection for the fueling hose.

Fueling Manifold Body

The fueling manifold body supplies fuel from the fueling receptacle to the fueling shutoff valves.

Fueling Valves

The fueling valves control fuel flow to the fuel tanks. A solenoid controls the valve while fuel pressure operates the valve. A manual override plunger on each valve permits manual operation.

Fueling Check Valve

The fueling check valves permit fueling receptacle manifold replacement without the removal of fuel from each tank.

Defuel Port

The defuel port lets you to bring fuel from each tank to the fueling manifold for fuel transfer or defueling operation.


28-21-00

SIA ALL	EFFECTIVITY
---------	-------------

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

PRESSURE FUELING SYSTEM - FUELING MANIFOLD

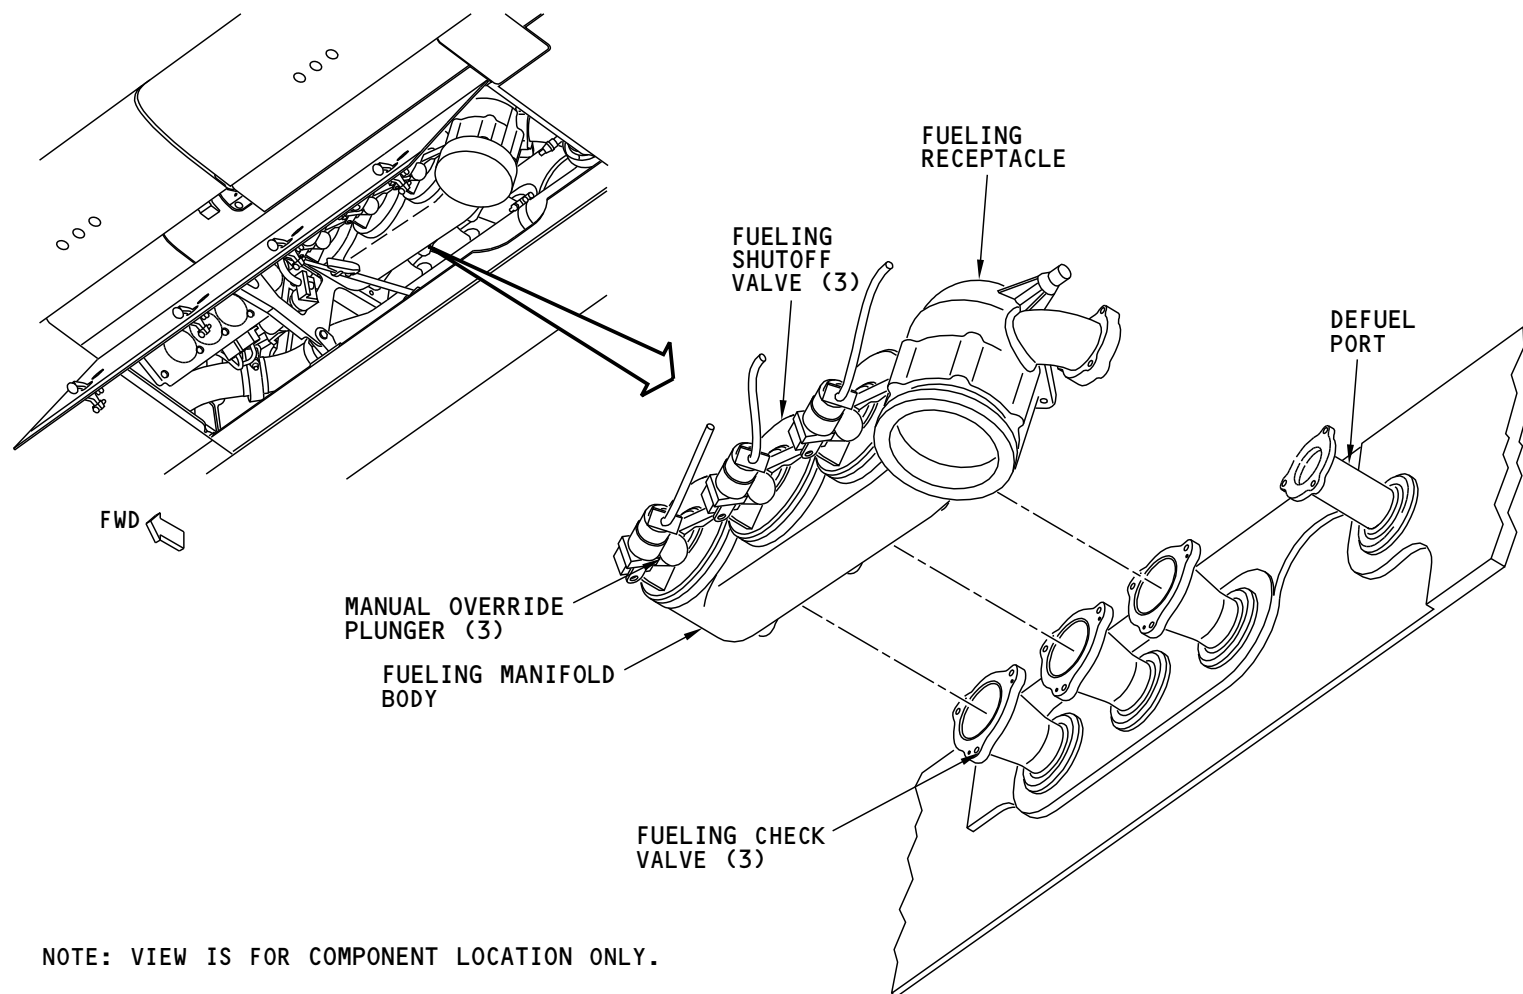

M84586 S0004626049_V1

PRESSURE FUELING SYSTEM - FUELING MANIFOLD

28-21-00

**PRESSURE FUELING SYSTEM - FUELING FLOAT SWITCHES****General**

The fueling float switches prevent over-fueling the fuel tanks.

The fueling float switches remove power to the fueling valves when the fuel level in the tank is full.

The fueling float switches have a float that is in a cylindrical container. When the tank is less than full, the float switch lets power go to the fueling valve solenoid. When the tank gets full, the fueling float switch removes power to the fueling valve solenoid.

Training Information Point

The conduit contains a polymer protective liner material to eliminate wire damage from chafing.


28-21-00

EFFECTIVITY	
SIA ALL	

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

PRESSURE FUELING SYSTEM - FUELING FLOAT SWITCHES

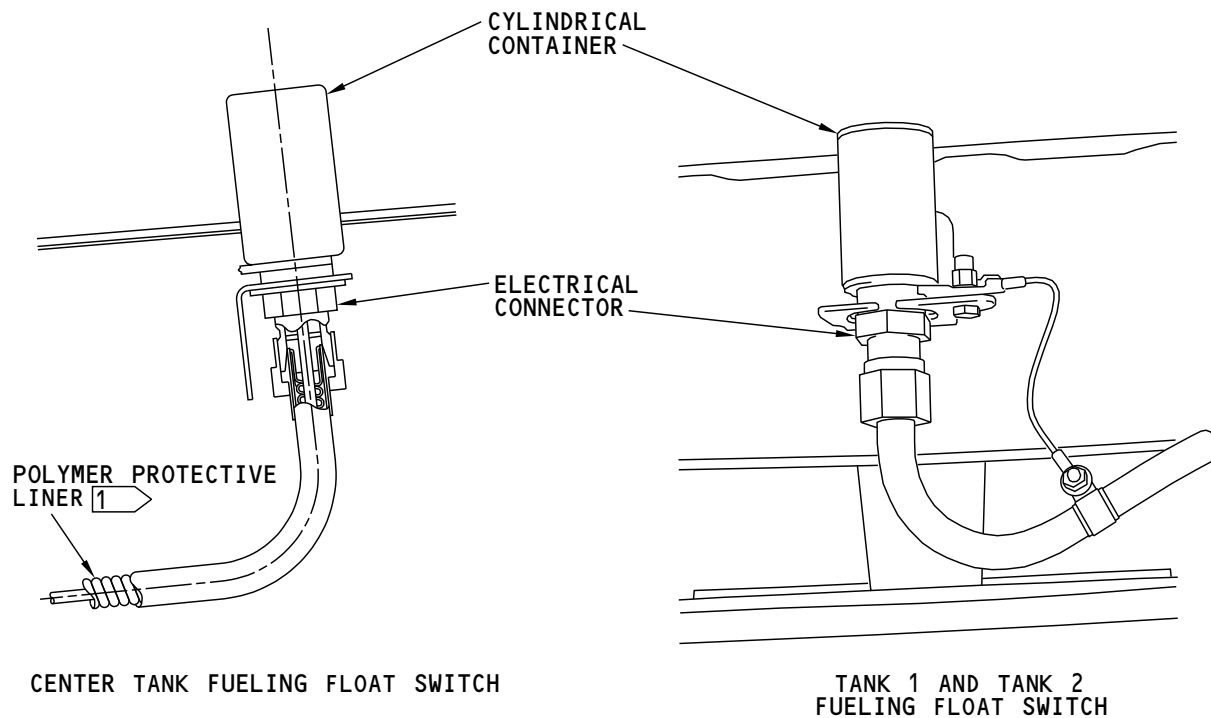

1 POLYMER PROTECTIVE LINER IN ALL FLOAT SWITCH CONDUIT

M84588 S0004626052_V1

PRESSURE FUELING SYSTEM - FUELING FLOAT SWITCHES

28-21-00

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**PRESSURE FUELING SYSTEM - FUNCTIONAL DESCRIPTION - POWER AND CONTROL****General**

Power for the pressure fueling system comes from the 28v dc hot battery bus. When the fueling station receives power, the outboard fueling panel flood light and the outboard fueling nozzle flood light come on. The fueling indicators also receive power.

Hot Battery Bus

When the fueling panel door opens, the refueling power control relay energizes. This sends hot battery bus power to the fueling panel.

Fueling Valve Open Control

The fueling valves open when all of these conditions are true:

- There is power to the fueling panel
- Fueling valve control switch is in the OPEN position
- Fueling float switch is in the not full position
- The fueling valve solenoid energizes
- Fuel pressure is at the fueling valve.

Fueling Valve Open Light - On

The fueling valve open light comes on when there is power to the fueling valve solenoid. The light does not show that the fueling valve is open. The solenoid must have power and the valve must have fuel pressure to open.

Fueling Valve Closed Control

The fueling valves close when any of these conditions are true:

- Fueling panel does not have power
- Fueling valve control switch is in the CLOSED position
- Quantity of fuel in the fuel tank equals the preselect fuel quantity
- Fueling float switch is in the full position
- No fuel pressure is at the fueling valve.

Fueling Valve Open Light - Off

The fueling valve open light goes off when there is no power to the fueling valve solenoid.

Fuel Indication Test Switch

When the switch is in the FUEL DOOR SW BYPASS position, the fueling panel receives 28v dc hot battery bus power.

Put the switch in the TEST GAUGES position to do a test of the fueling indicators.


28-21-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

PRESSURE FUELING SYSTEM - FUNCTIONAL DESCRIPTION - POWER AND CONTROL

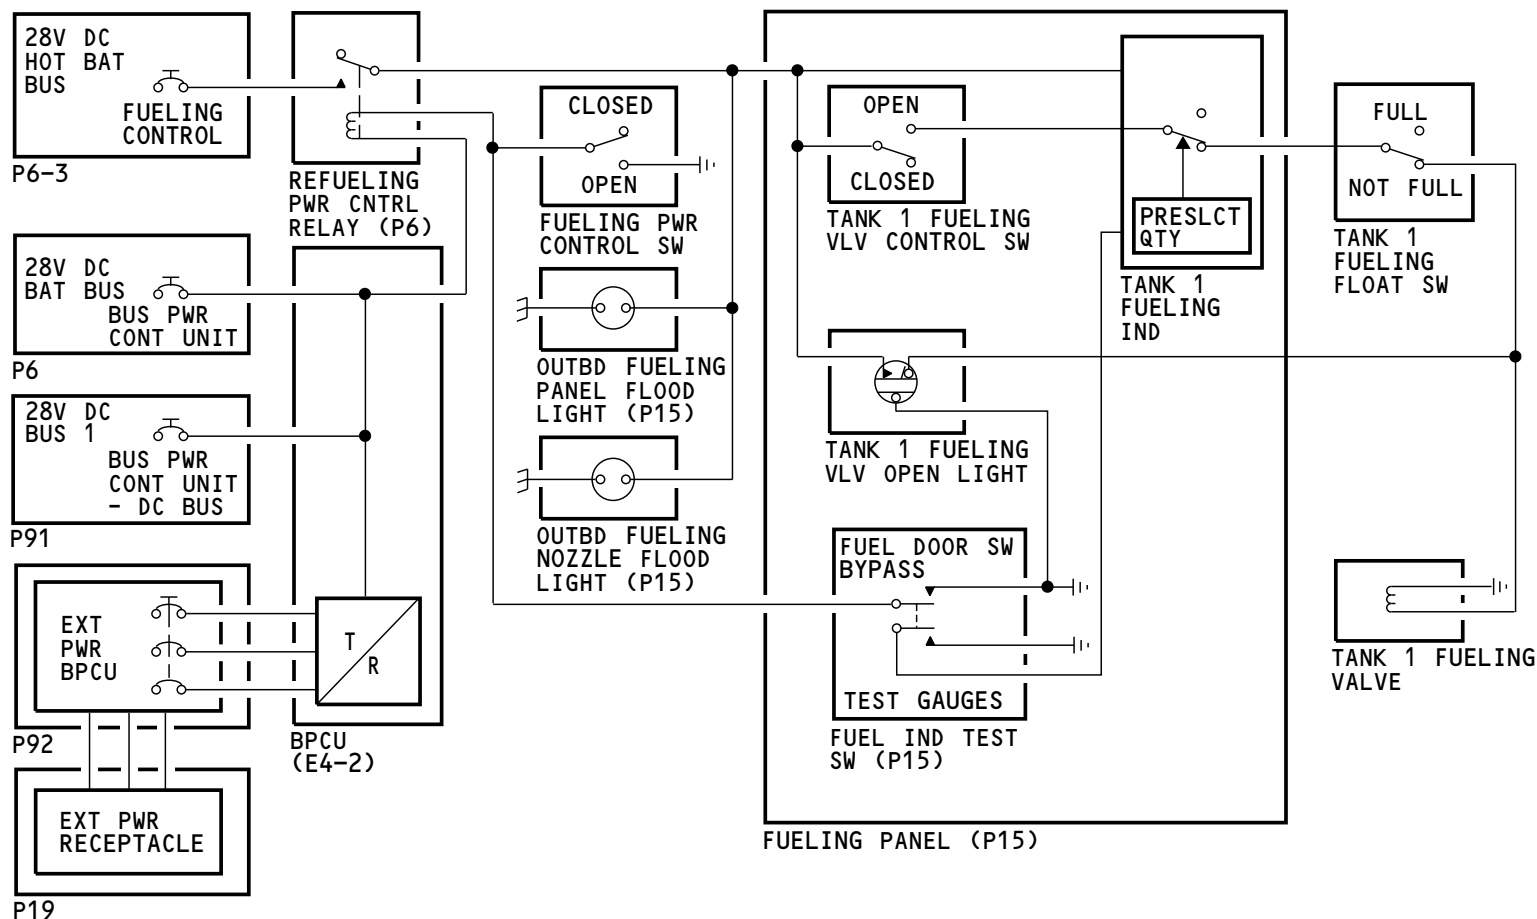

M84590 S0004626055_V1

PRESSURE FUELING SYSTEM - FUNCTIONAL DESCRIPTION - POWER AND CONTROL

28-21-00

SIA ALL	EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

PRESSURE FUELING SYSTEM - OPERATION

General

Fueling placards, with instructions for fueling, are on the fueling station door. Use these placards when fueling the aircraft.

The fueling station receives power when the fueling station door opens.

Training Information Point**CAUTION**

DO NOT USE WIDE CUT FUEL WHEN IT IS NOT PERMITTED. A FLAMEOUT CAN OCCUR AND ENGINE POWER CAN DECREASE SUDDENLY.

Wide cut fuel is not certified for use on the Boeing 737-600/700/800/900/BBJ model of the airplane. Wide cut fuel is fuel which satisfies ASTM D1655, Jet B or MIL-T-5624, JP-4. Wide cut fuel contains both kerosene and naphtha (gasoline) fractions.


28-21-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

PRESSURE FUELING SYSTEM - OPERATION

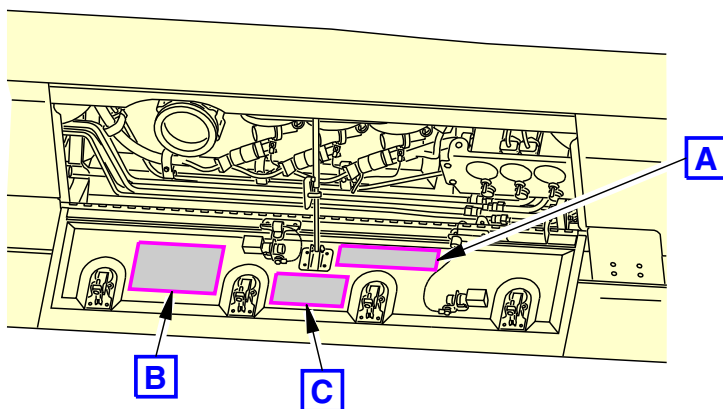

USABLE FUEL CAPACITY		
TANK NO. 1	CENTER TANK	TANK NO. 2
XX U.S. GALLONS	XX U.S. GALLONS	XX U.S. GALLONS
XX LITERS	XX LITERS	XX LITERS

(EXAMPLE)

A

FUELING INSTRUCTIONS

1. INSTALL GROUNDING JACKS AND COUPLE FUELING NOZZLE.
2. TOGGLE SWITCH TO "TEST GAGES" POSITION-VERIFY ALL UPPER AND LOWER DISPLAYS READ 88888.
3. PRESS BLUE "VALVE POSITION LIGHTS"-VERIFY LIGHTS ILLUMINATE.
4. OPEN CONTROL SWITCHES FOR TANKS TO BE SERVICED. BEGIN FUEL FLOW.
- CAUTION-FLASHING UPPER GAGE INDICATES MAXIMUM TANK CAPACITY HAS BEEN EXCEEDED. STOP FUELING AT TRUCK.
5. CLOSE CONTROL SWITCHES WHEN FUELING STOPS AT FULL TANK OR DESIRED QUANTITY IS REACHED.
6. UNCOUPLE NOZZLE AND REMOVE JACKS.
7. VERIFY ALL CONTROL SWITCHES ARE RETURNED TO THE OFF POSITION AND BLUE "VALVE POSITION LIGHTS" ARE OFF.

NOTE:

BLUE LIGHT INDICATES VALVE ENERGIZED OPEN FOR FUELING OPERATION.

CAUTION

DO NOT EXCEED 55 PSIG/379 kPa FUEL PRESSURE.
MINIMUM DEFUEL PRESSURE IS -5 PSIG/-35 kPa.
SERVICE THIS AIRPLANE WITH
JET FUEL SPEC. GE D50TF2 EXCEPT:
DO NOT USE WIDE CUT FUELS
(CLASS B PER GE D50TF2, JET B OR JP-4)

(EXAMPLE)

C

(EXAMPLE)

B

PRESSURE FUELING SYSTEM - OPERATION

M84591 S0004626057_V2

28-21-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-22-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



ENGINE FUEL FEED - INTRODUCTION



General

The engine fuel feed system supplies fuel to the engines from main tank 1, main tank 2, and the center tank.


You operate the engine fuel feed system from the fuel control panel (P5-2) and the engine start levers in the control stand.

SIA ALL	EFFECTIVITY
	D633A101-SIA

ENGINE FUEL FEED - INTRODUCTION

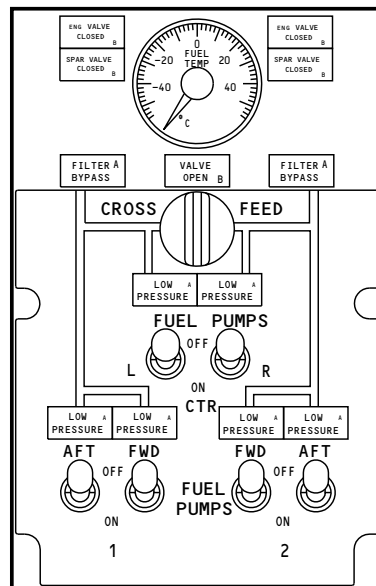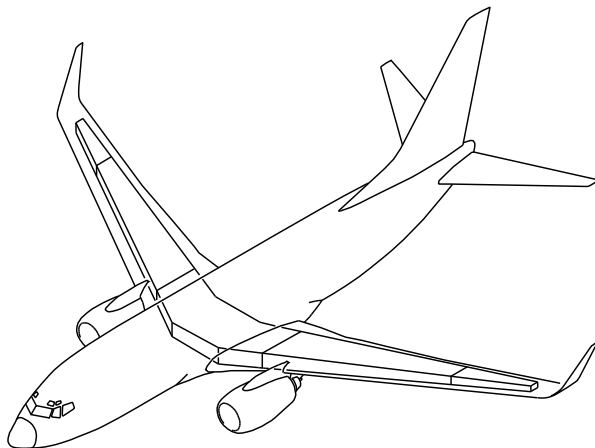

FUEL CONTROL PANEL


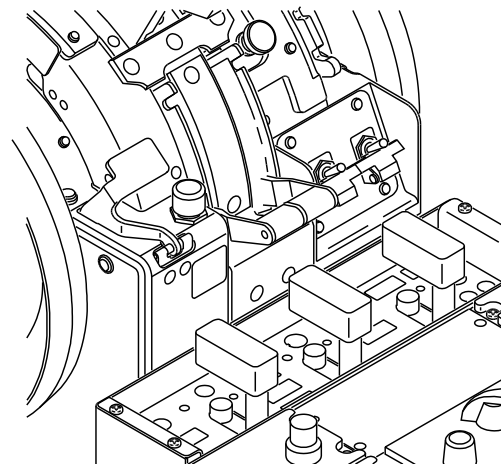


ENGINE START LEVERS


ENGINE FUEL FEED - INTRODUCTION

M84595 S0004626062_V1

ENGINE FUEL FEED - INTRODUCTION

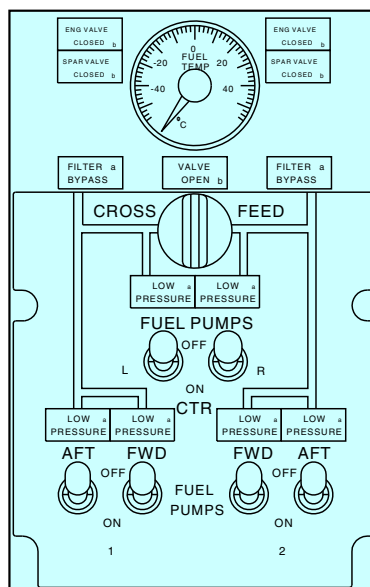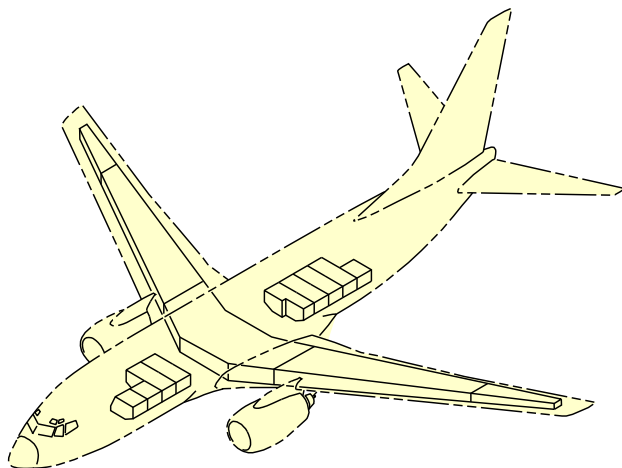

FUEL CONTROL PANEL


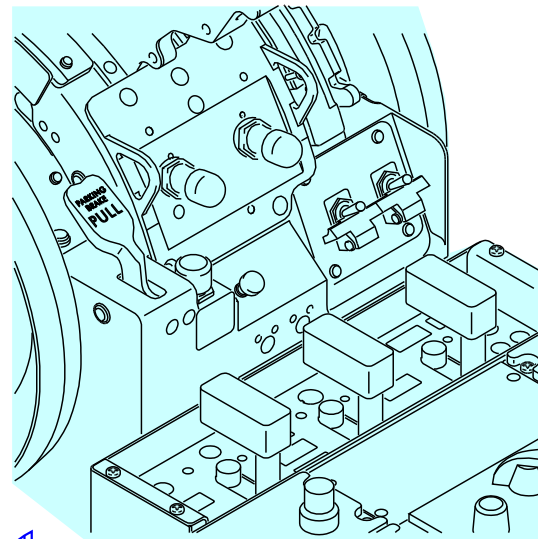


ENGINE START LEVERS


ENGINE FUEL FEED - INTRODUCTION

2339156 S0000532429_V2

ENGINE FUEL FEED - INTRODUCTION

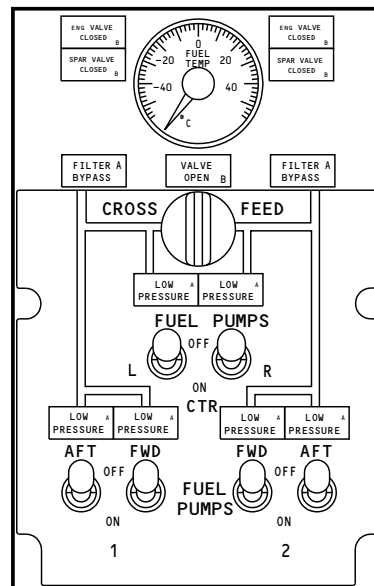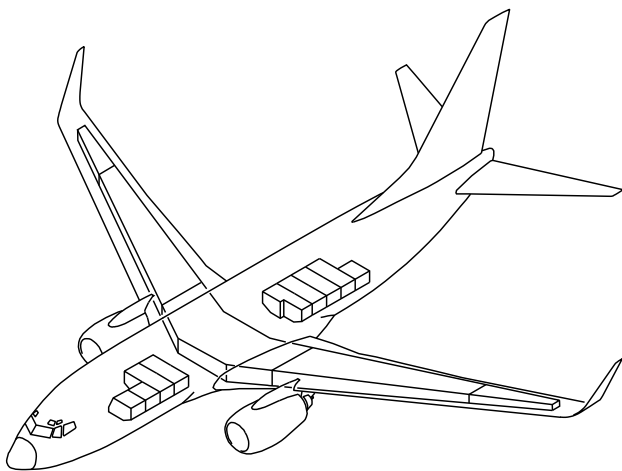

FUEL CONTROL PANEL


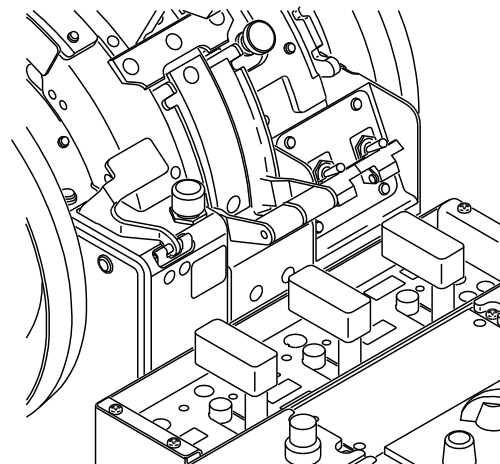


ENGINE START LEVERS


ENGINE FUEL FEED - INTRODUCTION

M84596 S0004626064_V1

ENGINE FUEL FEED - INTRODUCTION

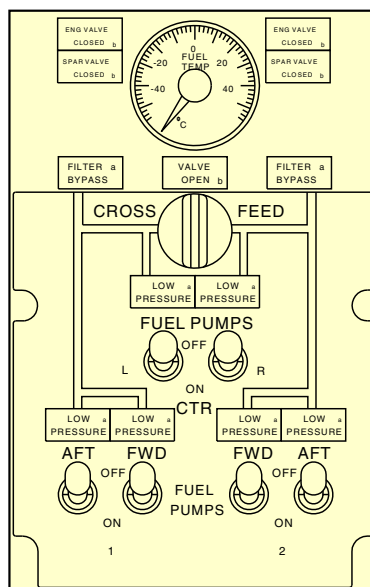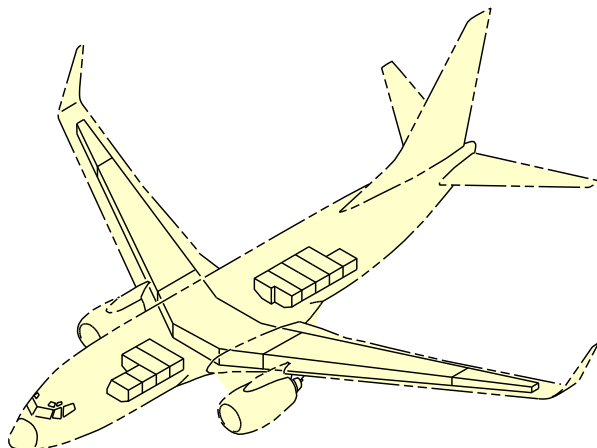

FUEL CONTROL PANEL

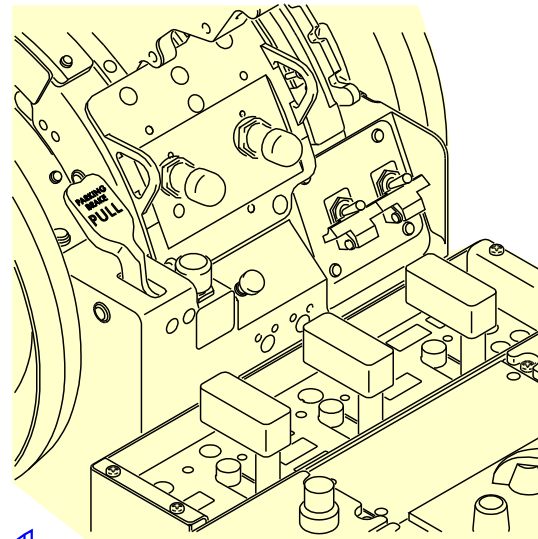

ENGINE START LEVERS

ENGINE FUEL FEED - INTRODUCTION

2339169 S0000532431_V2

28-22-00

EFFECTIVITY
SIA 716-999

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-22-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**ENGINE FUEL FEED - GENERAL DESCRIPTION****General**

The engine fuel feed system controls and supplies fuel to the engines. It uses these inputs:

- Fuel system panel (P5-2)
- Engine start levers
- Engine fire switches.

The engine fuel feed system uses these components to supply fuel to the engines:

- Center tank boost pumps
- Forward boost pumps
- Aft boost pumps
- Bypass valve
- Crossfeed valve
- Engine fuel spar valve.

Center Tank Boost Pump Control

A switch on the fuel system panel (P5-2) controls each center tank boost pump. The switches control electrical power to the pumps.

Center Tank Boost Pump Indication

A LOW PRESSURE light comes on when the center tank boost pump pressure is low and the center tank boost pump switch is in the ON position.

There is a 10 second delay after the fuel LOW PRESSURE light comes on, before the master caution light comes on.

Fuel Boost Pump

A switch on the fuel system panel (P5-2) controls each forward and aft boost pump for main tank No. 1 and main tank No. 2. The switches control power to the pumps.

Fuel Boost Pump Indication

A LOW PRESSURE light comes on when the fuel boost pump pressure is low or when the boost pump switch is in the OFF position.

Bypass Valve

A bypass valve supplies a secondary fuel flow path to the engines. The bypass valves operate automatically.

Engine Fuel Spar Valve

The engine fuel spar valves control fuel flow to the engines. The engine start levers and the engine fire switches control the engine fuel spar valves.

Fuel Spar Valve Battery

The engine fuel spar valve battery makes sure that the engine fuel feed system always has power to close the engine fuel spar valve.

Engine Fuel SPAR Valve Indication

A blue SPAR VALVE CLOSED light shows valve position.

Crossfeed Valve

The crossfeed valve permits a single fuel tank to supply fuel to both engines. A switch on the fuel system panel (P5-2) controls the crossfeed valve.

Crossfeed Valve Indication

A blue VALVE OPEN light shows valve position.

Water Scavenge Ejector Pumps

The water scavenge jet pumps remove water from the low points of each tank to prevent corrosion. The center tank, main tank No. 1, and main tank No. 2 boost pumps control the operation of the water scavenge ejector pumps.


28-22-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

ENGINE FUEL FEED - GENERAL DESCRIPTION

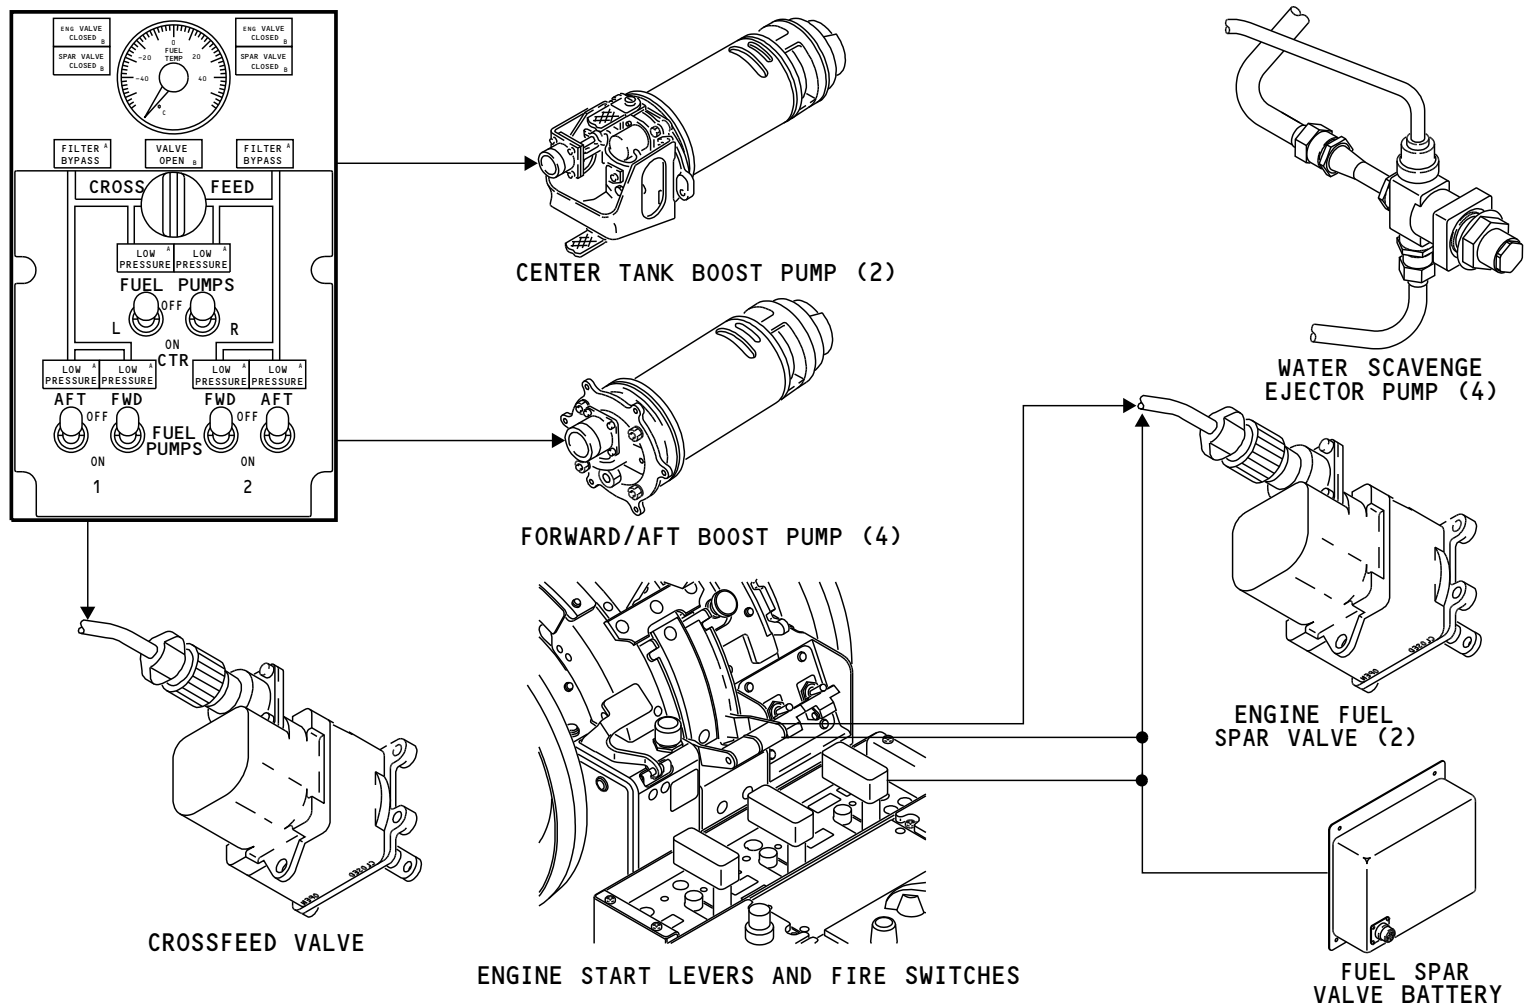

M84597 S0004626066_V1

ENGINE FUEL FEED - GENERAL DESCRIPTION


28-22-00

EFFECTIVITY
SIA 702-714

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

ENGINE FUEL FEED - GENERAL DESCRIPTION

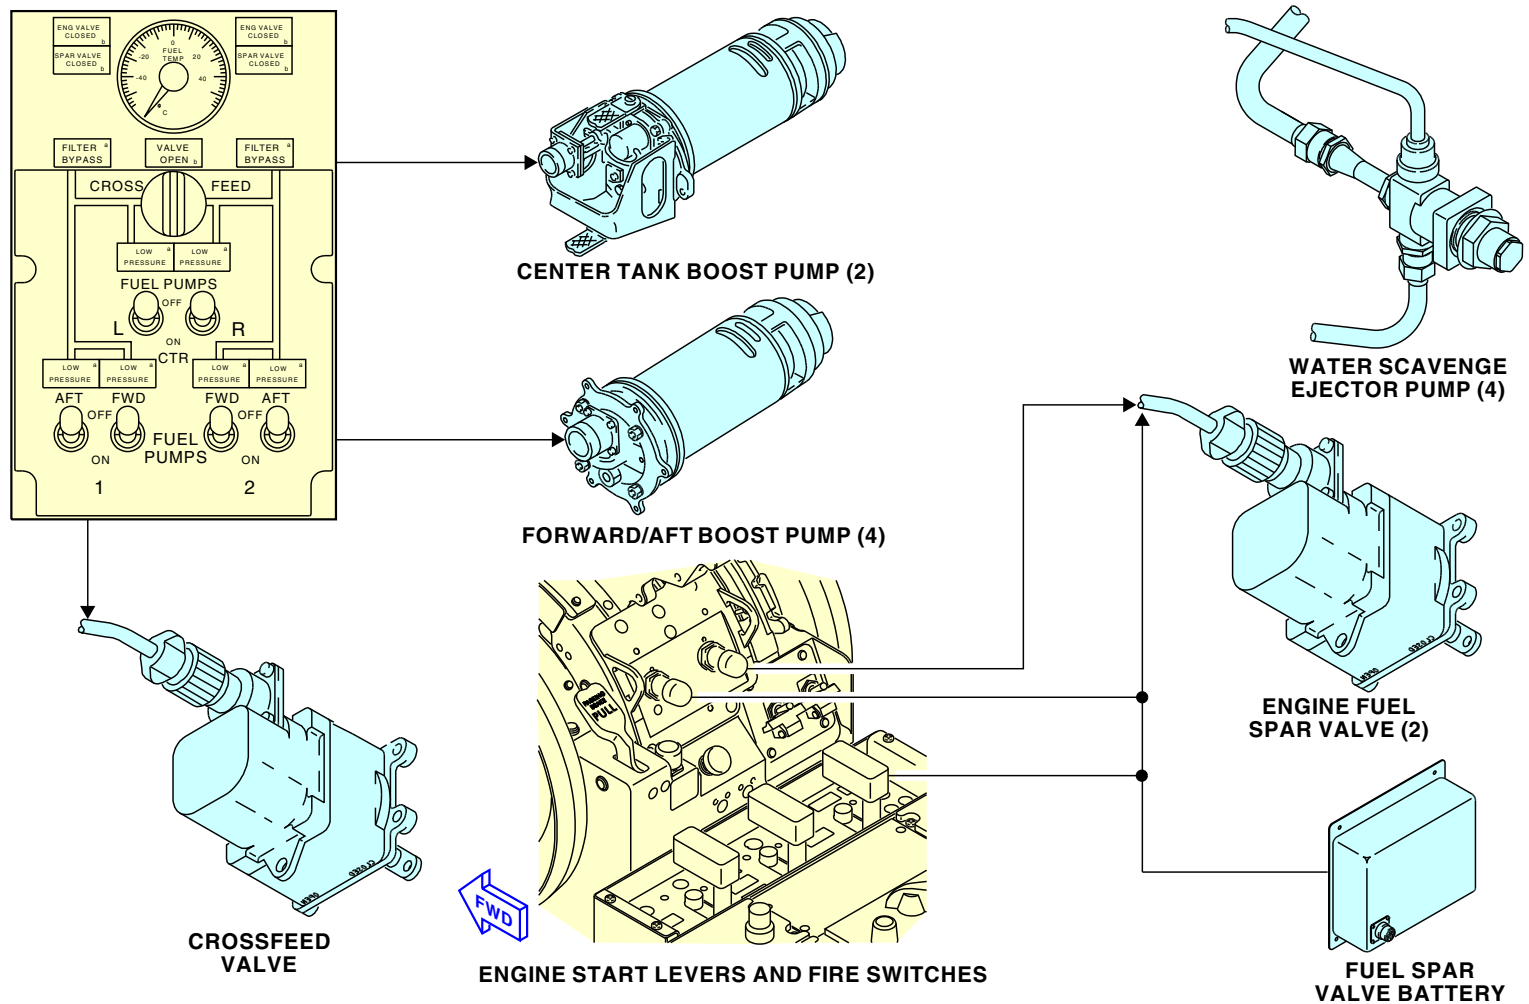

2339174 S0000532433_V2

ENGINE FUEL FEED - GENERAL DESCRIPTION

28-22-00



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-22-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**ENGINE FUEL FEED - COMPONENT LOCATION****General**

The engine fuel feed system has these components:

- Center tank boost pump (2)
- Forward and aft boost pump (4)
- Crossfeed valve
- Engine fuel spar valve (2)
- Bypass valve (2)
- Water scavenge ejector pump (4).

Center Tank Boost Pumps

There are two center tank boost pumps in the center tank. They are installed on the rear spar. Access to the center tank boost pumps is through the wheel wells.

Forward And Aft Boost Pumps

There are forward and aft boost pumps for the main tanks No. 1 and No. 2 installed in the center tank. The forward boost pumps are on the front spar. The aft boost pumps are on the rear spar. Access to the forward boost pumps is through extended krueger flaps. Access to the aft boost pumps is through the wheel wells.

Crossfeed Valve

The crossfeed valve is on the right side of the center tank on the rear spar. Access to the crossfeed valve is through the right wheel well.

Engine Fuel Spar Valves

There is one engine fuel spar valve for each engine. The engine fuel spar valves are on the front spar outboard of each strut.

Bypass Valves

There is one bypass valve in main tank No. 1 and No. 2. The bypass valve connects to the fuel feed manifold.

Water Scavenge Ejector Pumps

There is one water scavenge ejector pump in main tank No. 1 and No. 2. There are two water scavenge ejector pumps in the center tank. All of the water scavenge ejector pumps are on the rear spar.

Fuel Shutoff Valve Battery

The fuel shutoff valve battery is in the P6 panel.


28-22-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

ENGINE FUEL FEED - COMPONENT LOCATION

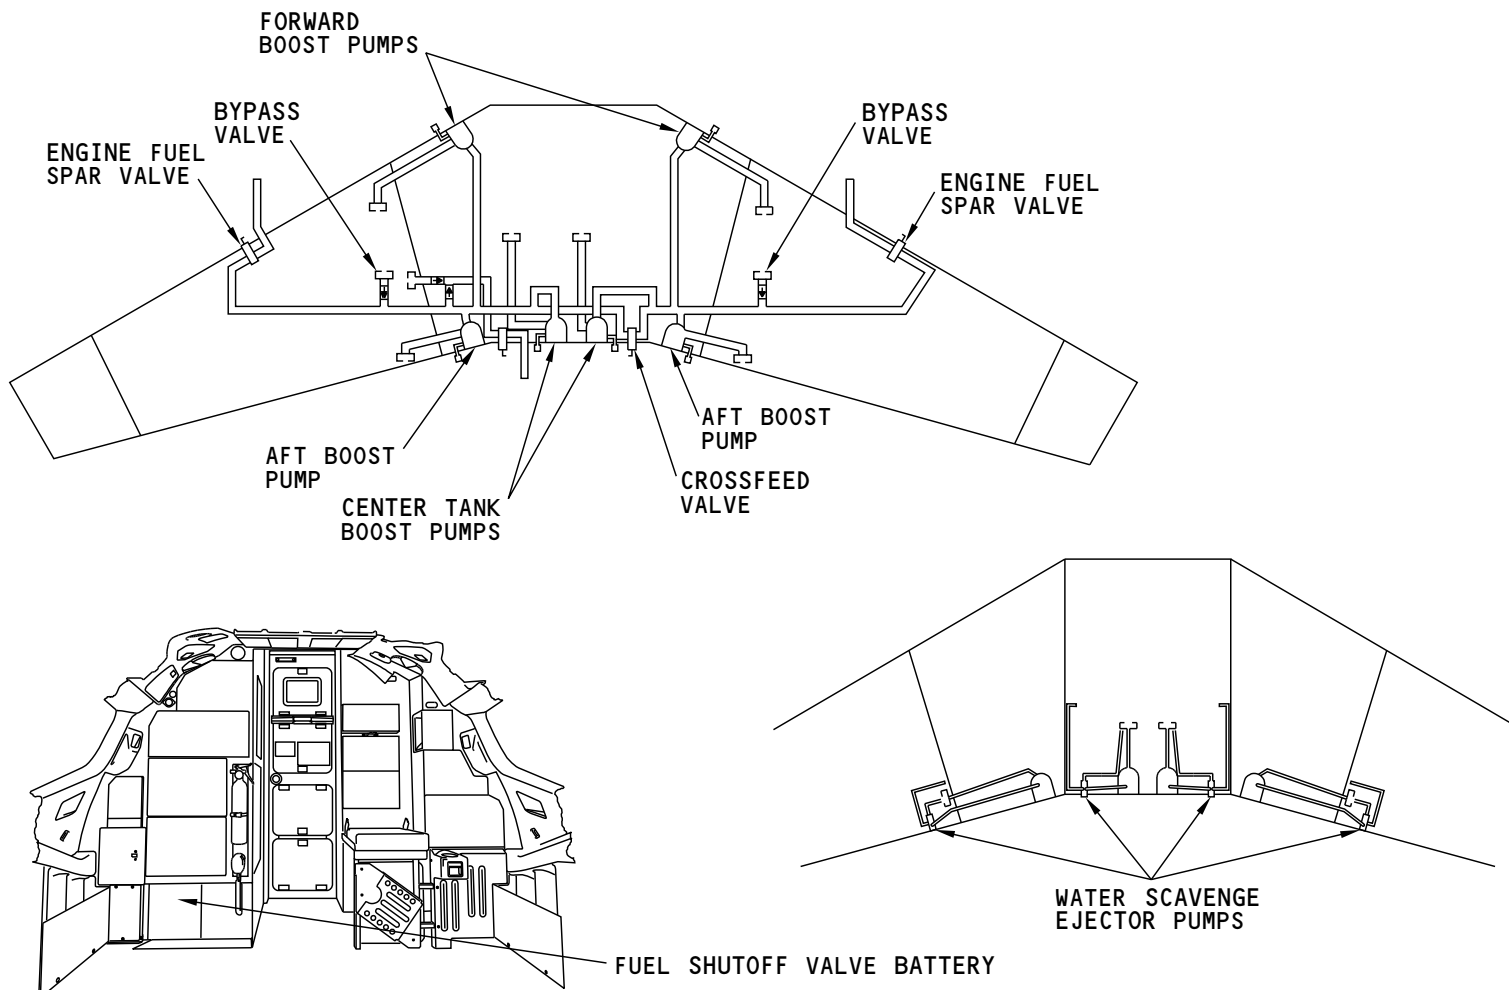

M84598 S0004626068_V1

ENGINE FUEL FEED - COMPONENT LOCATION

28-22-00-002

SIA ALL

EFFECTIVITY

28-22-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**ENGINE FUEL FEED - CENTER TANK BOOST PUMP****General**

The center tank boost pumps supply fuel from the center tank to the engine fuel feed manifold.

The center tank boost pump supplies fuel at a minimum pressure of 23 psi and a minimum flow rate of 20,000 pph (9,071 kgph).

Each pump assembly has a motor and a housing.

Location

The center tank boost pumps are on the rear spar in the wheel well.

The pressure switch for the right and left center tank pump is on the rear spar. Access to the left center tank boost pump pressure switch is through the left wheel well. Access to the right center tank boost pump pressure switch is through the right wheel well.

Center Tank Boost Pump Housing

The housing contains these components:

- Discharge check valve
- Removal check valve
- Vapor discharge check valve.

The discharge check valve is a flapper type valve. The discharge check valve prevents fuel flow from the engine feed manifold through the pump.

The removal check valve is a poppet type valve. The removal check valve closes when you remove the motor. This allows motor removal without defueling the center tank.

The vapor discharge check valve prevents a reverse flow of fuel, from the tank, through the pump.

Center Tank Boost Pump Motor


The motor has the impeller and uses 3-phase, 115v ac power. It is inside the housing.

Pressure Switch

The low pressure switch sends a low center tank boost pump pressure signal to the LOW PRESSURE light (P5).

EFFECTIVITY	
SIA ALL	

ENGINE FUEL FEED - CENTER TANK BOOST PUMP

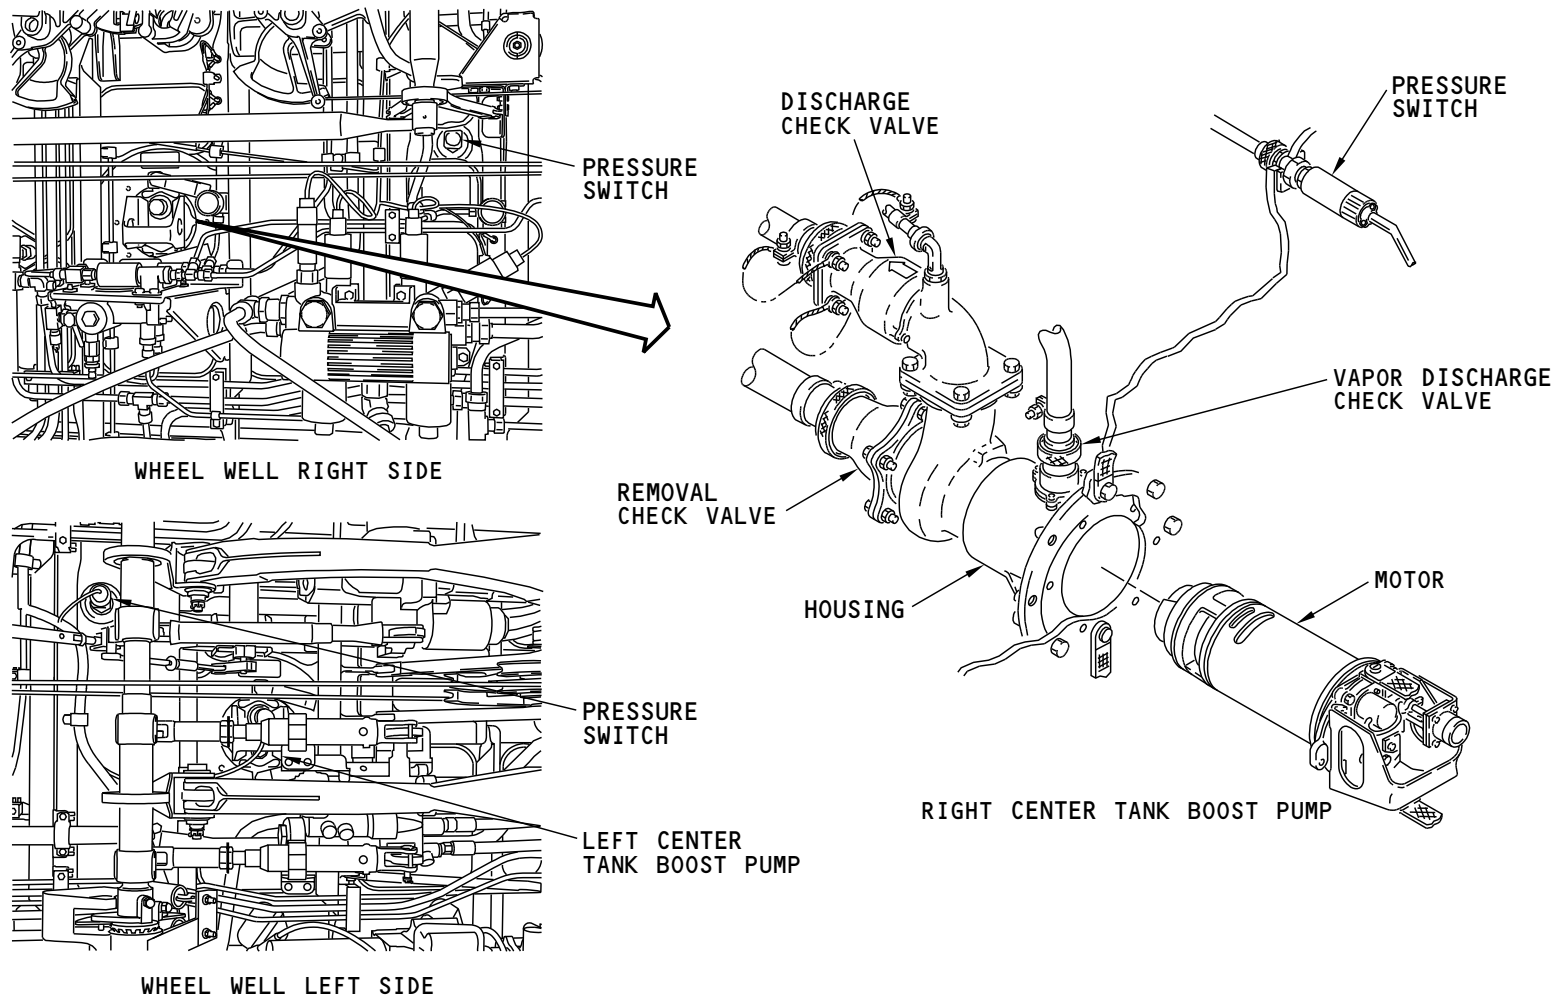

M84599 S0004626070_V1

ENGINE FUEL FEED - CENTER TANK BOOST PUMP

28-22-00-003

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-22-00



ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - CENTER TANK BOOST PUMP

General

This page shows control of the left center tank boost pump. Control of the right center tank boost pump is almost the same.

Left Center Tank Boost Pump Control

The center tank left boost pump switch controls the center tank left boost pump relay. The center tank left boost pump relay controls electrical power to the left center tank boost pump.

With the switch in the on position, 115v ac power goes to the relay. With the relay energized, power goes from the 115v ac transfer bus to the left center tank boost pump.

With the switch in the off position, the relay no longer receives 115v ac power. With the relay not energized, the center tank boost pump no longer receives power.

Left Center Tank Boost Pump Auto Shutoff

The left center tank boost pump has an auto shutoff function.

The auto shutoff function will de-energize the center tank left boost pump relay after a time delay of 15 seconds when low boost pump pressure is detected. With the relay not energized, the center tank boost pump no longer receives power.

Fuel Test Panel, P61-8

The auto shutoff function can be tested with the left auto shutoff test switch, S1, on the fuel test panel, P61-8.

The fuel test panel, P61-8, is found in the rear of the flight compartment on the right side. The fuel test panel, P61-8, is not used by the flight crew.

Pressure Indication

A LOW PRESSURE light comes on when the center tank left boost pump switch is in the on position and the left center tank boost pump pressure is 18 psig or less.

Ground Fault Protection

The center tank left boost pump control relay contains a ground fault protection circuit. It removes power to the left center tank boost pump if there is a short circuit or a phase anomaly in the ac power supply.

28-22-00-004


EFFECTIVITY	
SIA ALL	

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-22-00

ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - CENTER TANK BOOST PUMP

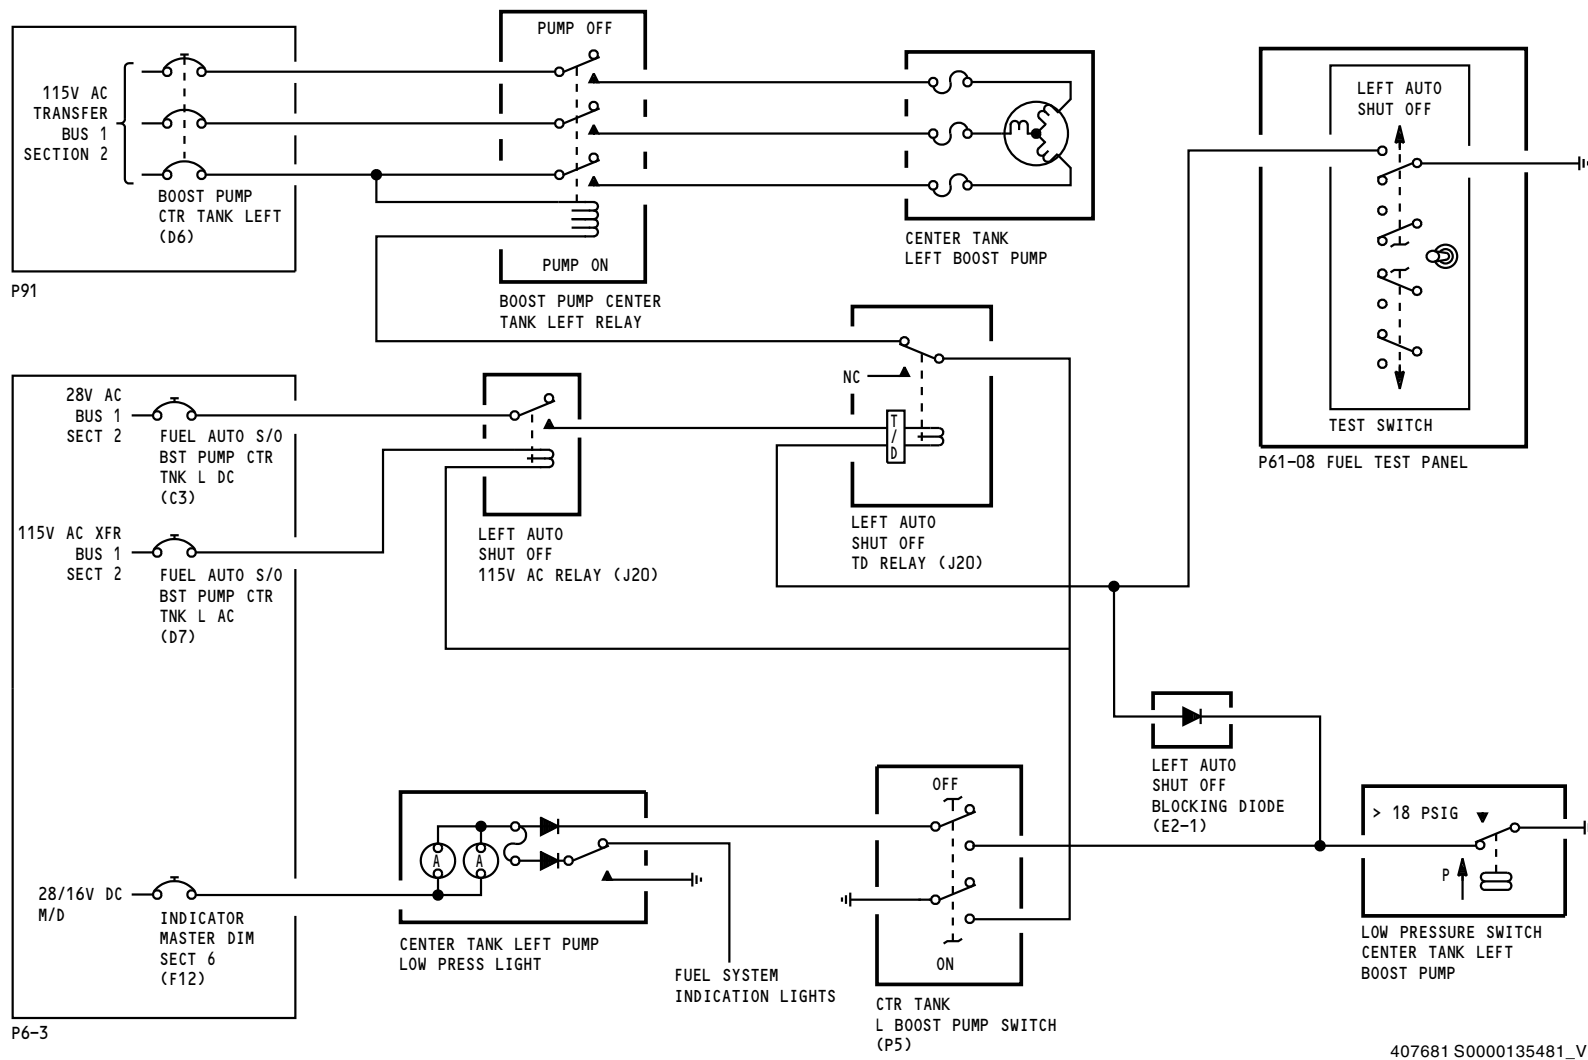

ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - CENTER TANK BOOST PUMP

28-22-00

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**ENGINE FUEL FEED - MAIN TANK 1 FORWARD AND AFT BOOST PUMPS****General**

The boost pumps supply fuel from main tank 1 to the engine feed manifold.

The boost pumps supply fuel at a minimum pressure of 10 psi at a flow rate of 20,000 pph (9,071 kgph).

Each of the boost pumps in main tank 1 and main tank 2 are interchangeable.

Location

The forward boost pump is on the left wing front spar. Access to the left forward boost pump is through a deployed leading edge flap. The aft boost pump is on the left wing rear spar. Access to the aft boost pump is through the left wheel well.

The pressure switch for the forward boost pump is on the front spar. Access to this pressure switch is through an access panel on the top of the left wing. The pressure switch for the aft boost pump is on the rear spar. Access to this pressure switch is through the left wheel well.

Boost Pump Housing

The housing contains these components:

- Discharge check valve
- Removal check valve
- Vapor discharge check valve.

The discharge check valve is a flapper type valve. The discharge check valve prevents fuel flow from the engine feed manifold through the pump.

The removal check valve is a poppet type valve. The removal check valve closes when you remove the motor. This permits motor removal without defueling tank 1.

The vapor discharge check valve prevents a reverse flow of fuel, from the tank, through the pump.

Boost Pump Motor


The motor has the impeller and uses three-phase, 115v ac power. It is inside the housing.

Pressure Switch

The low pressure switch sends a low boost pump pressure signal to the LOW PRESSURE light (P5).

EFFECTIVITY	
SIA ALL	

ENGINE FUEL FEED - MAIN TANK 1 FORWARD AND AFT BOOST PUMPS

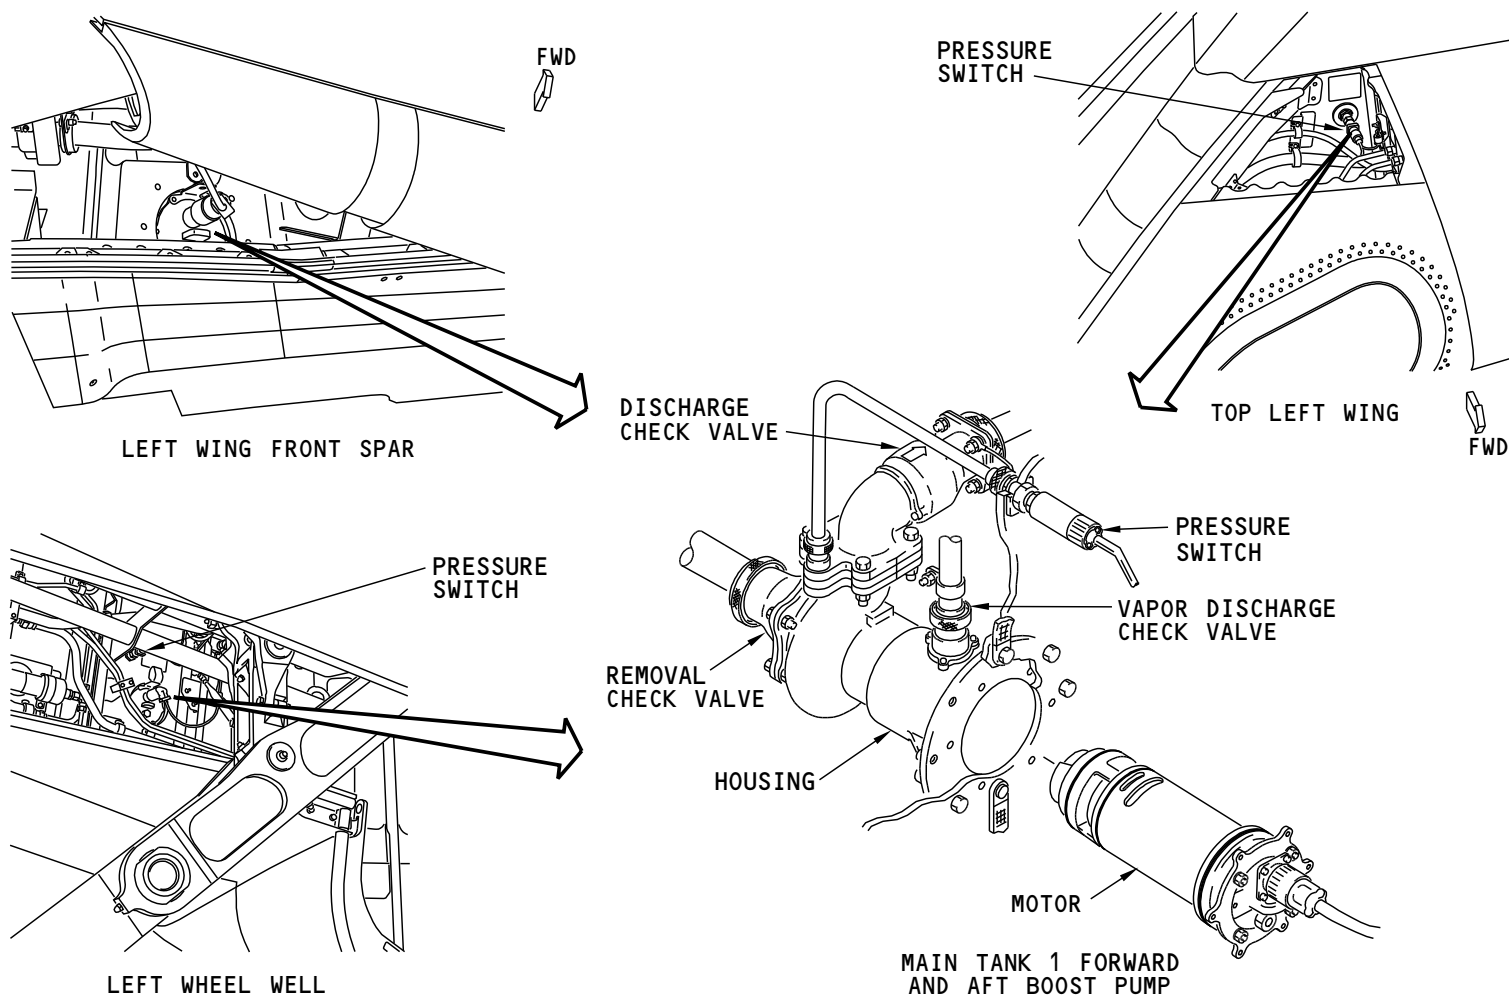

M84601 S0004626074_V1

ENGINE FUEL FEED - MAIN TANK 1 FORWARD AND AFT BOOST PUMPS

28-22-00-005

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-22-00

**ENGINE FUEL FEED - MAIN TANK NO. 2 FORWARD AND AFT BOOST PUMPS****General**

The boost pumps supply fuel from main tank 2 to the engine feed manifold.

The boost pumps supply fuel at a minimum pressure of 10 psi and a minimum flow rate of 20,000 pph (9,071 kgph).

Each of the boost pumps in main tank 2 and main tank 1 are interchangeable.

Location

The forward boost pump is on the right wing front spar. Access to the right boost pump is through a deployed leading edge flap. The aft boost pump is on the rear spar. Access to the aft boost pump is through the right wheel well.

The pressure switch for the forward boost pump is on the front spar. Access to this pressure switch is through an access panel on the top of the right wing. The pressure switch for the aft boost pump is on the rear spar. Access to this pressure switch is through the right wheel well.

Boost Pump Housing

The housing contains these components:

- Discharge check valve
- Removal check valve
- Vapor discharge check valve.

The discharge check valve is a flapper type valve. The discharge check valve prevents fuel flow from the engine feed manifold through the pump.

The removal check valve is a poppet type valve. The removal check valve closes when you remove the motor. This allows motor removal without defueling main tank 2.

The vapor discharge check valve prevents a reverse flow of fuel, from the tank, through the pump.


Boost Pump Motor

The motor has the impeller and uses 115v ac power. It is inside the housing.

Pressure Switch

The low pressure switch sends a low boost pump pressure signal to the LOW PRESSURE light (P5).

ENGINE FUEL FEED - MAIN TANK NO. 2 FORWARD AND AFT BOOST PUMPS

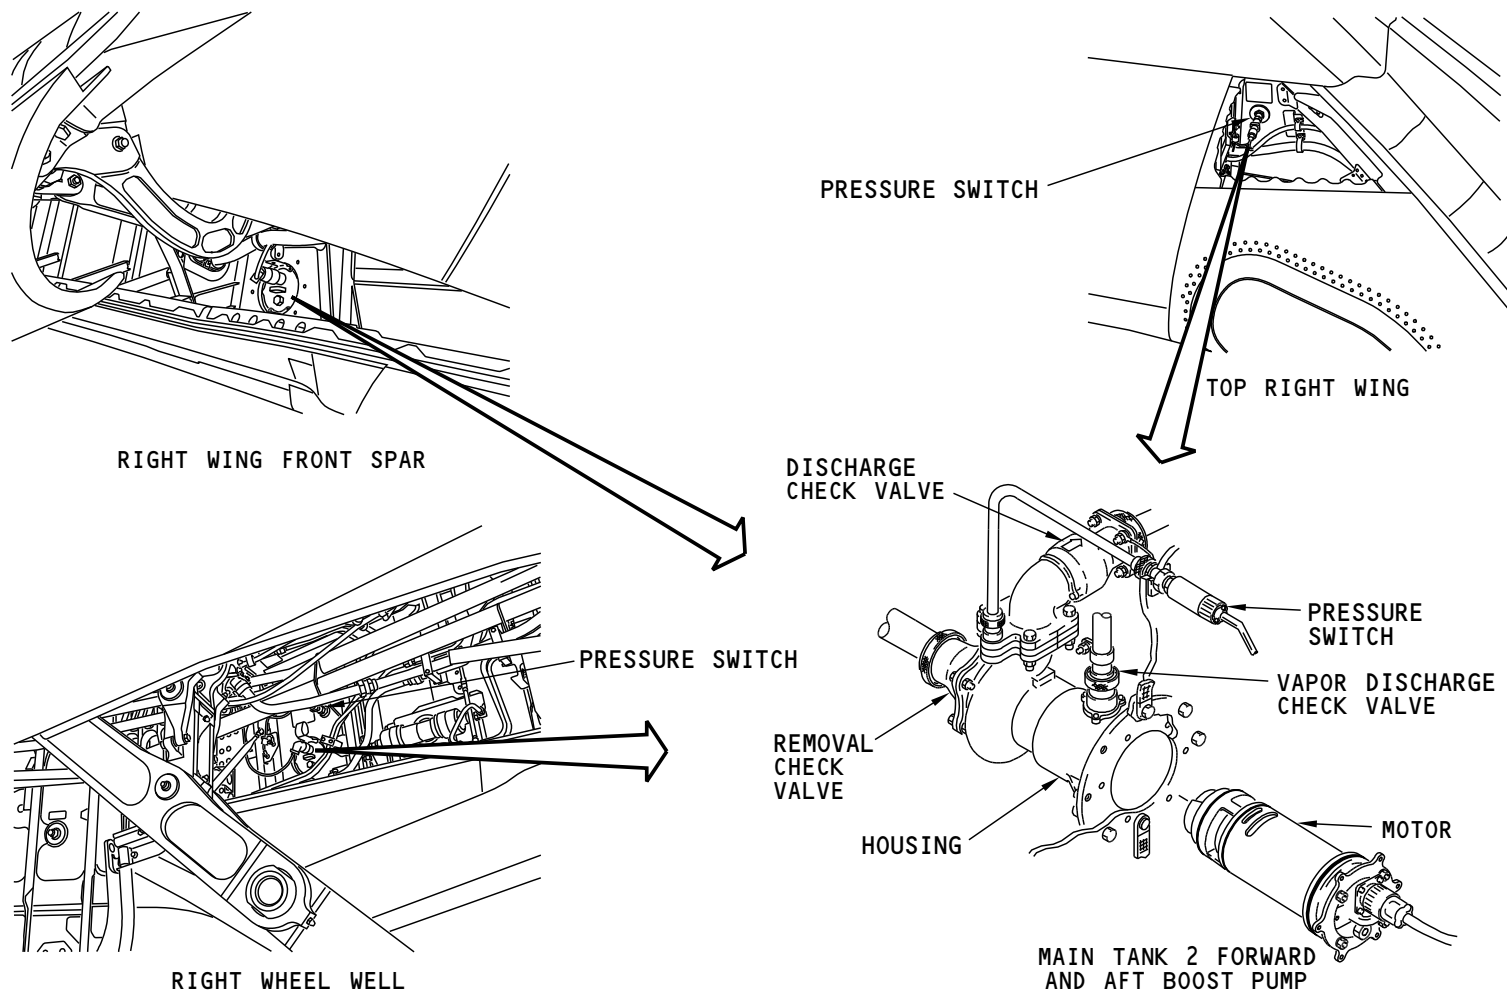

M84602 S0004626076_V1

ENGINE FUEL FEED - MAIN TANK NO. 2 FORWARD AND AFT BOOST PUMPS

28-22-00-006

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-22-00

**ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - FORWARD AND AFT BOOST PUMP****General**

This page shows control of the left forward boost pump. Control of the left aft, right forward, and right aft boost pump is almost the same.

Left Forward Boost Pump Control

The tank 1 forward boost pump switch controls the tank 1 forward boost pump relay. The tank 1 forward boost pump relay controls power to the left forward boost pump.

With the switch in the ON position, 115v ac power goes to the relay. With the relay energized, power goes from the 115v ac transfer bus to the left forward boost pump.

With the switch in the OFF position, the relay no longer receives 115v ac power. With the relay not energized, the left forward boost pump no longer receives power.

Pressure Indication

A LOW PRESSURE light comes on when the tank No. 1 forward boost pump pressure is 4 psig or less.

Ground Fault Protection


The tank 1 forward boost pump control relay contains a ground fault protection circuit. It removes power to the tank 1 forward boost pump if there is a short circuit or a phase anomaly in the ac power supply.

28-22-00

EFFECTIVITY	
SIA ALL	

D633A101-SIA

ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - FORWARD AND AFT BOOST PUMP

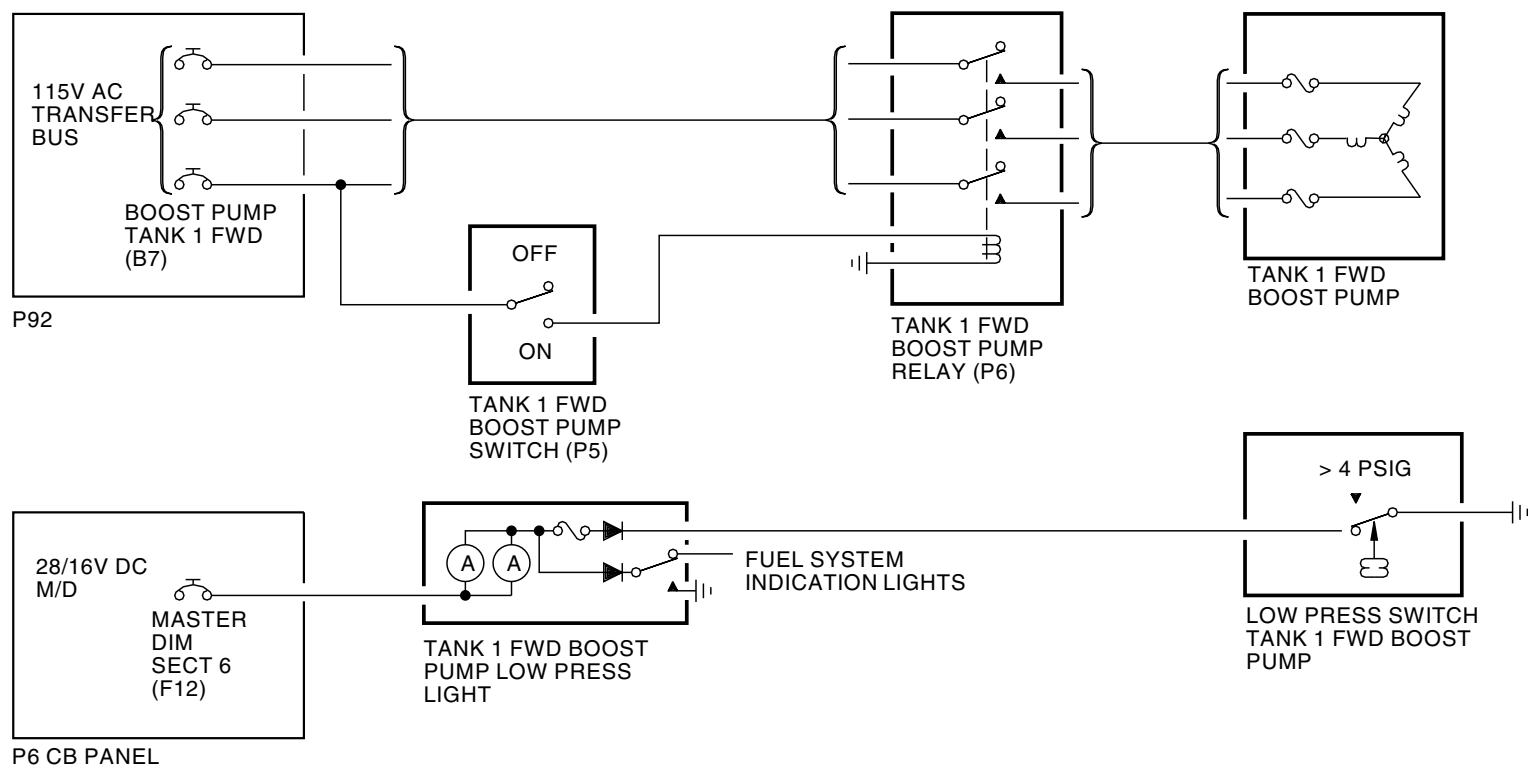

NOTE: MAIN TANK NO. 1 FORWARD BOOST PUMP IS SHOWN.
MAIN TANK NO. 1 AFT, MAIN TANK NO. 2 FORWARD, AND
MAIN TANK NO. 2 AFT BOOST PUMP IS SIMILAR.

M84603 S0004626078_V3

ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - FORWARD AND AFT BOOST PUMP

28-22-00-007

SIA ALL

EFFECTIVITY

28-22-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**ENGINE FUEL FEED - FUEL CROSSFEED VALVE****General**

The crossfeed valve lets fuel flow between the left and right engine fuel feed manifolds. With the connection of the two engine fuel feed manifolds, one fuel tank supplies fuel to both engines.

The fuel crossfeed valve actuator is interchangeable with the engine fuel spar valve actuator.

Location

The fuel crossfeed valve is on the right wing rear spar. Access is through the right wheel well.

Motor Actuated Valve

The motor actuated valve has these parts:

- Valve body
- Adapter and shaft
- Actuator.

Valve Body

The valve body connects to the left and right engine fuel feed manifold. The valve body has an operating shaft and a butterfly valve (not shown). There are no hard stops for the butterfly valve. The alignment marks show valve position.

Adapter and Shaft

The adapter and shaft attaches between the rear spar and the operating shaft. The adapter has a mount plate and an actuator adapter plate.

The mount plate attaches to the rear spar. The actuator adapter plate attaches to the mount plate with adjustment screws. You loosen the adjustment screws to rotate the actuator adapter plate. You turn the actuator adapter plate to align the butterfly valve with the actuator.

Actuator


The actuator is a 28v dc motor. It has a manual override lever that permits valve operation without electrical power. The lever aligns with valve position indicators on the adapter. This shows valve position.

28-22-00

EFFECTIVITY	
SIA ALL	

D633A101-SIA

ENGINE FUEL FEED - FUEL CROSSFEED VALVE

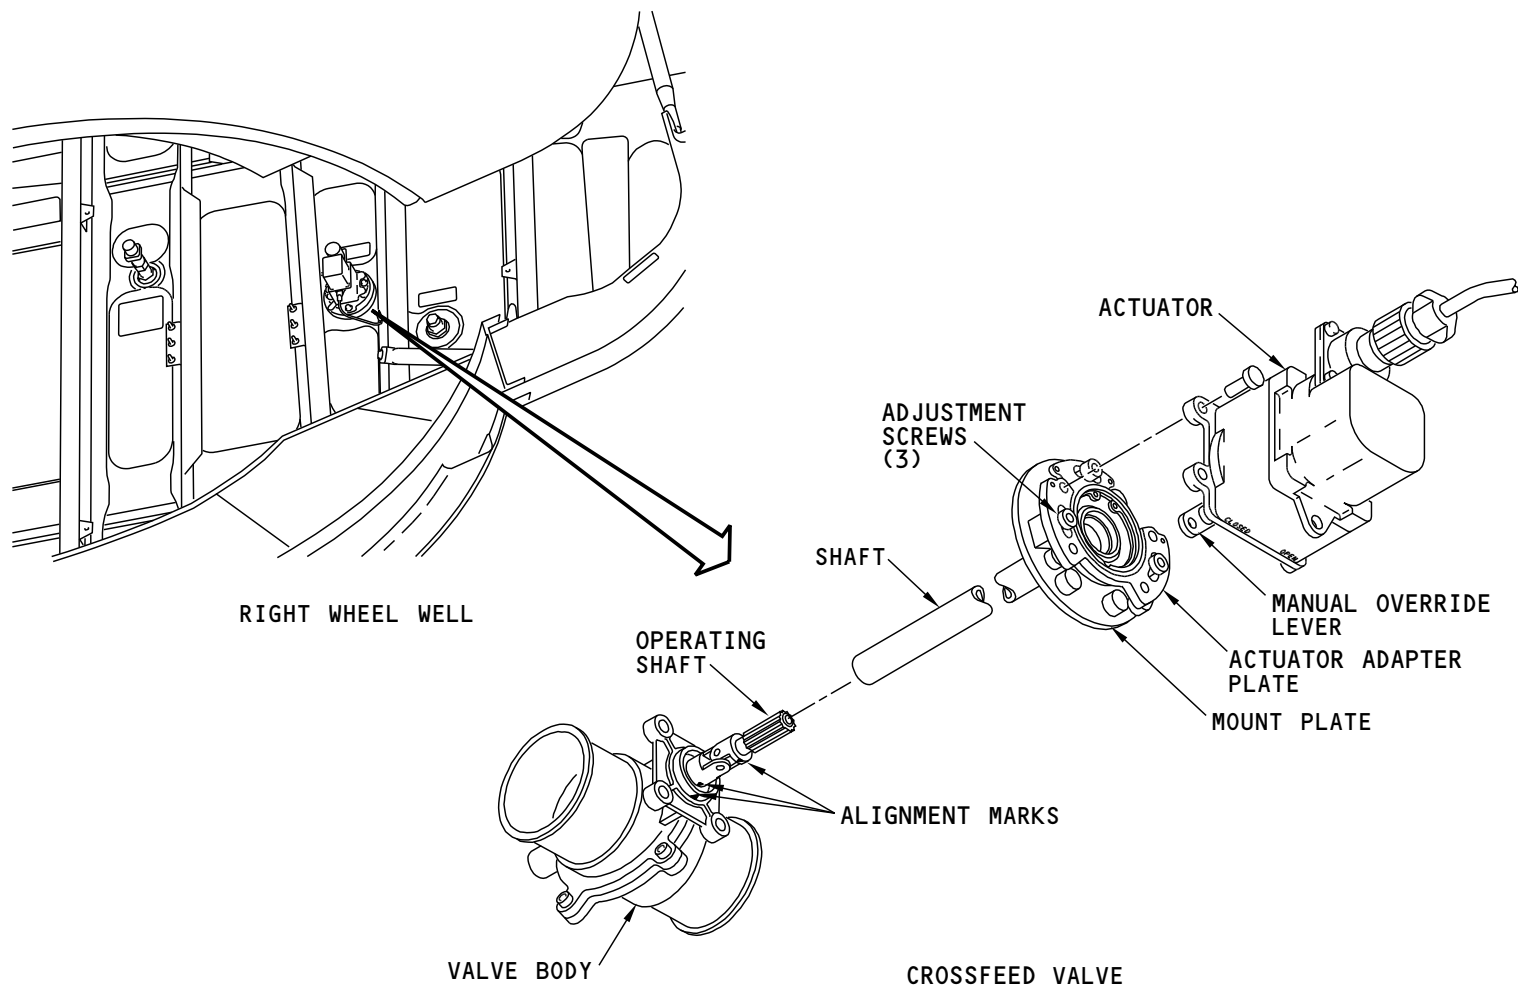

M84604 S0004626080_V1

ENGINE FUEL FEED - FUEL CROSSFEED VALVE

28-22-00



ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - FUEL CROSSFEED VALVE

General

The fuel crossfeed valve switch controls the crossfeed valve. When you move the switch to the open or closed position, 28v dc power goes through a switch assembly to the actuator. The actuator then moves the crossfeed valve to the applicable position.

The printed circuit card assembly controls the operation of the crossfeed valve open light. The printed circuit assembly receives fuel crossfeed valve position and fuel crossfeed valve switch position information.

When the fuel crossfeed valve is closed, the crossfeed valve open light is off. When the fuel crossfeed valve position and fuel crossfeed valve switch position disagree, the crossfeed valve open light is on bright. When the fuel crossfeed valve is open, the crossfeed valve open light is on dim.

28-22-00-009


EFFECTIVITY	
SIA ALL	

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-22-00

ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - FUEL CROSSFEED VALVE

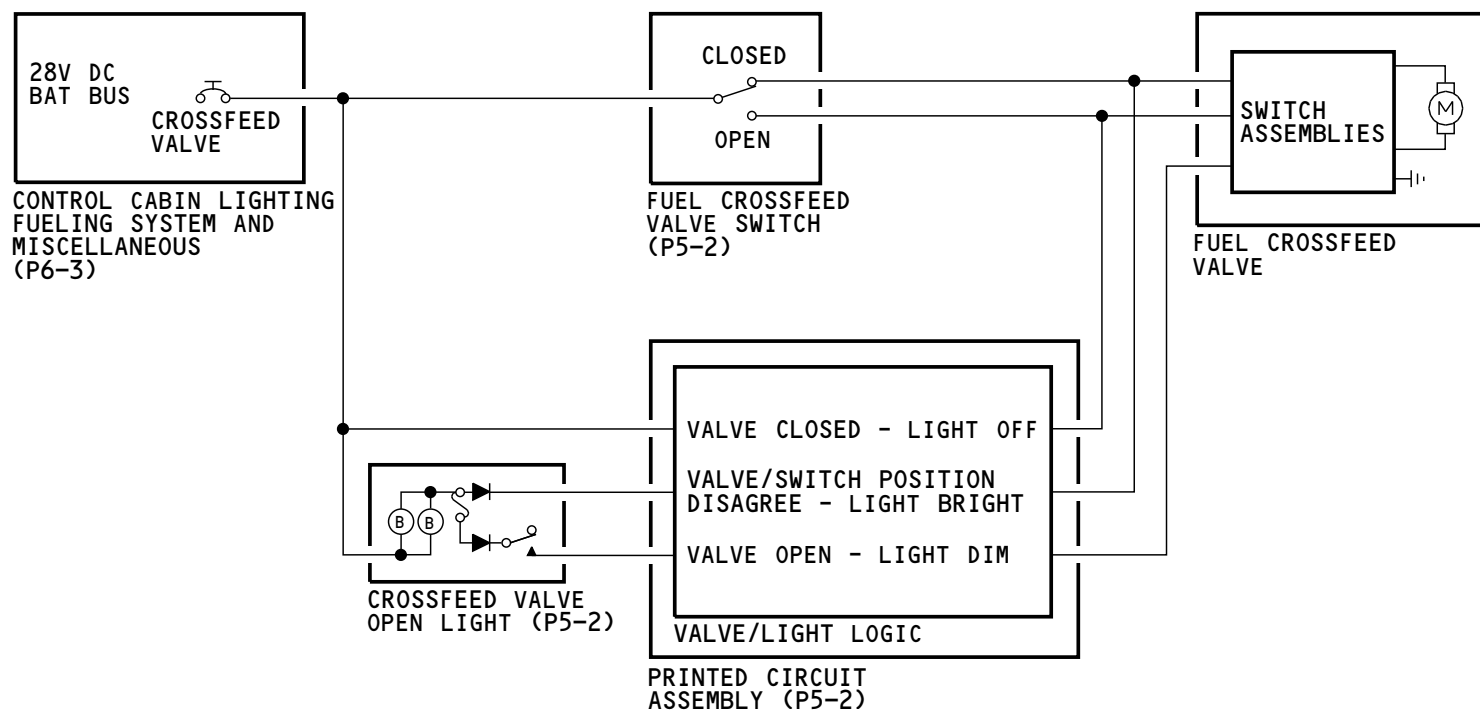

M84605 S0004626082_V1

ENGINE FUEL FEED - FUNCTIONAL DESCRIPTION - FUEL CROSSFEED VALVE

28-22-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**ENGINE FUEL FEED - ENGINE FUEL SPAR VALVE****General**

The fuel spar valve controls fuel flow from the engine fuel feed manifold to the engine fuel supply line.

Location

The left fuel spar valve is on the left wing front spar outboard of the engine strut. Access is through an access panel on the left wing leading edge.

The right fuel spar valve is on the right wing front spar outboard of the engine strut. Access is through an access panel on the right wing leading edge.

Motor Actuated Valve

The motor actuated valve has these parts:

- Valve body
- Adapter and shaft
- Actuator.

Valve Body

The valve body connects between the engine fuel feed manifold and the engine fuel supply line. The valve body has a shaft and a butterfly valve (not shown). The alignment marks show valve position.

Adapter and Shaft

The adapter and shaft attaches between the front spar and the operating shaft. The adapter has a mount plate and an actuator adapter plate.


The mount plate attaches to the front spar. The actuator adapter plate attaches to the mount plate with adjustment screws. You loosen the adjustment screws to rotate the actuator adapter plate. You turn the actuator adapter plate to align the butterfly valve with the actuator.

Actuator

The actuator is a 28v dc motor. It has a manual override lever that permits valve operation without electrical power. The lever aligns with valve position indicators on the adapter. This shows valve position.

The fuel spar valve actuator is interchangeable with the crossfeed valve actuator.

ENGINE FUEL FEED - ENGINE FUEL SPAR VALVE

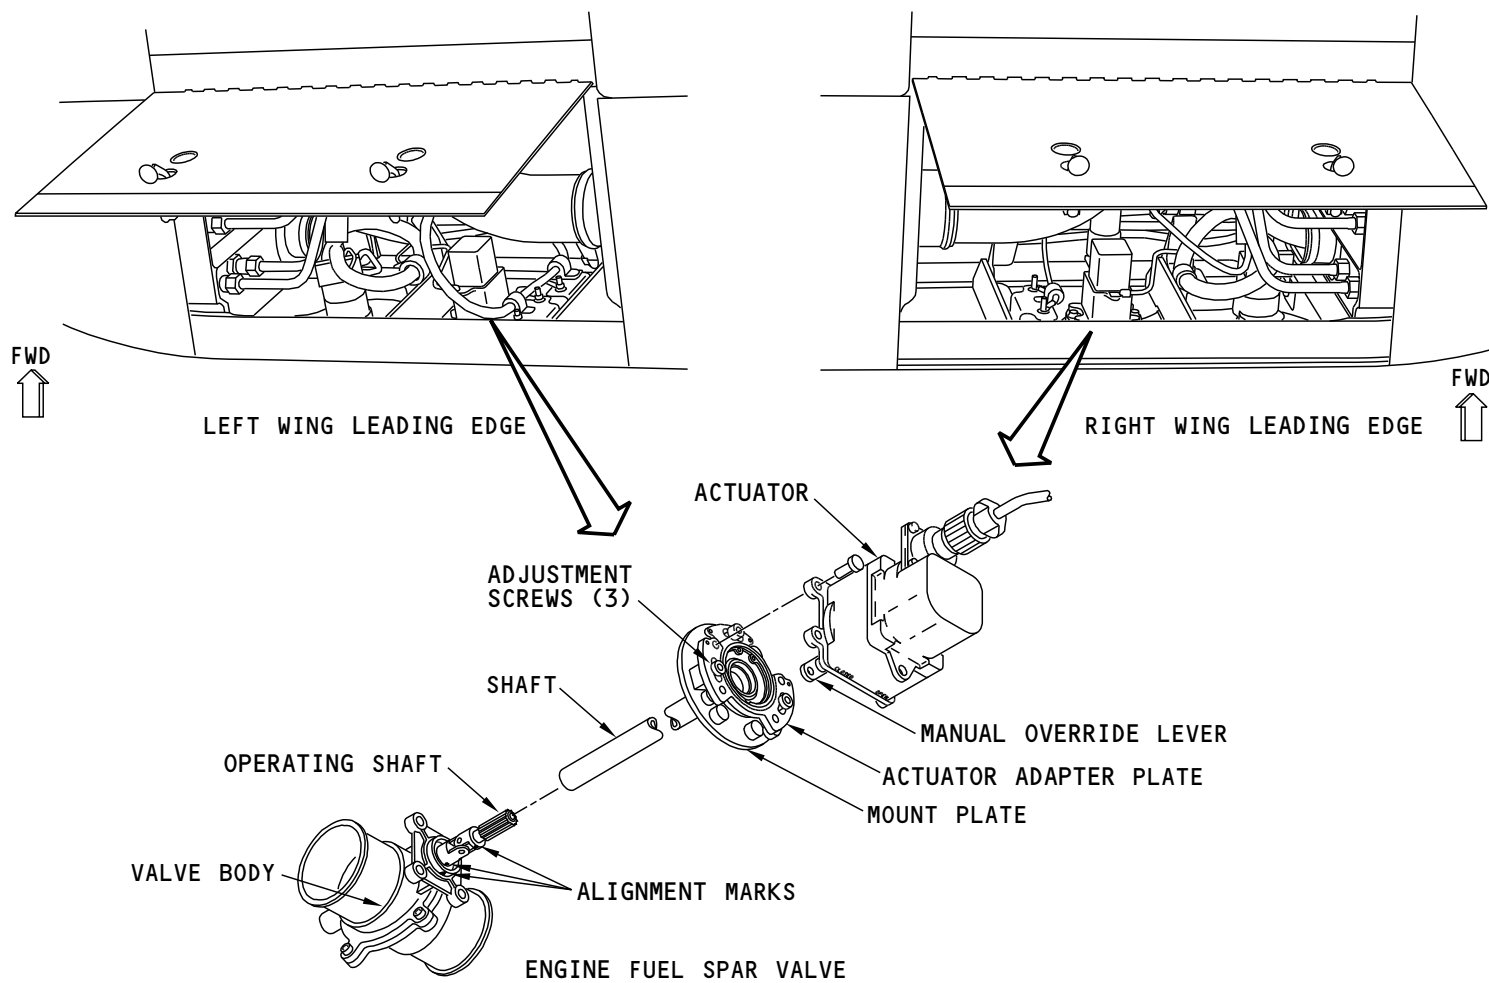

M84606 S0004626084_V1

ENGINE FUEL FEED - ENGINE FUEL SPAR VALVE

28-22-00

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**ENGINE FUEL FEED - ENGINE FUEL SPAR VALVE OPERATION****General**

The operation of the left engine fuel spar valve is shown. The operation of the right engine fuel spar valve is almost the same.


The engine start lever controls the engine fuel spar valve. When the lever is set to the IDLE or CUTOFF position, 28v dc power goes through a switch assembly to the actuator. The actuator then moves the engine fuel spar valve to the correct position.

When the fuel spar valve is closed, the fuel valve closed light is on dim. When the fuel spar valve position and engine start lever position disagree, the fuel spar valve closed light is on bright. When the fuel spar valve is open, the fuel spar valve closed light is OFF.

The fuel shutoff valve battery makes sure that the fuel system always has power to close the engine fuel spar valve.

EFFECTIVITY	
SIA ALL	

ENGINE FUEL FEED - ENGINE FUEL SPAR VALVE OPERATION

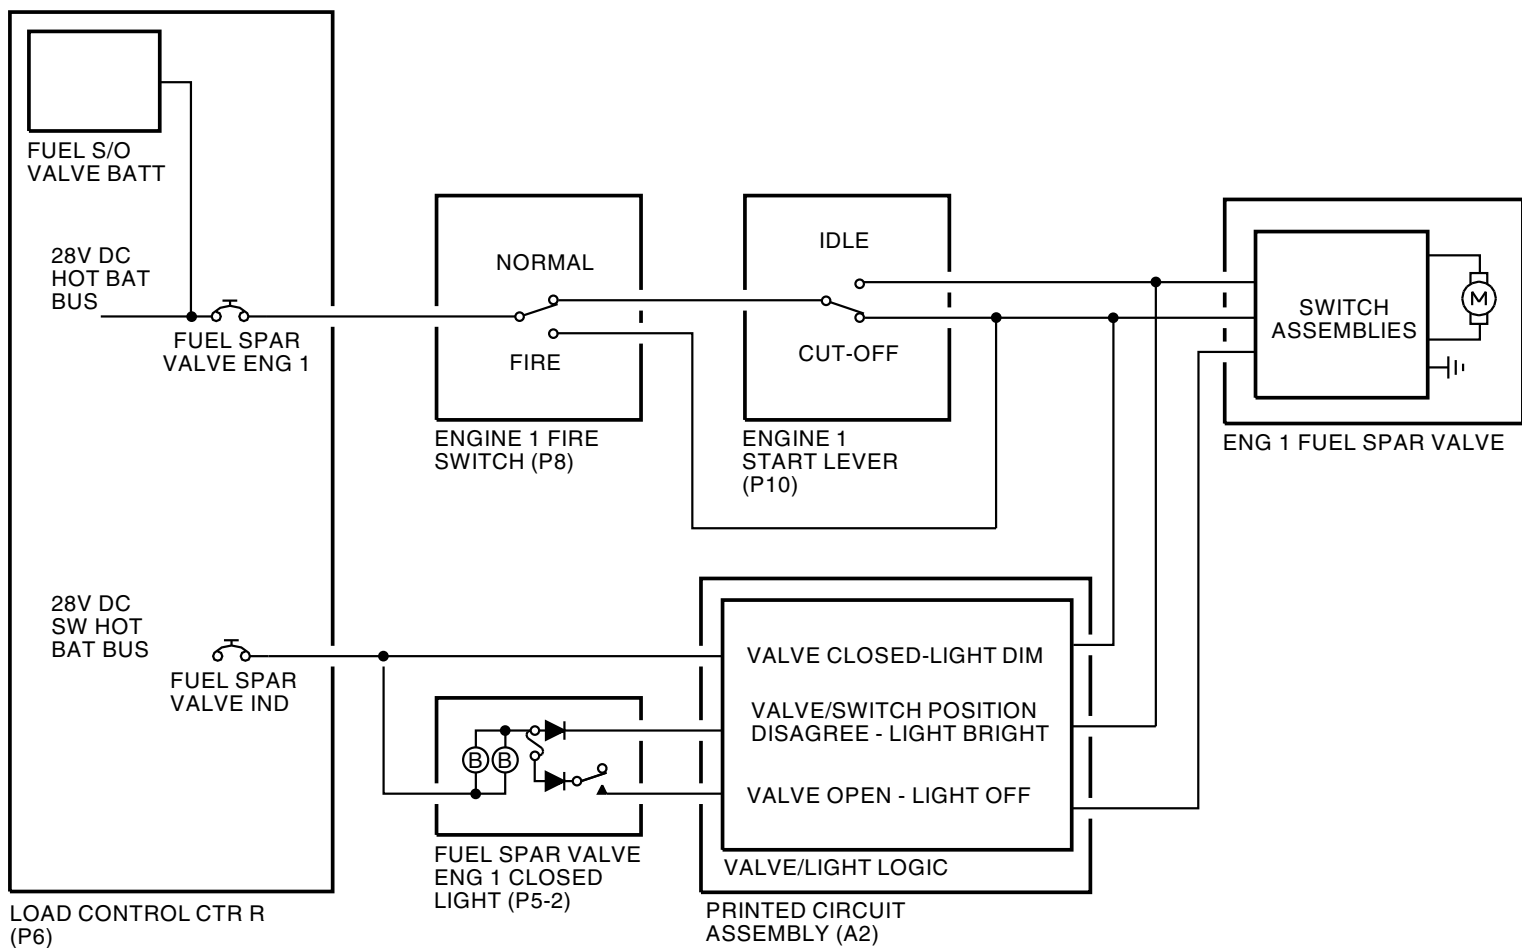

2339224 S0000532434_V4

ENGINE FUEL FEED - ENGINE FUEL SPAR VALVE OPERATION

28-22-00-011

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-22-00

**ENGINE FUEL FEED - FUEL SHUTOFF VALVE BATTERY****Purpose**

The fuel shutoff valve battery makes sure that the fuel system always has power to close these shutoff valves:

- Engine fuel shutoff valve
- APU fuel shutoff valve.

Components

The fuel shutoff valve battery and charger has these components:

- Aluminum case
- Battery assembly
- Printed circuit board assembly.

Battery Assembly

The battery assembly consists of 22 nickel-cadmium batteries and a temperature sensor. The batteries are connected in series to supply 28v dc to the valve actuators.

Printed Circuit Board Assembly

The printed circuit board assembly has a switch circuit and a charge circuit.

The switch circuit monitors the voltage of the hot battery bus. If the voltage goes below 22v, the switch circuit supplies power from the fuel shutoff battery to the valve actuator circuits.

The charge circuit uses power from dc bus 2 to charge the batteries.


28-22-00

EFFECTIVITY	
SIA ALL	


D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

ENGINE FUEL FEED - FUEL SHUTOFF VALVE BATTERY

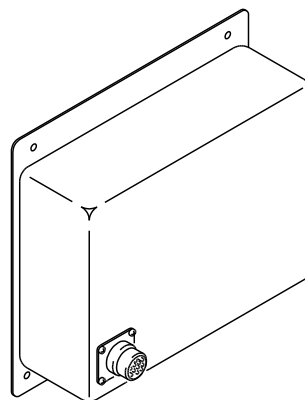

FUEL SHUTOFF VALVE BATTERY

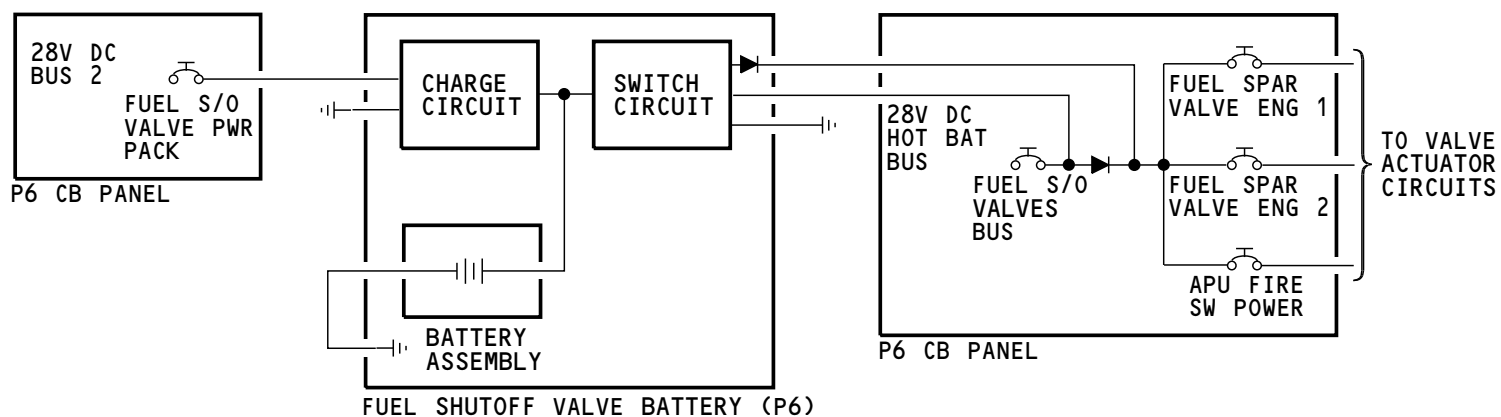

M84610 S0004626088_V1

ENGINE FUEL FEED - FUEL SHUTOFF VALVE BATTERY

28-22-00-014

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-22-00



ENGINE FUEL FEED - WATER SCAVENGE EJECTOR PUMP

General

The water scavenge ejector pumps remove water from the low points in each tank to prevent corrosion.

Location

The water scavenge ejector pumps are on the rear spar. There is one water scavenge ejector pump in main tank No. 1 and one water scavenge ejector pump in main tank No. 2. Access to the water scavenge ejector pump for main tank No. 1 is through an access panel on the bottom of the left wing. Access to the water scavenge ejector pump in main tank No. 2 is through an access panel on the bottom of the right wing.

There are two water scavenge ejector pumps in the center tank. Access to the water scavenge ejector pump in the left side of the center tank is through the left wheel well. Access to the water scavenge pump in the right side of the center tank is through the right wheel well.

Functional Description

The water scavenge ejector pumps operate automatically when the L and R center tank boost pumps and the main tank aft boost pumps are on. The water scavenge ejector pumps use fuel flow from the L and R center tank and main tank aft boost pumps as motive flow. The motive flow through the water scavenge ejector pump causes a suction. This suction takes water and fuel from the low points in each tank. The water and fuel that comes out of the water scavenge ejector pump goes to the L and R center tank and main tank aft boost pump inlets.


28-22-00-012

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-22-00

ENGINE FUEL FEED - WATER SCAVENGE EJECTOR PUMP

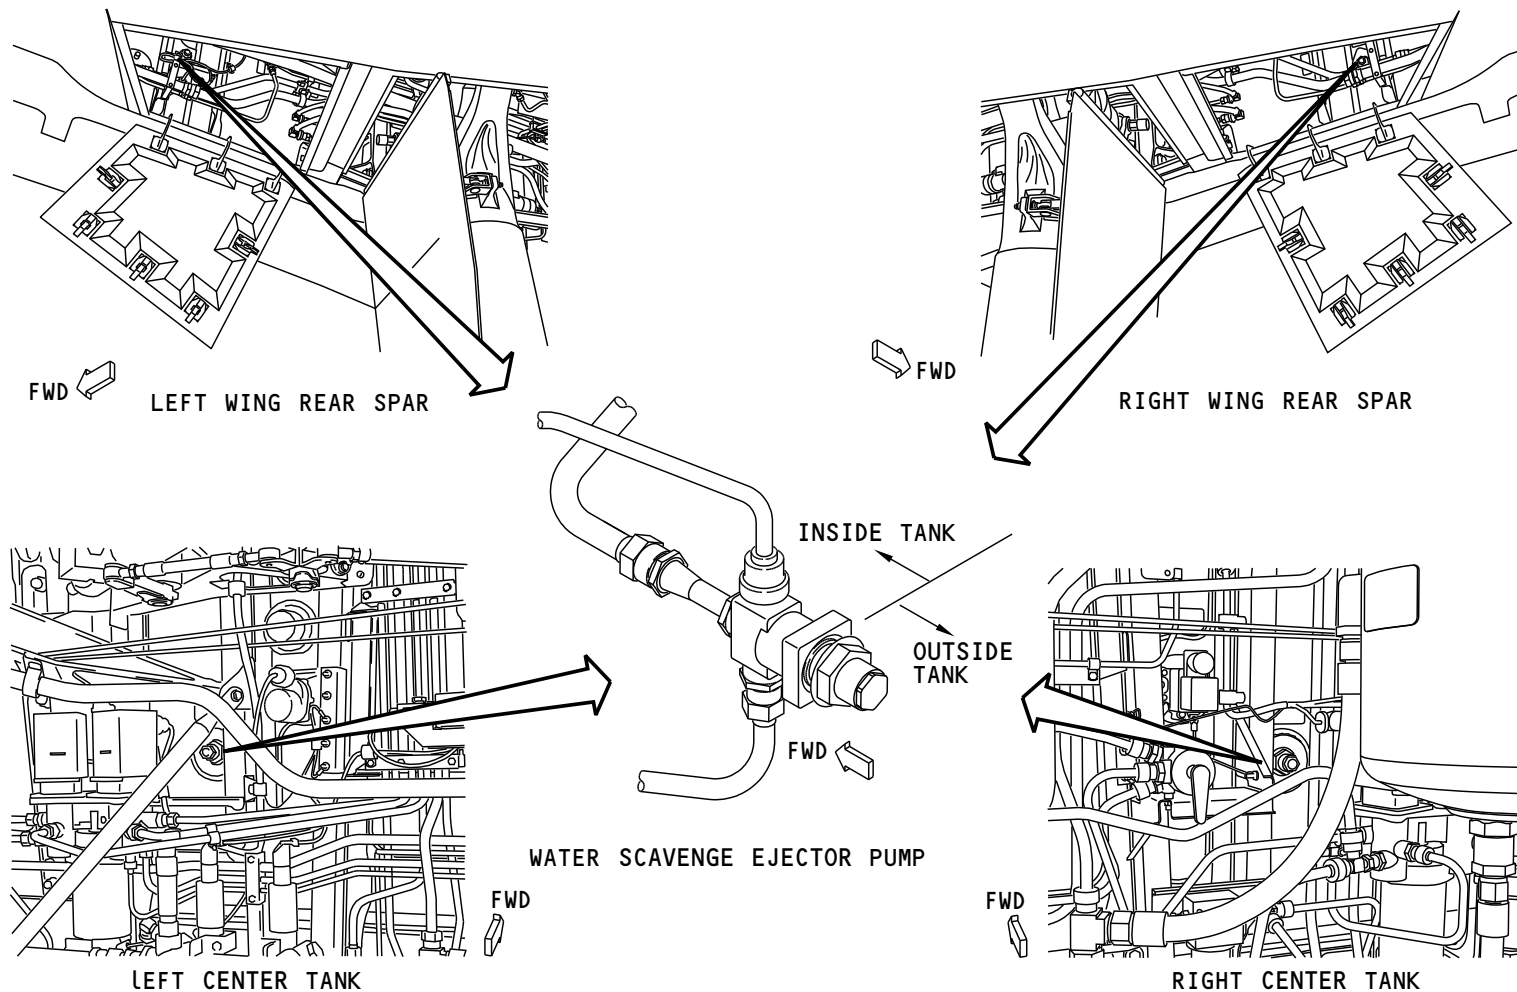

M84608 S0004626090_V1

ENGINE FUEL FEED - WATER SCAVENGE EJECTOR PUMP

28-22-00

28-22-00-012

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



ENGINE FUEL FEED - OPERATION

Fuel Panel

The fuel panel is on the P5 overhead panel. Switches on the panel control the boost pumps and the crossfeed valve.

Boost pump LOW PRESSURE lights come on when boost pump pressure is low.

Center tank boost pump LOW PRESSURE lights come on when the center tank boost pump switch is in the ON position and center tank boost pump pressure is low.

SPAR VALVE CLOSED lights come on dim when the engine fuel spar valve is closed. The SPAR VALVE CLOSED lights come on bright when there is a disagreement between the switch and valve position. The SPAR VALVE CLOSED lights are off when the engine fuel spar valve is open.

The crossfeed VALVE OPEN light comes on dim when the crossfeed valve is open. The crossfeed VALVE OPEN light comes on brightly when there is a disagreement between the switch and valve position. The crossfeed VALVE OPEN light is off when the crossfeed valve is closed.

Center Tank Engine Fuel Supply

Usually all pump switches are in the ON position at the beginning of a flight. The center tank supplies fuel to the engines. When the center tank is empty, you turn the center tank boost pumps to the OFF position.

Main Tank No. 1 and Main Tank No. 2 Fuel Supply

When the center tank is empty, and the boost pumps are on, fuel goes from the main tanks to the engines.

Crossfeed Operation

Fuel goes through the crossfeed valve to correct an imbalance between main tank No. 1 and main tank No. 2.


To correct an imbalance, open the crossfeed valve and turn off the boost pumps in the fuel tank that has less fuel.

Suction Operation


Suction supply from main tank No. 1 and main tank No. 2 occurs when all the boost pumps in one tank are off and the crossfeed valve is closed. The bypass valve in main tank No. 1 and/or main tank No. 2 opens. This lets main tank No. 1 and/or main tank No. 2 supply fuel to the engines. The engines can only suction fuel from main tank No. 1 and main tank No. 2.

EFFECTIVITY	
SIA ALL	

ENGINE FUEL FEED - OPERATION

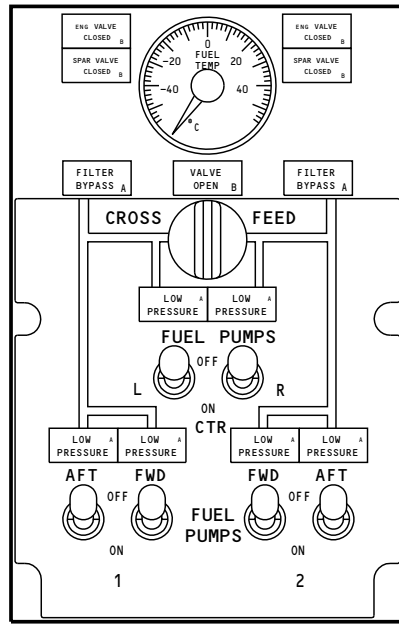

FUEL SYSTEM PANEL (P5-2)

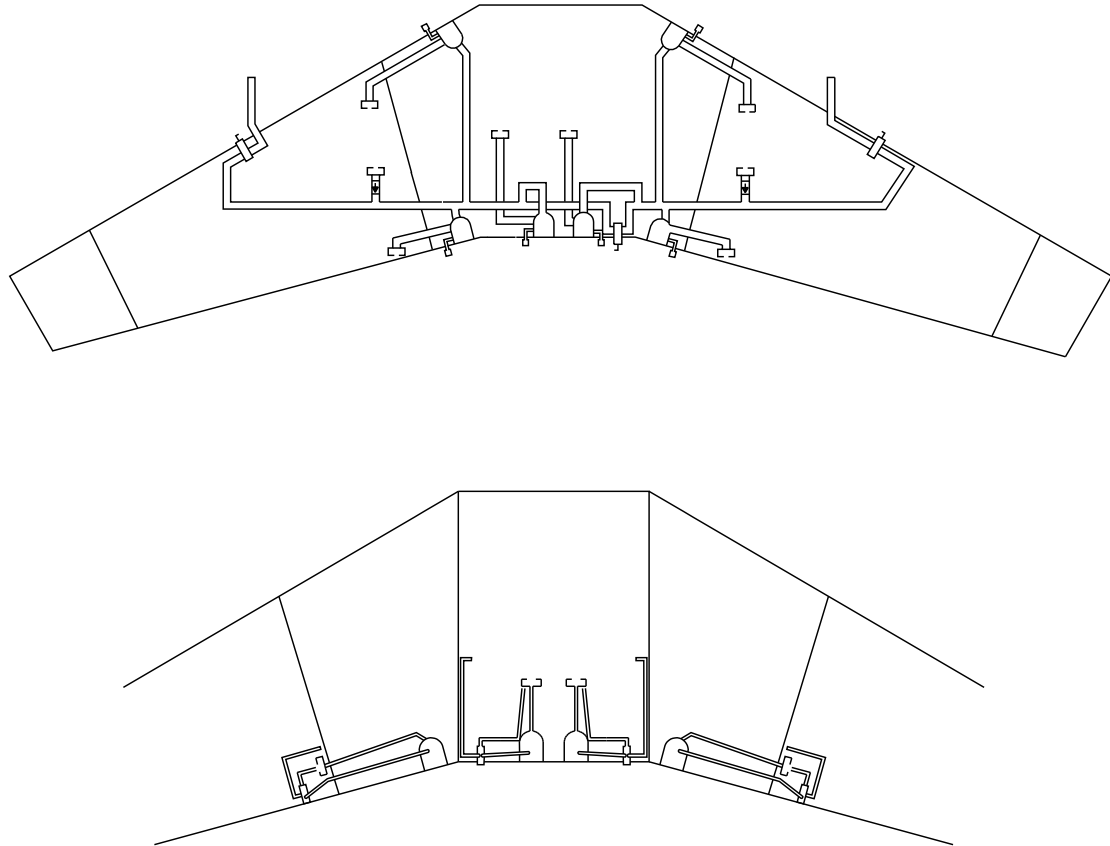

M84609 S0004626092_V1

ENGINE FUEL FEED - OPERATION

28-22-00

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-25-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details




APU FUEL FEED - INTRODUCTION

Purpose

The APU fuel feed system supplies fuel to the APU.



APU FUEL FEED - INTRODUCTION

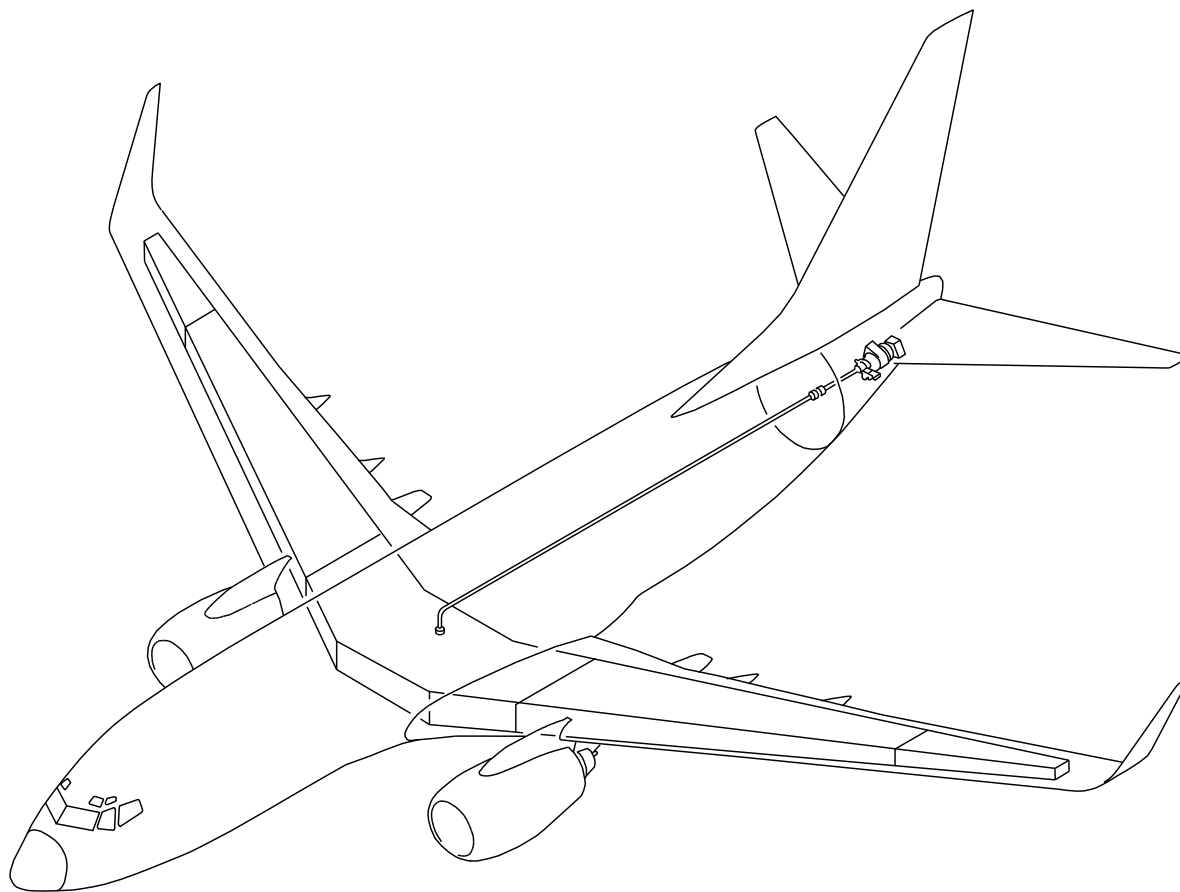

M84613 S0004626097_V1

APU FUEL FEED - INTRODUCTION

28-25-00

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



APU FUEL FEED - GENERAL DESCRIPTION

General

The APU fuel feed system supplies fuel from any tank to the APU.

APU Fuel Feed

The center tank boost pumps or the boost pumps in main tank No. 1 and main tank No. 2 supply fuel to the APU. If the boost pumps are off, the APU suctions fuel from main tank No. 1.

Control

The electronic control unit (ECU) controls fuel flow to the APU. The ECU receives inputs from these items:

- APU master switch
- Fire protection system
- APU sensors.

The ECU uses these inputs to control the APU fuel shutoff valve.

The fuel shutoff valve battery makes sure that the fuel system always has power to close the APU fuel shutoff valve.

Fuel Supply Line and Shroud

The APU fuel feed line sends fuel from the APU fuel shutoff valve to the APU fuel control unit.

A shroud collects fuel leaks from the APU fuel feed line. The shroud sends the fuel overboard through a drain mast.


28-25-00

EFFECTIVITY	
SIA ALL	

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

APU FUEL FEED - GENERAL DESCRIPTION

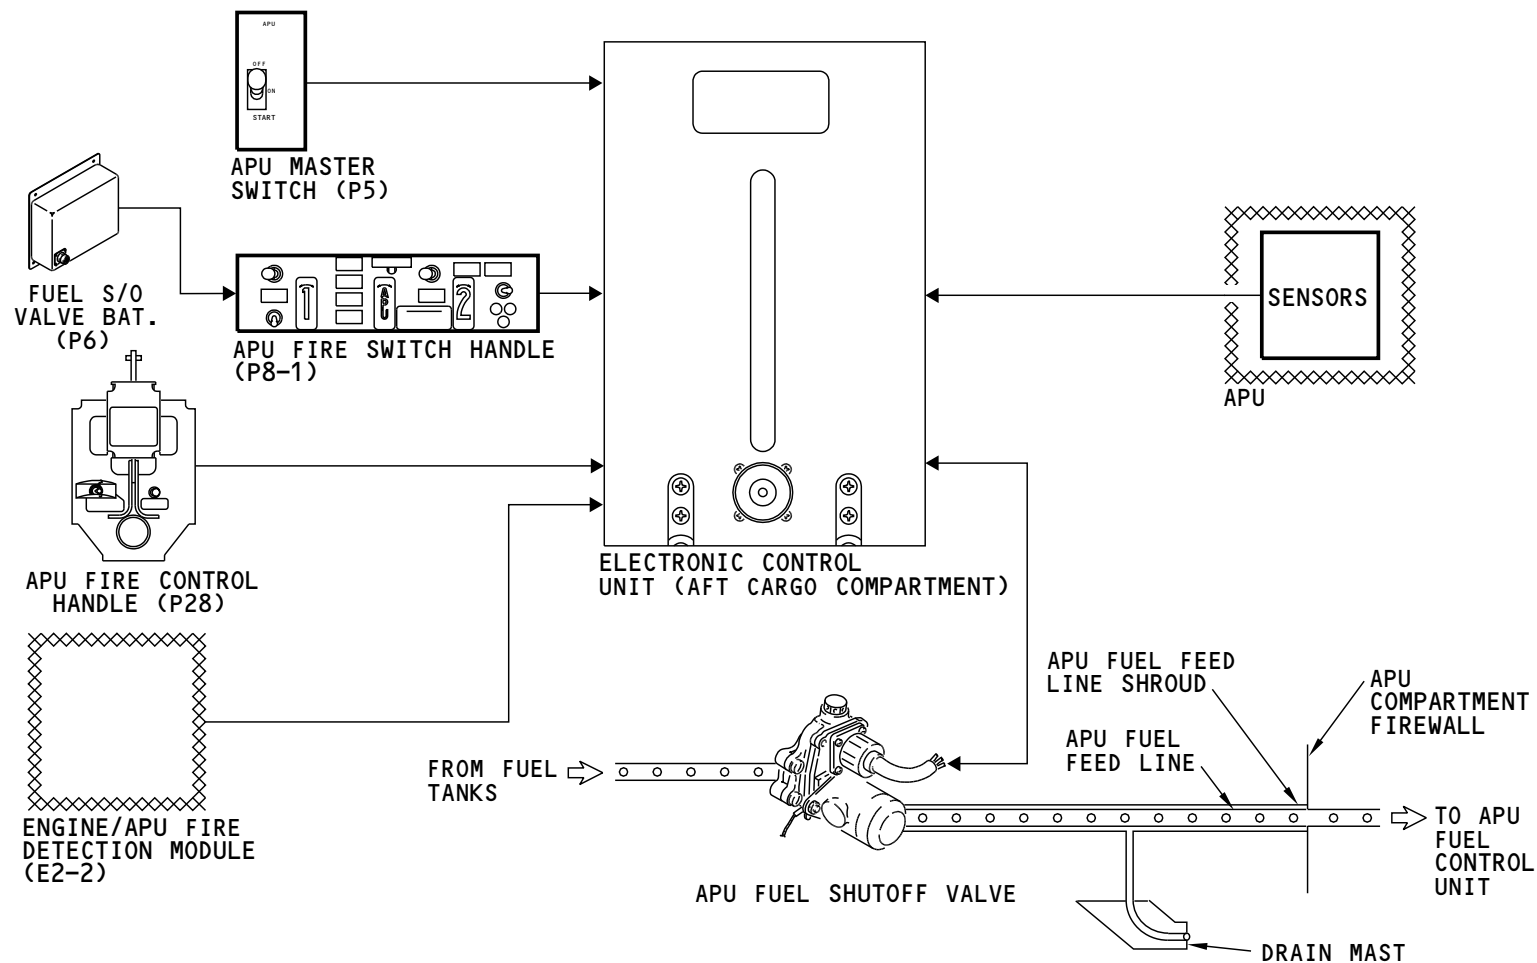

M84615 S0004626101_V1

APU FUEL FEED - GENERAL DESCRIPTION

28-25-00

28-25-00-001

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**APU FUEL FEED - COMPONENT LOCATION****General**

The APU fuel feed system has these components:

- APU fuel feed line
- APU fuel feed line shroud
- APU fuel shutoff valve.

APU Fuel Feed Line

The APU fuel feed line starts in main tank 1, goes through the center tank, then aft to the APU.

APU Fuel Feed Line Shroud


The APU fuel feed line shroud is around the APU fuel feed line. The shroud has a drain line that connects to a drain mast on the bottom of the left wing to body fairing.

APU Fuel Shutoff Valve

The APU shutoff valve is on the center section rear spar.

EFFECTIVITY	
SIA ALL	

APU FUEL FEED - COMPONENT LOCATION

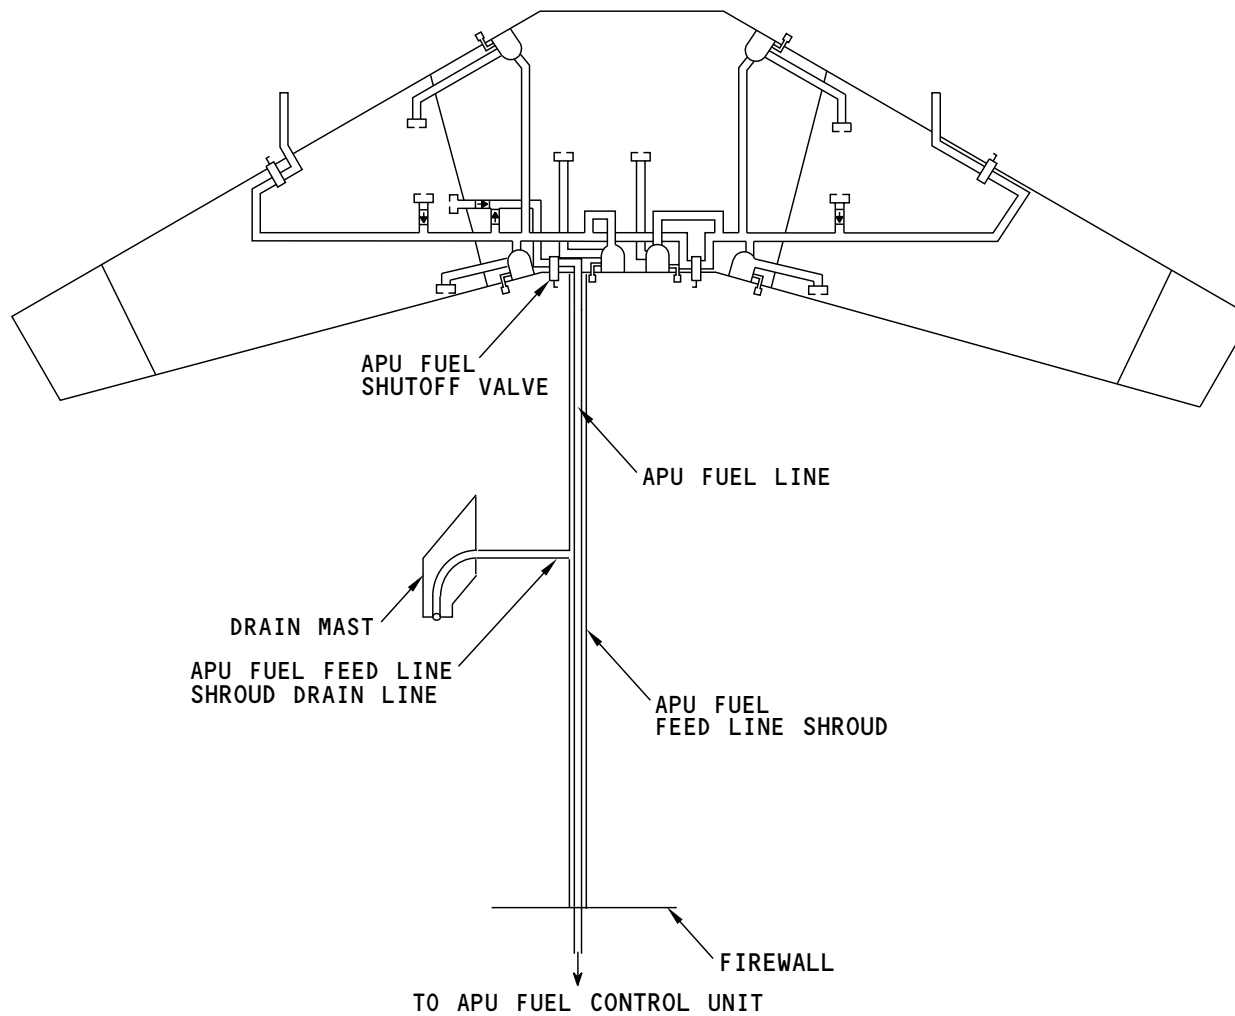

M84617 S0004626104_V1

APU FUEL FEED - COMPONENT LOCATION

28-25-00

28-25-00-002

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**APU FUEL FEED - APU FUEL SUPPLY LINE, SHROUD, AND DRAIN LINE****APU Fuel Supply Line and Shroud**

In the fuel tanks, the APU supply line is made from aluminum. Outside the tanks, the APU supply line is made from rubber and kevlar and is flexible. An aluminum shroud surrounds the rubber/kevlar APU fuel supply line.


Shroud Drain Line

The shroud drain line connects the fuel line shroud to the drain mast. Leaks in the fuel supply line, are contained by the shroud and flow overboard through the drain mast.

NOTE: This drain mast also drains hydraulic fluid from system A and B reservoirs.

EFFECTIVITY	
SIA ALL	

APU FUEL FEED - APU FUEL SUPPLY LINE, SHROUD, AND DRAIN LINE

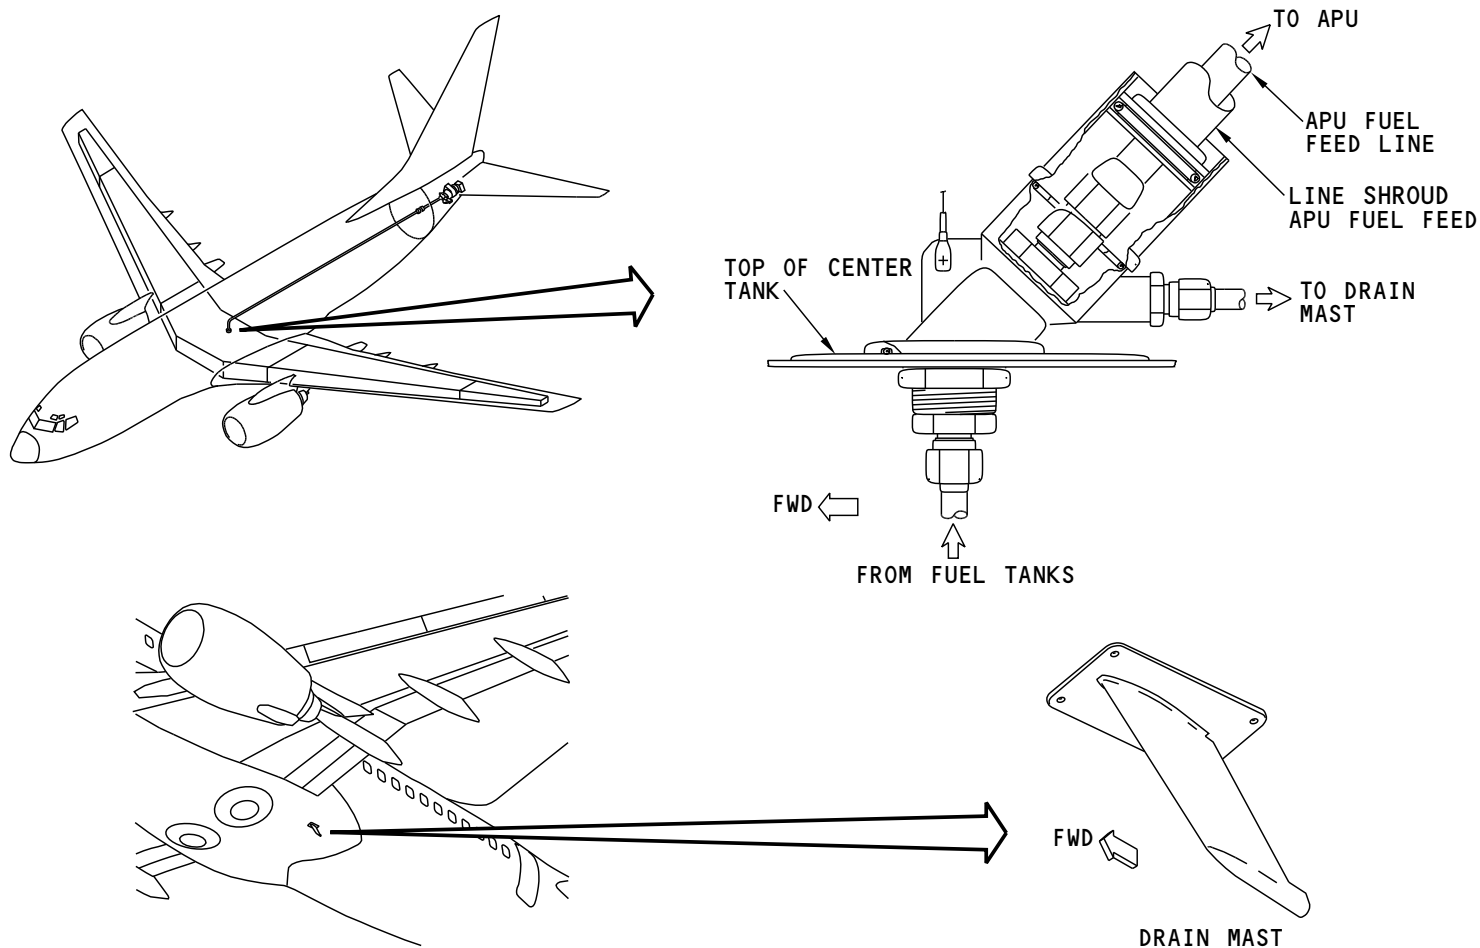

M84619 S0004626107_V1

APU FUEL FEED - APU FUEL SUPPLY LINE, SHROUD, AND DRAIN LINE

28-25-00

**APU FUEL FEED - APU FUEL SHUTOFF VALVE****General**

The APU fuel shutoff valve lets fuel flow from the left engine fuel feed manifold to the APU.

Location

The APU fuel shutoff valve is on the center section rear spar. Access is through the left wheel well.


Motor Actuated Valve

The motor actuated valve has a valve body and an actuator.

The valve body connects to the left engine fuel feed manifold and the APU fuel feed line. The valve is a rotary type valve. The alignment marks show valve position.

The actuator is a 28v dc motor. It has a manual override lever that permits valve operation without electrical power. The lever aligns with valve position indicators on the adapter. This shows valve position.

APU FUEL FEED - APU FUEL SHUTOFF VALVE

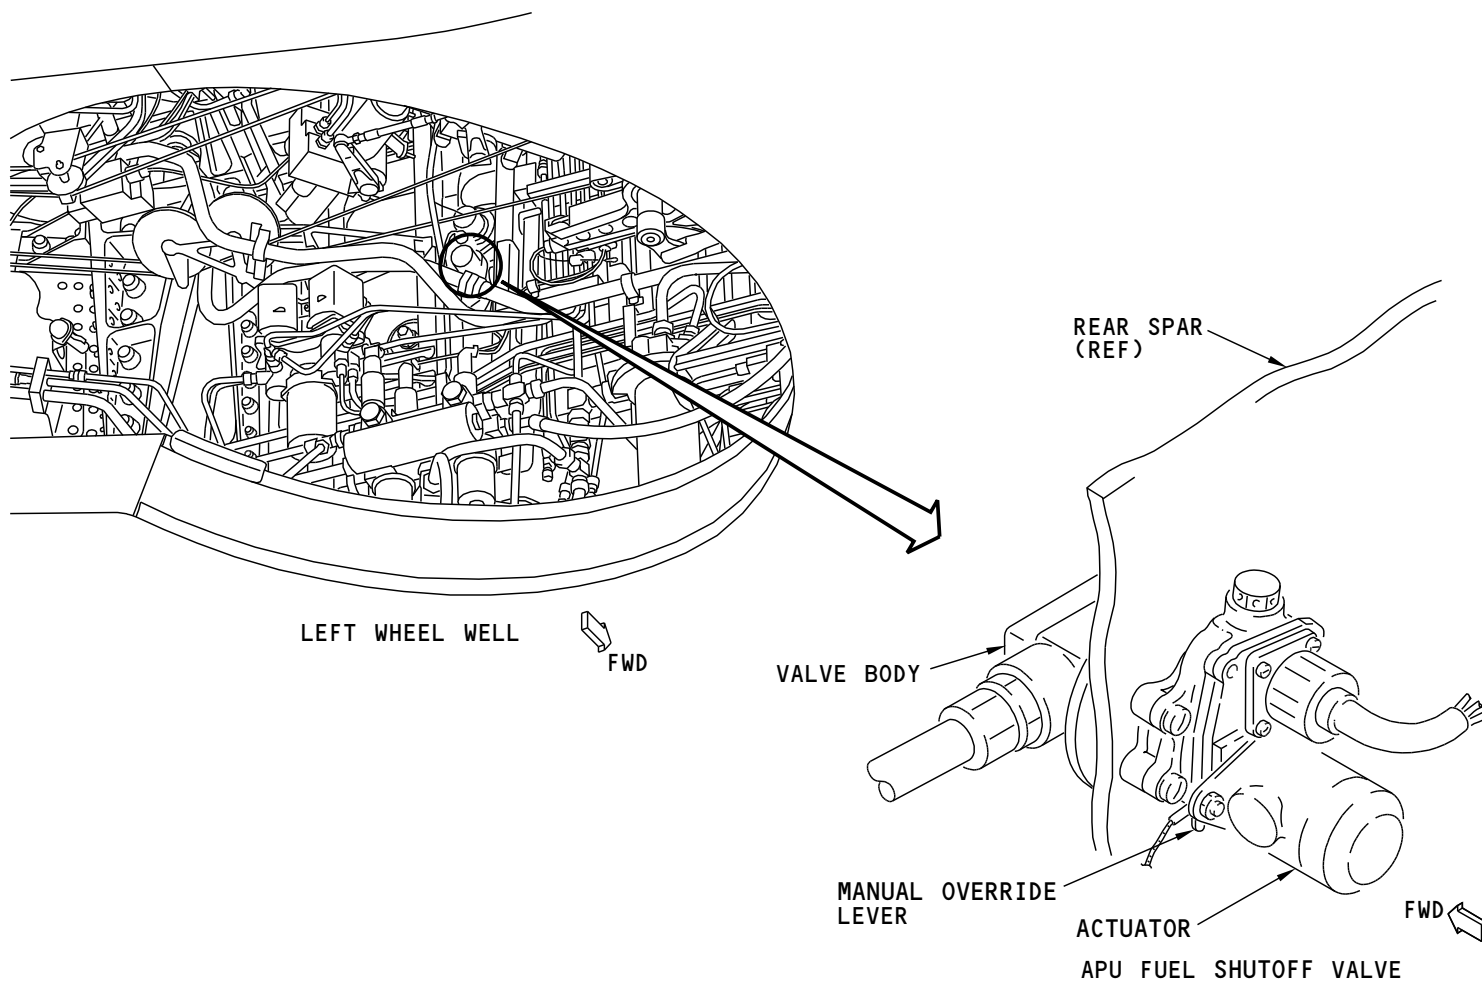

M84620 S0004626109_V1

APU FUEL FEED - APU FUEL SHUTOFF VALVE

28-25-00

APU FUEL FEED - APU FUEL SHUTOFF VALVE OPERATION**Control**

The electronic control unit (ECU) controls the APU shutoff valve. The ECU receives input from these components:

- APU switch
- APU fire control handle
- APU fire switch handle
- Engine/APU fire detection module
- APU sensors.

The ECU uses these inputs to open or close the APU shutoff valve.

The APU fuel shutoff valve opens when these conditions occur:

- The APU switch is in the START or ON position and
- The APU fire control handle and the APU fire switch handle are in the NORMAL position and
- The engine/APU fire detection module has not sent a fire signal to the ECU and
- The ECU has not received any out of limits signals from the APU sensors.

The APU fuel shutoff valve closes when these conditions occur:

- The APU switch is in the OFF position or
- The APU fire control handle is operated to the FIRE position or
- The APU fire switch handle is in the FIRE position or
- The engine/APU fire detection module sends a fire signal to the ECU or
- The ECU receives an out of limits signal from APU sensors.

NOTE: For more information on ECU function, see CHAPTER 49.


28-25-00

SIA ALL **EFFECTIVITY**

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

APU FUEL FEED - APU FUEL SHUTOFF VALVE OPERATION

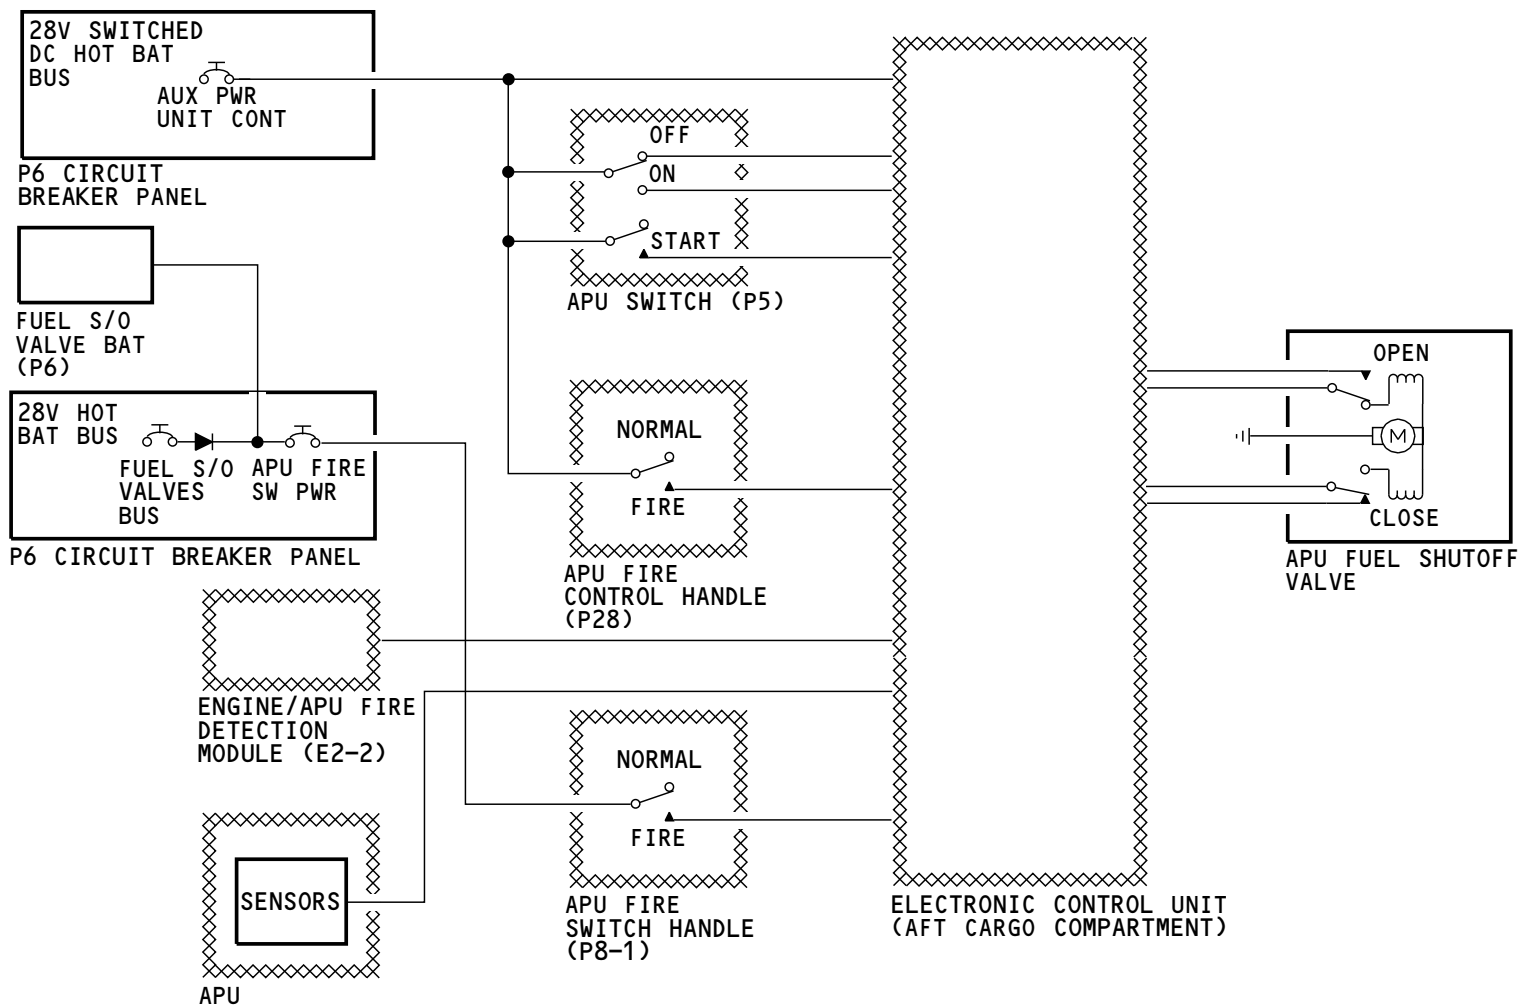

M84621 S0004626111_V1

APU FUEL FEED - APU FUEL SHUTOFF VALVE OPERATION

28-25-00

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-26-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



DEFUEL - INTRODUCTION


General

The defuel system removes fuel from the fuel tanks to the refuel station. The defuel system also permits fuel transfer from one fuel tank to another.

SIA ALL	EFFECTIVITY
	D633A101-SIA



DEFUEL - INTRODUCTION

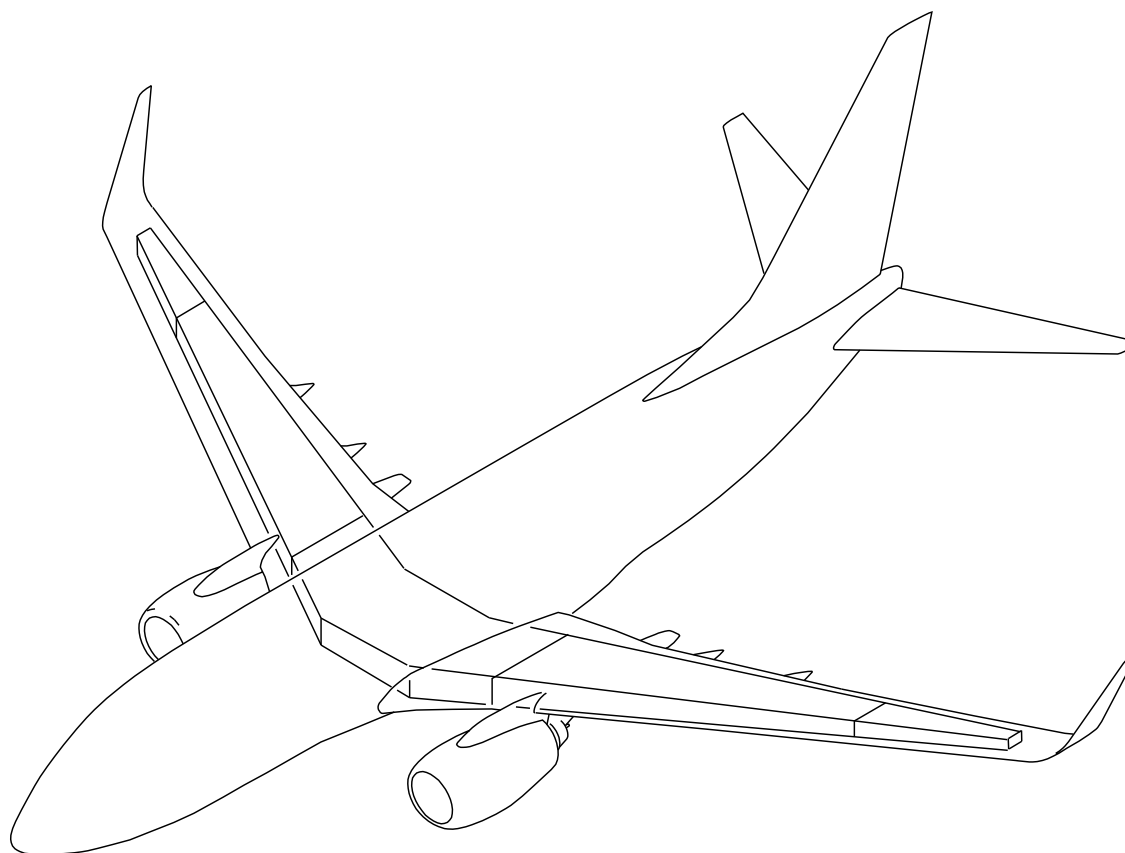

M84626 S0004626120_V1

DEFUEL - INTRODUCTION

28-26-00

28-26-00-000

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**DEFUEL - GENERAL DESCRIPTION****General**

The defuel system permits pressure defuel of each tank and suction defuel of the No. 2 tank.

The defuel system also allows fuel transfer on the ground from one fuel tank to another.

Pressure Defuel

You use these to pressure defuel the tanks:

- Refuel station
- Fuel pumps
- Defuel valve
- Crossfeed valve.

Suction Defuel

You use the defuel valve and refuel station to suction defuel the No. 2 tank.


NOTE: This uses the fuel vehicle defueling (suction) pump only. It should only be used when you cannot use electrical power on the airplane,

Fuel Transfer


You use the defuel valve, the refuel station, and the fuel control panel to transfer fuel between tanks.

EFFECTIVITY	
SIA ALL	


DEFUEL - GENERAL DESCRIPTION

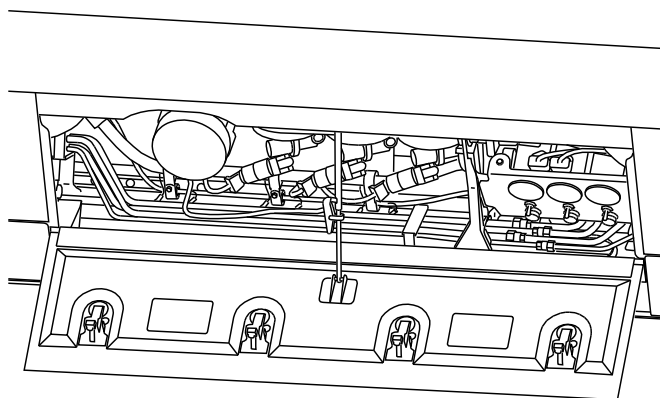

FUELING STATION (P15)

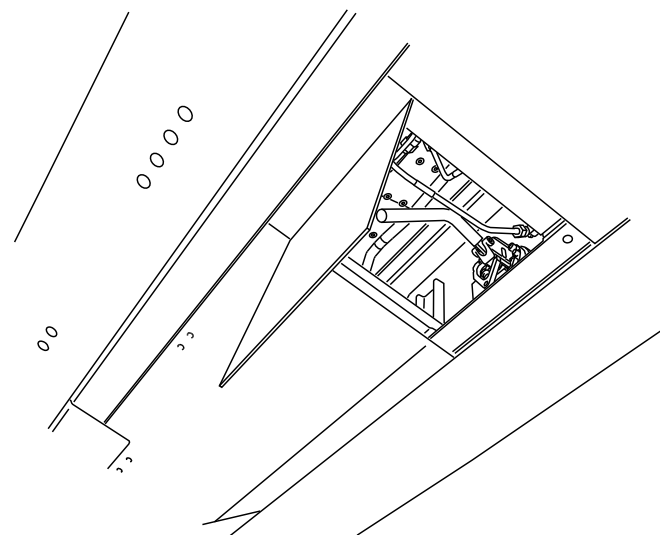

DEFUEL VALVE

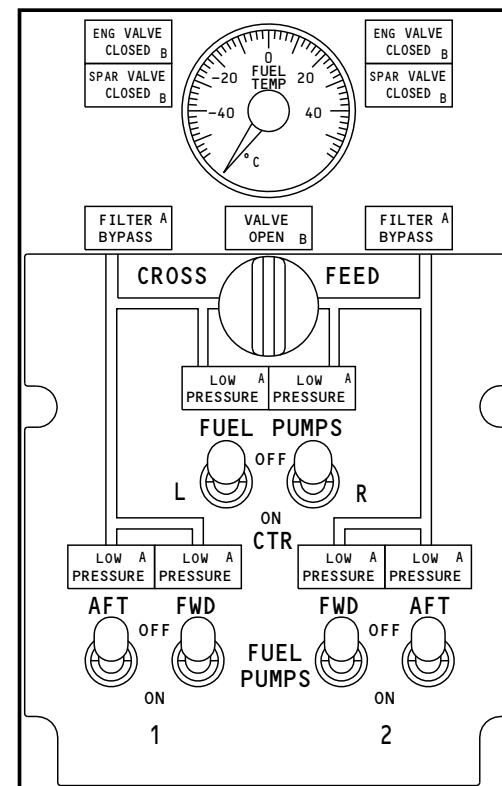

FUEL CONTROL PANEL (P5)

M84627 S0004626122_V1

DEFUEL - GENERAL DESCRIPTION

28-26-00-001

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-26-00




DEFUEL - COMPONENT LOCATION

Location

The defuel valve is located on the right wing front spar. The defuel valve connects between the right engine fuel feed manifold and refuel station tubing.

SIA ALL	EFFECTIVITY
D633A101-SIA	

DEFUEL - COMPONENT LOCATION

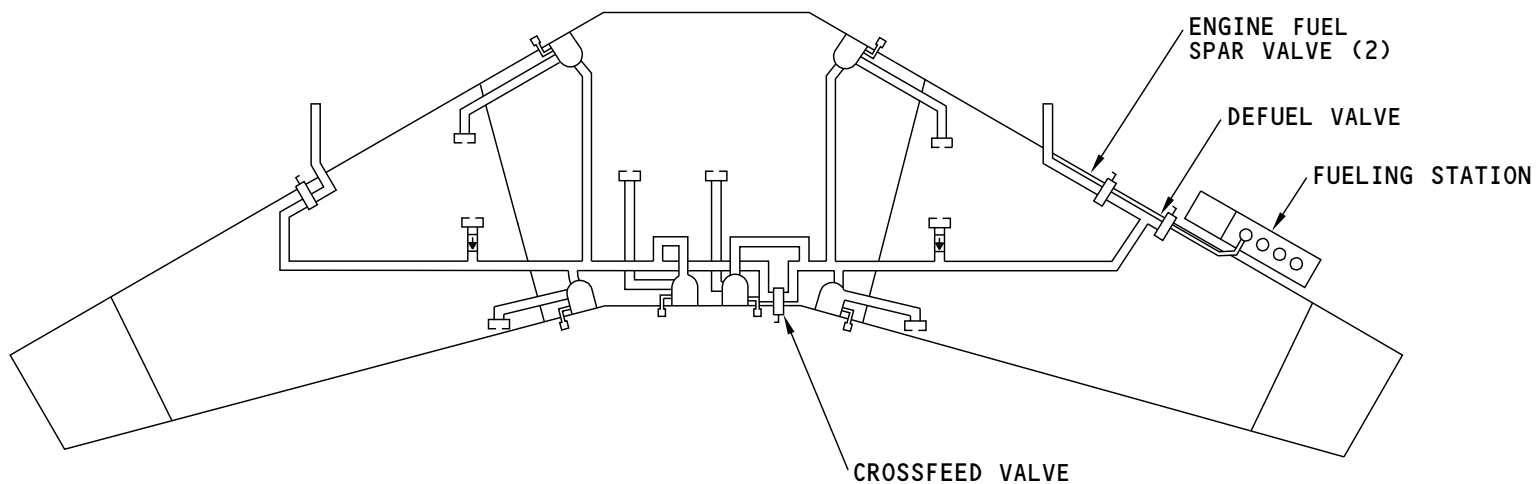

M84629 S0004626125_V1

DEFUEL - COMPONENT LOCATION

28-26-00-002

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-26-00

**DEFUEL - DEFUEL VALVE****Purpose**

The defuel valve connects the right engine fuel feed manifold with the defuel manifold. This permits removal of fuel from the fuel tanks.

Description

The defuel valve operates manually. It has these components:

- Handle
- Valve assembly.

Handle


The handle operates the defuel valve. The handle is also a position indicator. You cannot close the defuel valve access door with the handle in the open position.

Valve Assembly

The valve assembly attaches to structure inside the fuel tank. It connects to both the defuel manifold and the right engine fuel feed manifold.

EFFECTIVITY	
SIA ALL	

DEFUEL - DEFUEL VALVE

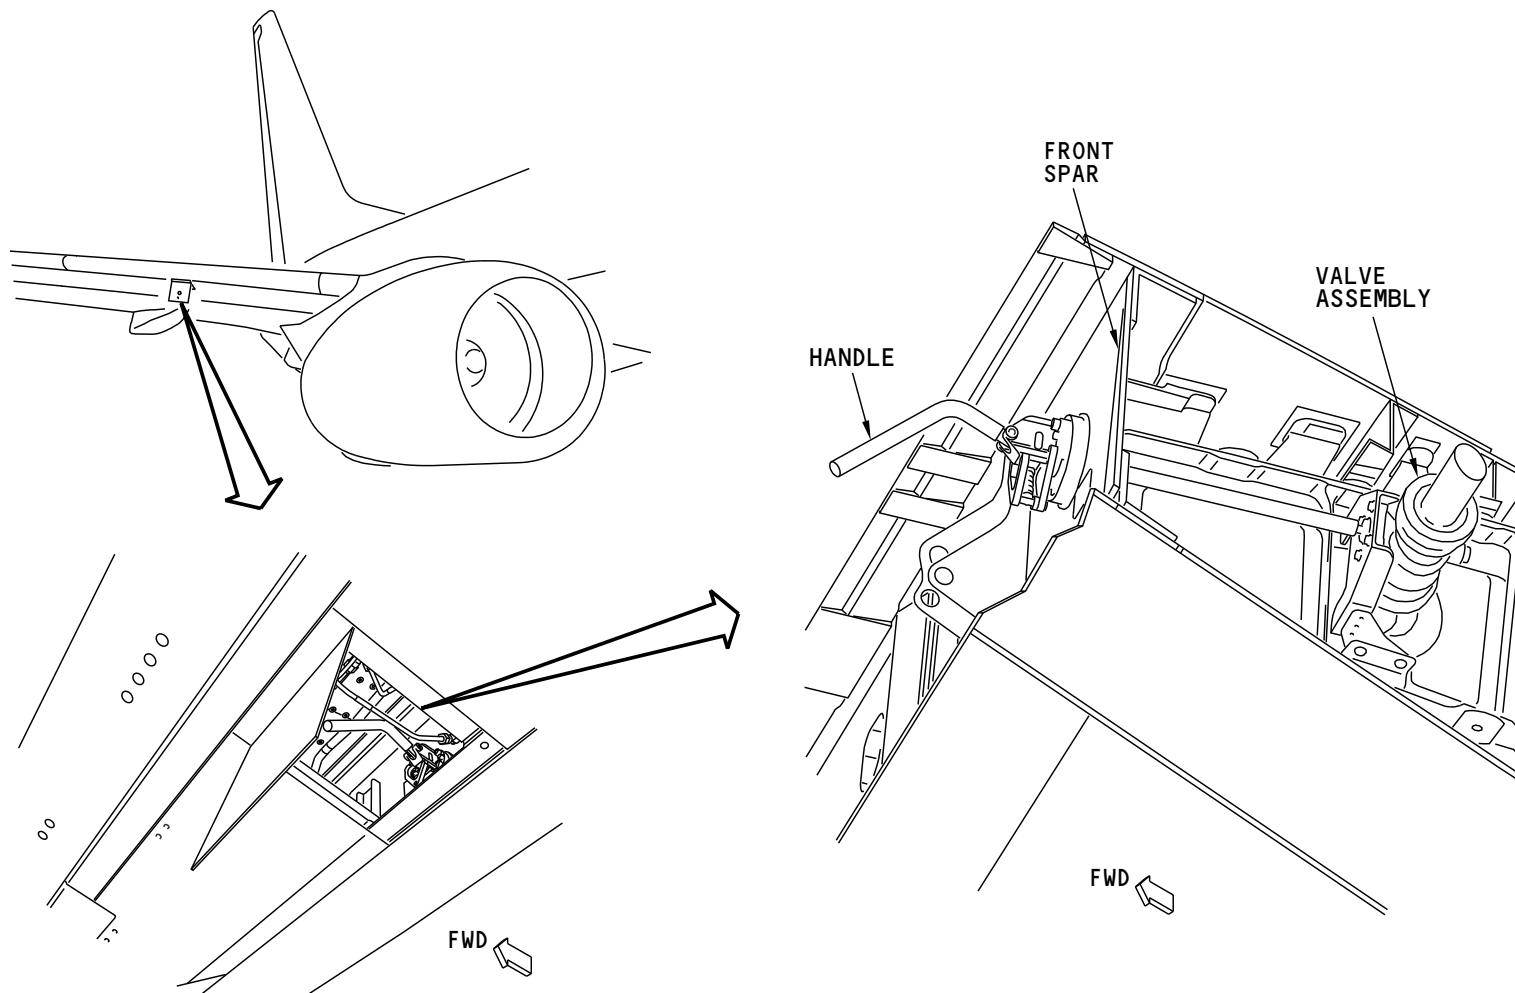

M84630 S0004626127_V1

DEFUEL - DEFUEL VALVE

28-26-00

**DEFUEL - OPERATION****General**

There are two ways to defuel the fuel tanks, pressure defuel and suction defuel. You can pressure defuel any tank. You can only suction defuel the No. 2 tank. You can transfer fuel between any tank.

Pressure Defuel

This is a summary of the pressure defuel procedure:

- Connect the refuel nozzles
- Move the handle on the defuel valve to the open position
- Turn on the boost pumps to the tank that you need to defuel
- Open the crossfeed valve if necessary
- Turn the boost pumps off when the tank is empty
- Move the handle on the defuel valve to the closed position
- Disconnect the fueling nozzles.

Suction Defuel

This is a summary of the suction defuel procedure:

NOTE: This uses the fuel vehicle defueling (suction) pump only. It should only be used when you cannot use electrical power on the airplane,


- Connect the fueling nozzles
- Move the handle on the defuel valve to the open position
- Close the crossfeed valve
- Start to suction fuel with the ground source
- When the fuel tank is empty, move the handle on the defuel valve to the closed position
- Disconnect the fueling nozzles.

Fuel Transfer


To transfer fuel between tanks you use the defuel system, fueling system, and the engine fuel feed system. This is a summary of the fuel transfer procedure:

- Move the defuel valve to the open position
- Turn on the boost pumps in the tank you want to defuel
- Open the crossfeed valve
- Move the refuel valve switch to the open position in the tank you want to put fuel into
- After fuel transfer, turn the boost pumps off
- Close the crossfeed valve
- Move the defuel valve to the closed position.


DEFUEL - OPERATION

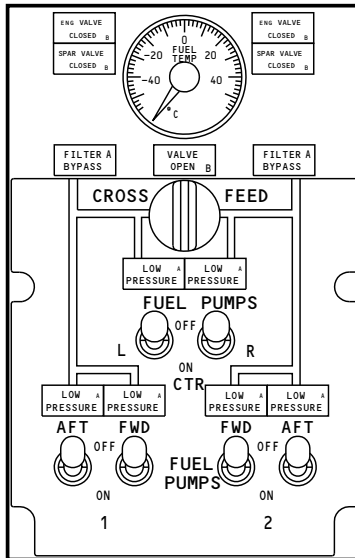


FUEL SYSTEM PANEL (P5)

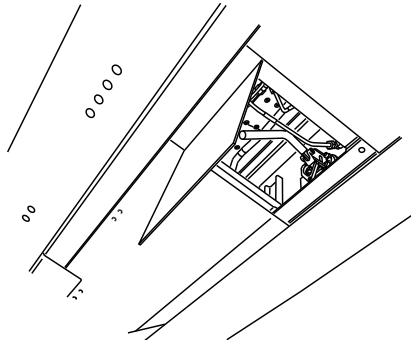

DEFUEL VALVE

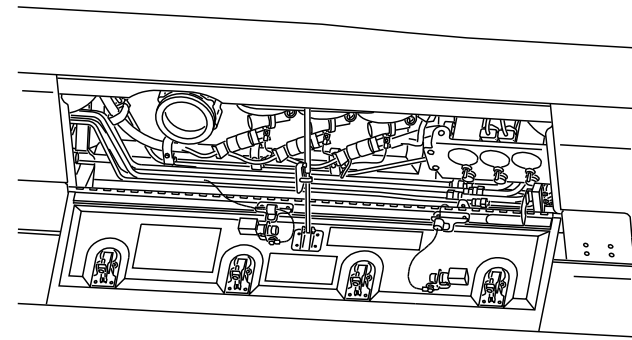

FUELING STATION (P15)

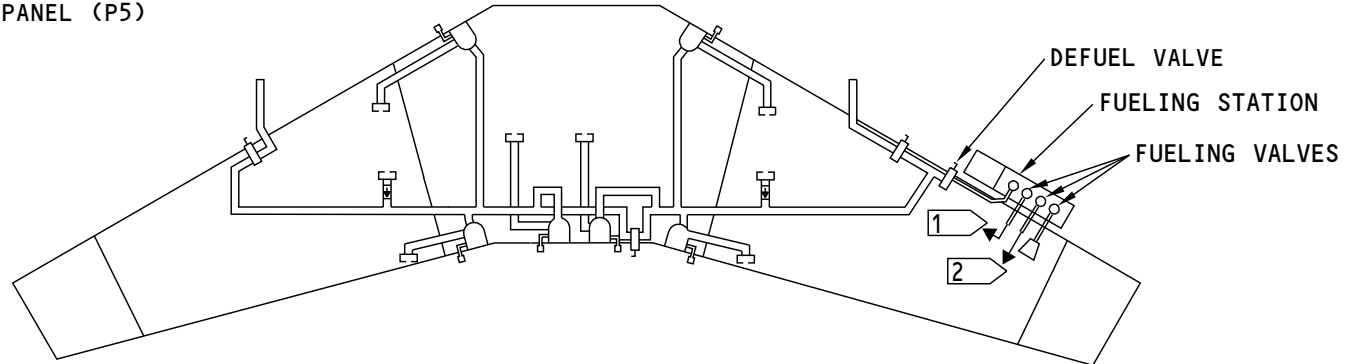

1 TO MAIN TANK 1 2 TO CENTER TANK

DEFUEL - OPERATION

M84631 S0004626129_V1

28-26-00



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-41-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details




FUEL INDICATING - INTRODUCTION

Fuel Quantity Indicating System (FQIS)


The FQIS measures fuel weight in the fuel tanks. The common display system (CDS) and the fueling panel show fuel quantity.

SIA ALL	EFFECTIVITY
D633A101-SIA	

FUEL INDICATING - INTRODUCTION

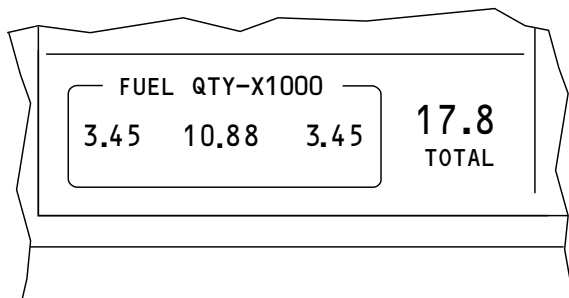

ENGINE DISPLAY
(EXAMPLE)

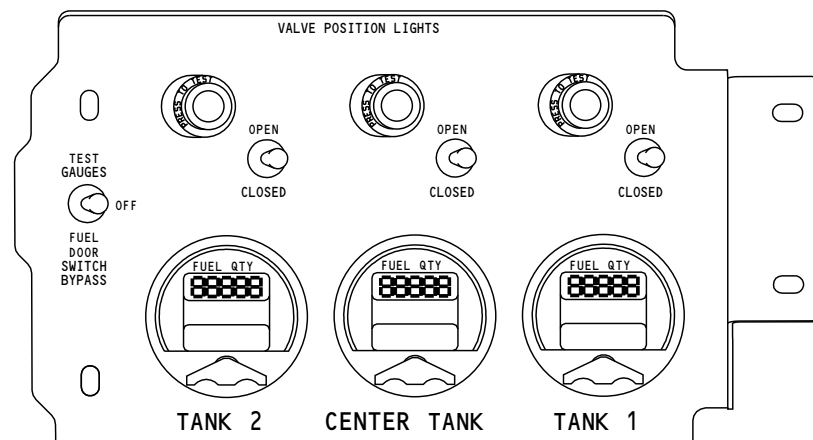

REFUEL PANEL (P15)

NOTE: ALL INDICATIONS ARE DISPLAYED IN KILOGRAMS OR POUNDS

M84639 S0004626140_V3

FUEL INDICATING - INTRODUCTION

**FUEL INDICATING - GENERAL DESCRIPTION****General**

The fuel quantity indicating system (FQIS) calculates the fuel weight in each fuel tank. The fuel quantity of each tank shows on the common display system (CDS). The fuel quantity processor unit (FQPU) calculates total fuel weight and supplies this to the FMCS.


Operation

The fuel quantity processor unit sends excitation to and receives signals from the tank units and the compensators. The fuel quantity processor unit uses these signals to calculate fuel quantity in each tank.

Each refueling indicator has an overfill indication. The quantity blinks on, then off, at a one second rate when the fuel in the tank is more than maximum rated capacity.

SIA ALL	EFFECTIVITY
	D633A101-SIA


FUEL INDICATING - GENERAL DESCRIPTION

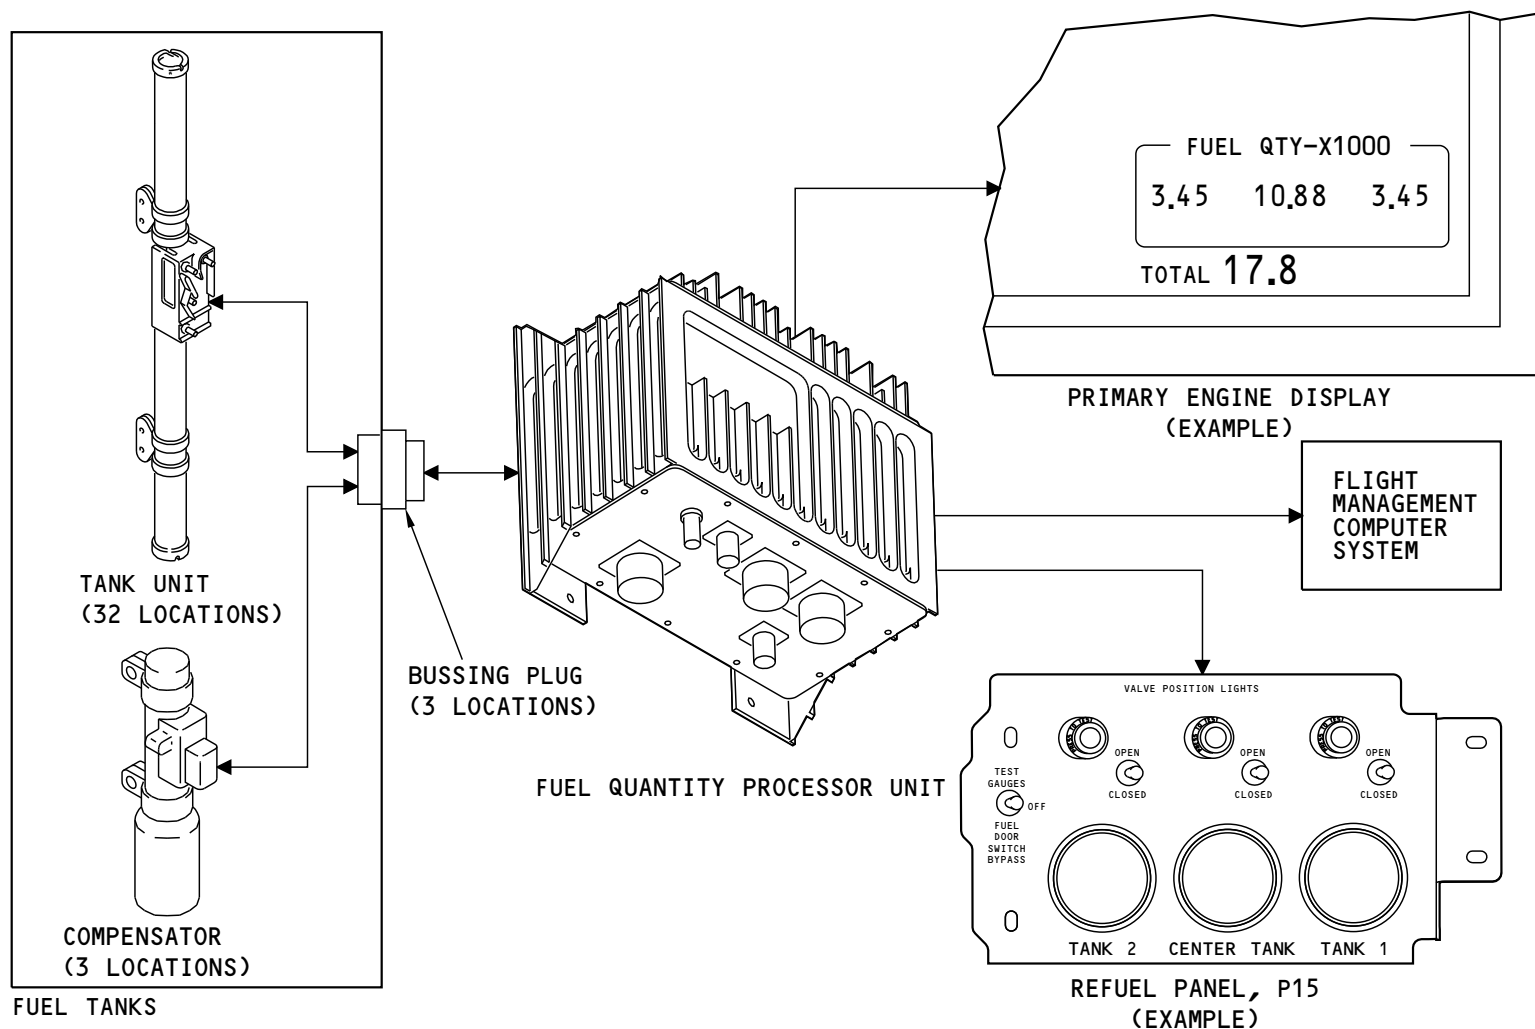

M84645 S0004626148_V3

FUEL INDICATING - GENERAL DESCRIPTION

FUEL INDICATING - GENERAL DESCRIPTION

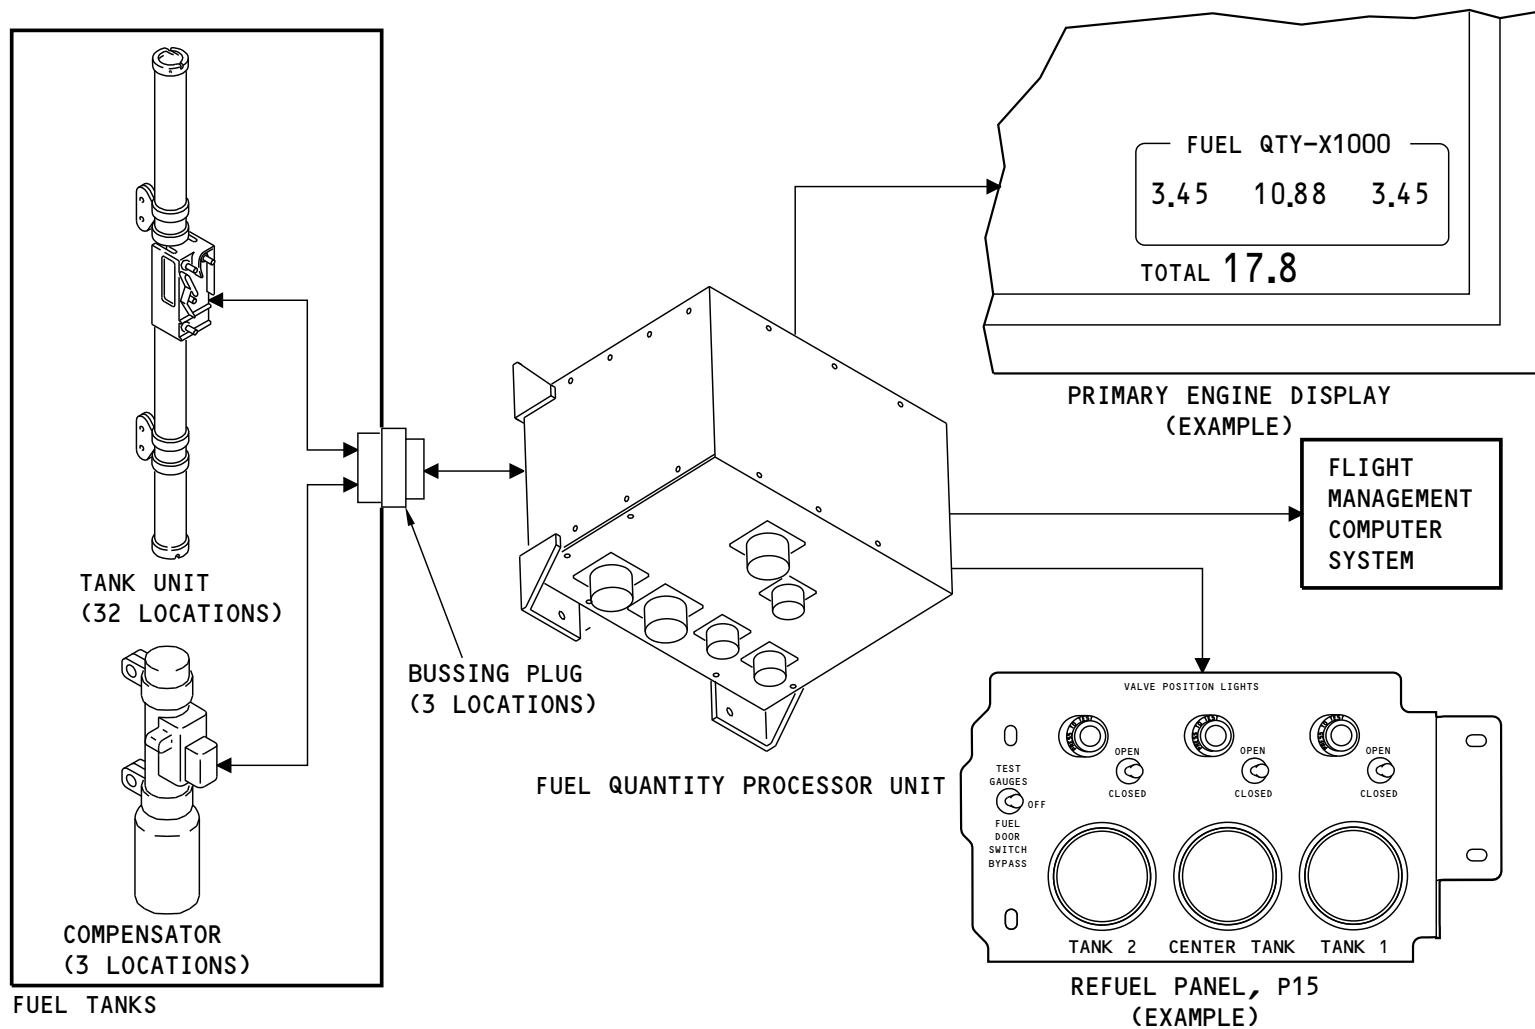

2297848 S0000521200_V1

FUEL INDICATING - GENERAL DESCRIPTION

28-41-00

EFFECTIVITY
SIA 711-714, 716-999

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-41-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL INDICATING - TANK UNITS AND COMPENSATORS

General

There are 32 tank units in the fuel tanks. There are 12 tank units in main tank 1 and 12 tank units in main tank 2. There are 8 tank units in the center tank.

There is one compensator in each tank.

Tank Units

The tank units measure fuel weight. The fuel quantity processor sends a common low impedance excitation signal to the tank units. The tank units return a single high impedance signal to the processor. This high impedance return signal is in proportion to fuel weight for the entire tank.


Compensators

The compensators correct for differences in fuel properties. The fuel quantity processor sends a low impedance signal to each compensator. The compensators return a high impedance signal to the processor. This high impedance return signal is in proportion to the dielectric of the fuel.

Each compensator is in the low point of its fuel tank. For most operations, fuel completely covers the compensator. The high impedance return signal from each compensator changes only for differences in fuel dielectric.

EFFECTIVITY	
SIA ALL	

FUEL INDICATING - TANK UNITS AND COMPENSATORS

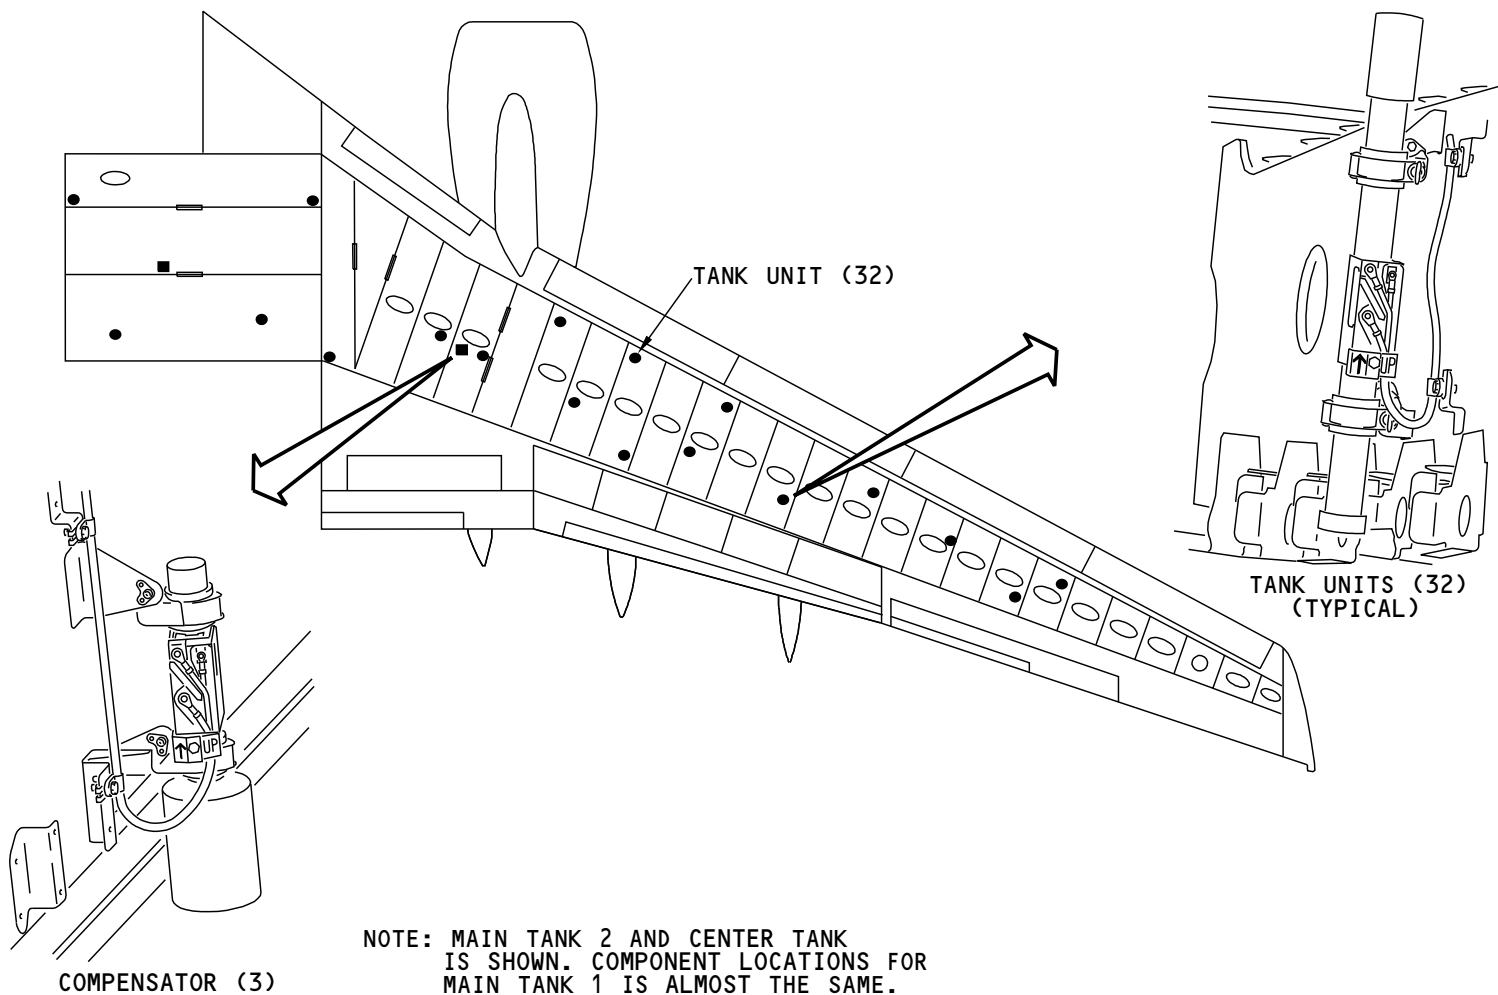

M84665 S0004626168_V1

FUEL INDICATING - TANK UNITS AND COMPENSATORS


28-41-00

**FUEL INDICATING - WIRE HARNESSES****General**

There is one wire harness in each tank. Each wire harness connects to the fuel tank units and the compensator in each tank. Each wire harness connects to a feed through connector inside the fuel tank. Outside the tank, each spar connector attaches to a busing plug. Each busing plug connects to the fuel quantity processor unit.

SIA ALL	EFFECTIVITY
	D633A101-SIA

FUEL INDICATING - WIRE HARNESSES

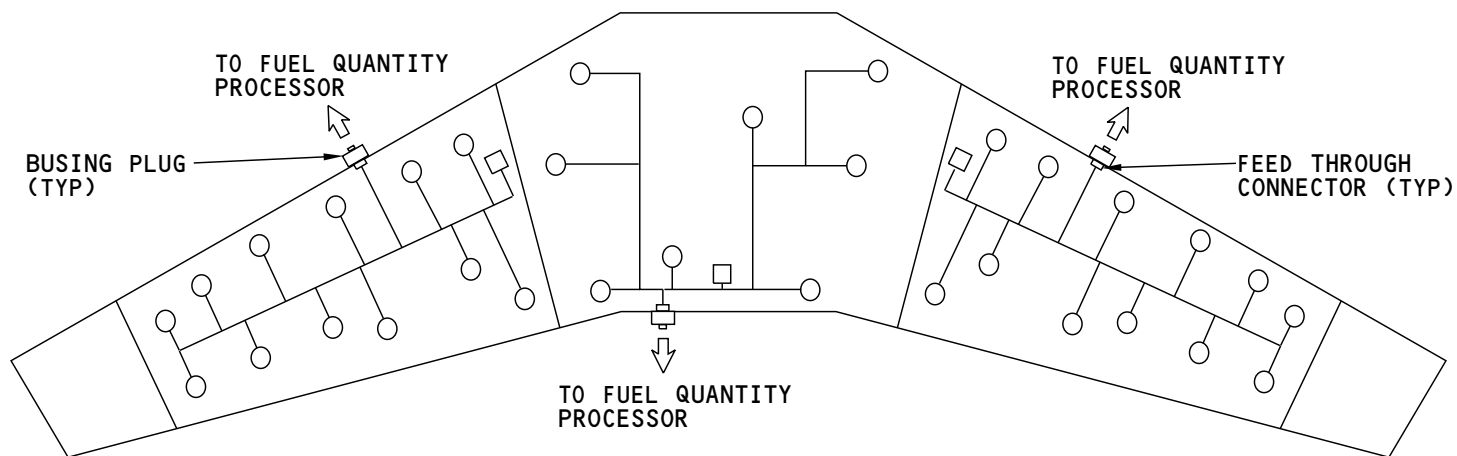

○ TANK UNIT
 □ COMPENSATOR

M84666 S0004626172_V1

FUEL INDICATING - WIRE HARNESSES

28-41-00

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT

Purpose

The fuel quantity processor unit does these functions:


- Calculates fuel weight in each tank
- Calculates the total fuel weight
- Sends fuel weight to the Common Display System (CDS)
- Sends fuel weight to the P15 fueling panel
- Sends fuel weight to the Flight Management Computer (FMC)
- Monitors the fuel system for faults
- Stores faults in non-volatile memory
- Sends fault data to the Control Display Units (CDUs).

Location

The fuel quantity processor unit is on the aft bulkhead of the forward equipment compartment.

SIA ALL	EFFECTIVITY
	D633A101-SIA

FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT

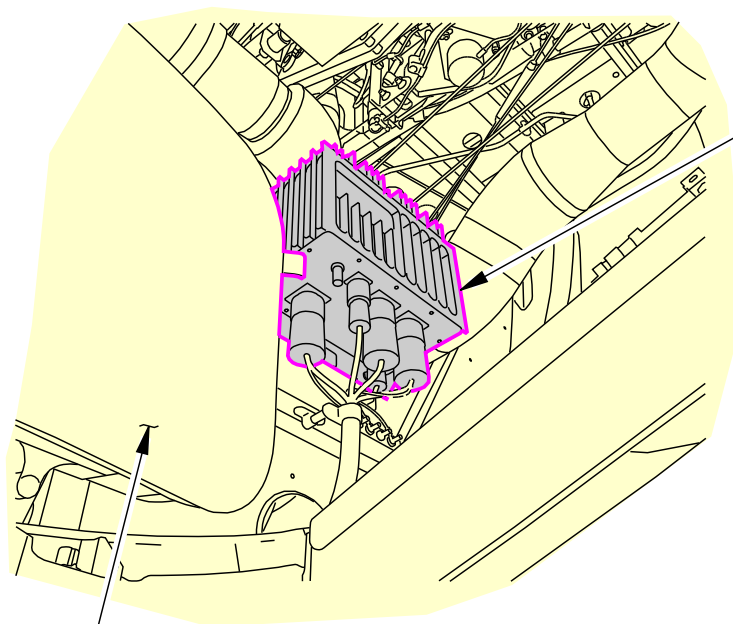


FORWARD
ACCESS DOOR, 112A

FORWARD EQUIPMENT COMPARTMENT

FUEL QUANTITY
PROCESSOR UNIT

A

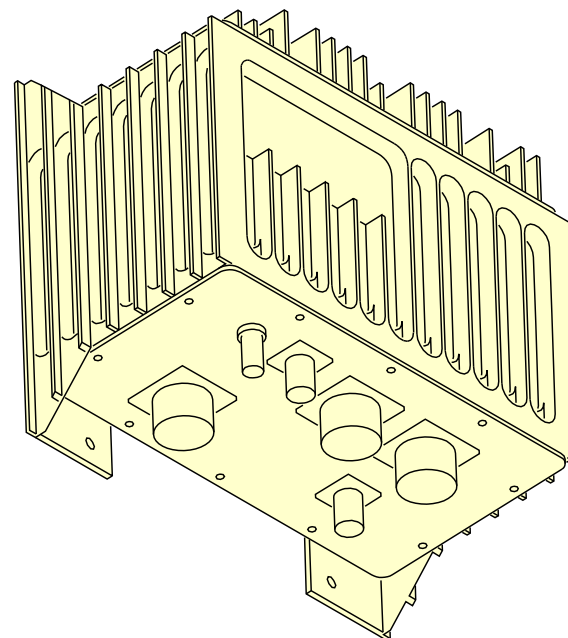

FUEL QUANTITY PROCESSOR UNIT

A

M84669 S0004626175_V2

FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT

28-41-00


28-41-00-004

EFFECTIVITY
SIA 702-710

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT

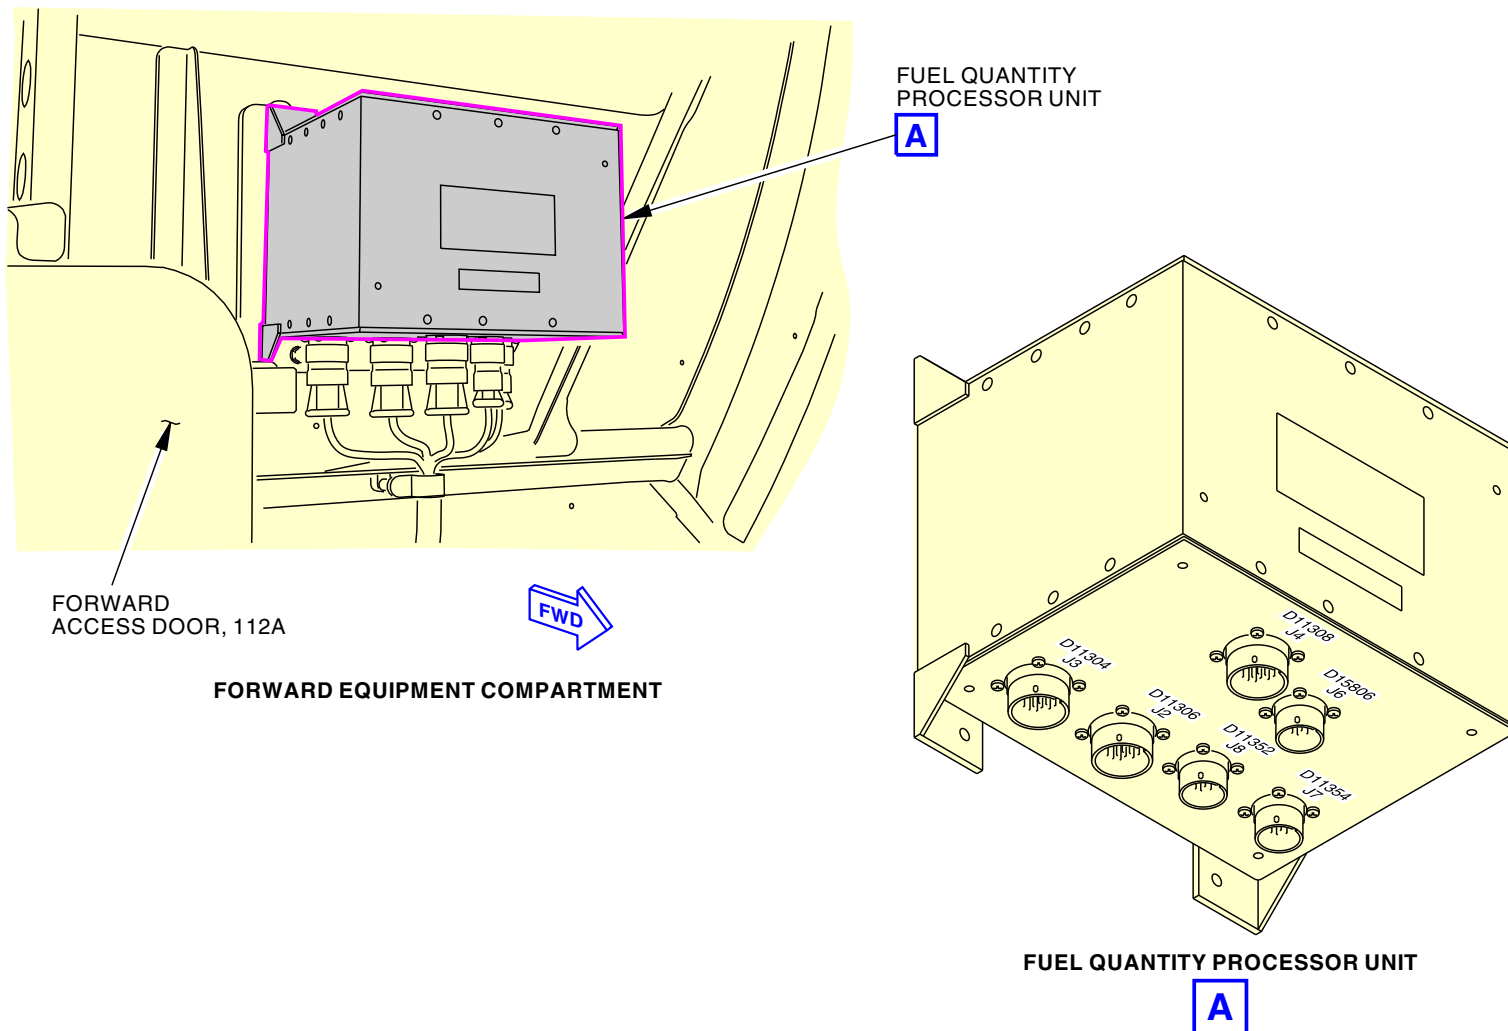

2298060 S0000521342_V2

FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT

28-41-00



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-41-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT - POWER****General**

The fuel quantity processor unit (FQPU) connects to two isolated 28v dc power sources at a time. The fuel quantity processor unit operates when one or both of the sources have power.

Power Sources

The FQPU can receive power from any of these three sources:

- 28v dc bus 1
- 28v dc hot battery bus
- 28v dc battery bus.

The power source normally available is the 28v dc battery bus. Transformer rectifier 3 (TRU3) is the normal power source for this bus. However, the battery or battery charger may also supply power to this bus if TRU3 power is not available and the battery switch is in the ON position.

When the fueling station door is in the closed position, processor unit power can come from dc bus 1. You must have AC power on the airplane to power this bus.

When the fueling station door is open and ground power is available, processor unit power can come from the 28v dc hot battery bus. The battery supplies power to this bus. It is not necessary to put the battery switch in the ON position for the battery to power this bus.

When the fueling indication test switch is in the FUEL DOOR BYPASS SWITCH position, processor unit power comes from the 28v dc hot battery bus.


28-41-00

EFFECTIVITY	
SIA ALL	

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT - POWER

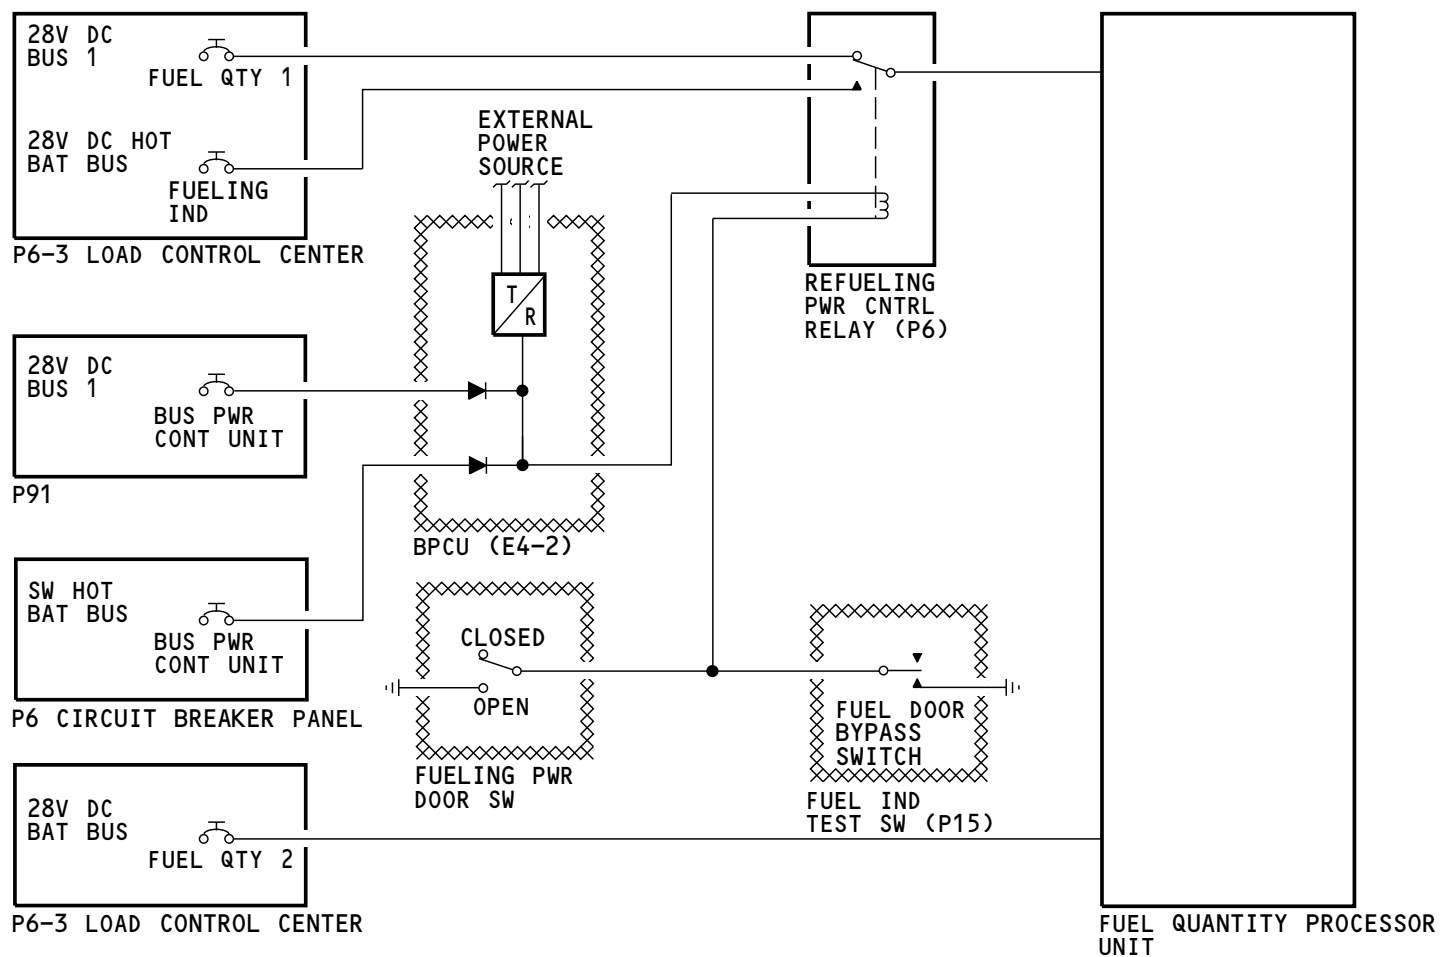

M84670 S0004626177_V1

FUEL INDICATING - FUEL QUANTITY PROCESSOR UNIT - POWER

28-41-00

SIA ALL	EFFECTIVITY
	D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**FUEL INDICATING - PROCESSOR - FUNCTIONAL DESCRIPTION****General**

The fuel quantity processor unit (FQPU) has three signal conditioner circuit cards (SCCC) and a BITE display card (BDC). Fuel quantity shows on the common display system (CDS).

Signal Conditioner Circuit Cards

There is one SCCC for each fuel tank. Each SCCC has these functions:

- Sends a low Z signal to the tank units and compensator
- Reads the high Z return signal from the tank units and compensators
- Calculates total fuel weight for its tank
- Changes analog signals to ARINC 429 signals
- Sends tank fuel weight data to the DEUs
- Sends real time fault data to the BDC.

The tank 2 SCCC also sends total fuel tank weight to the FMC.

BITE Display Card

The BDC has these functions:

- Keep fault data in non-volatile memory

| SIA 702-710

- Send a signal to each SCCC to start a real time test for fault isolation

SIA 711-714, 716-999

- Send a signal to the BDC to show the real time test data

SIA ALL

- Send and receives fault data with the flight management computer for fault isolation.


28-41-00

EFFECTIVITY	
SIA ALL	

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

FUEL INDICATING - PROCESSOR - FUNCTIONAL DESCRIPTION

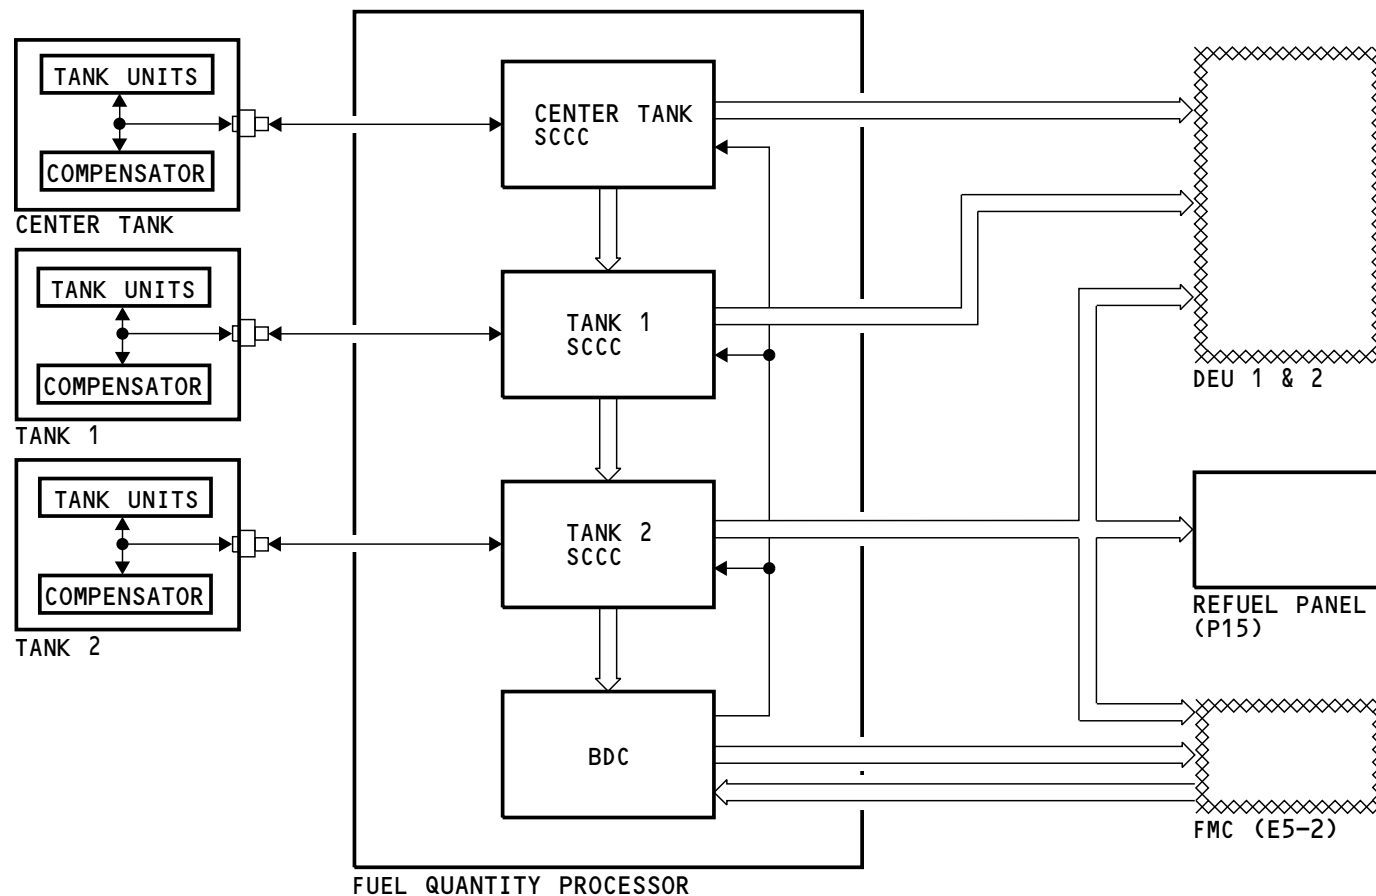

M84672 S0004626180_V1

FUEL INDICATING - PROCESSOR - FUNCTIONAL DESCRIPTION

28-41-00

SIA ALL	EFFECTIVITY
	D633A101-SIA

FUEL INDICATING - FUEL QUANTITY INDICATIONS**General**

Individual fuel tank quantity shows on the CDS and the refuel panel.

Fuel quantity shows in pounds or kilograms.

Fuel Configuration Messages

Fuel configuration messages show on the CDS. These messages show a problem with the configuration of the fuel system.

The LOW message shows that either main tank 1 or main tank 2 has less than 2,000 lb (907 kg) of fuel. This message goes away when there is more than 2,500 lb (1133 kg) of fuel in that tank. The low fuel condition must exist for 30 seconds before the LOW message shows.

The IMBAL message shows when there is a difference of 1,000 lb (453 kg) between main tank 1 and main tank 2. The message goes away when the difference between tanks is 200 lb (90 kg) or less. The IMBAL message does not show when the LOW message shows. The imbalance condition must exist for 60 seconds before the IMBAL message shows.

The CONFIG message shows when all of these conditions exist:

- More than 1600 lb (726 kg) of fuel in the center tank
- Both center tank fuel boost pump switches are off
- Either engine is in operation.

After the CONFIG message shows, it stays on until one or more of these conditions are true:


- 800 lb (360 kg) or less of fuel in the center tank
- A minimum of one center tank pump is producing high pressure
- The two engines are not in operation.

28-41-00**SIA ALL** **EFFECTIVITY**


D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

FUEL INDICATING - FUEL QUANTITY INDICATIONS

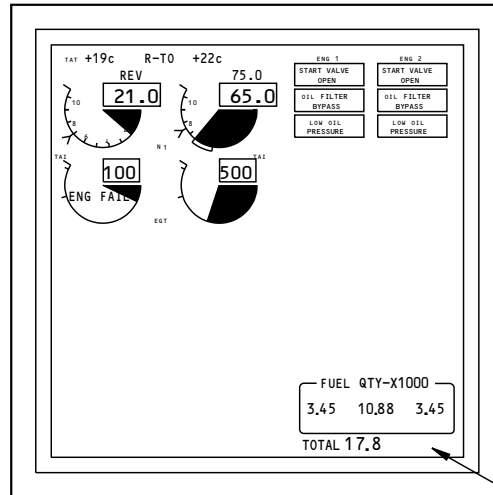


SEE (A)

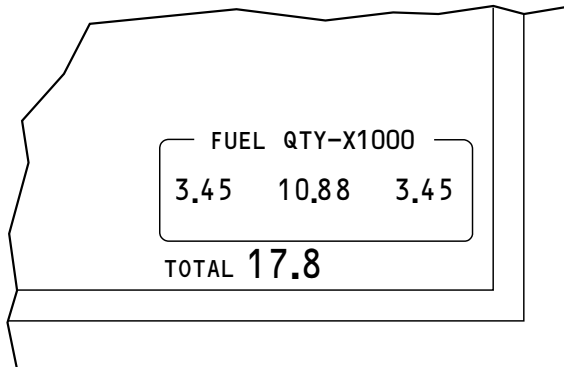


NORMAL

(A)

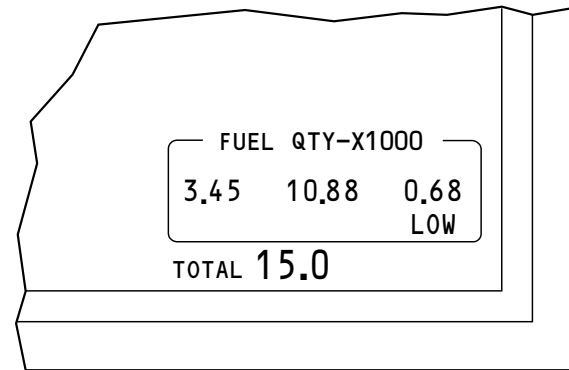

LOW MESSAGE

(A)

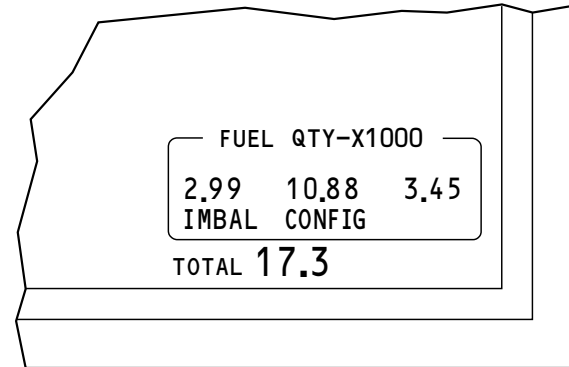

CONFIG AND IMBAL MESSAGE

(A)

NOTE: ALL INDICATIONS ARE DISPLAYED IN KILOGRAMS OR POUNDS.

FUEL INDICATING - FUEL QUANTITY INDICATIONS

J75599 S0000178441_V2

28-41-00

**FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST MAIN MENU PAGES****General**

You use the control display units (CDU) to do troubleshooting on the fuel indicating system. The CDU shows real time and recorded system fault data. The fuel quantity processor monitors and stores the data that shows on the CDU. You can only use the CDU to see the FQIS BITE test pages when the airplane is on the ground.

Main Menu Pages

The FQIS BITE test main menu pages allow you to select other FQIS BITE test pages. These are the FQIS BITE test pages:

- Current status
- Inflight faults
- Ground test
- Ident/config
- Input monitoring
- Erase fault history.

Current Status Page

The current status page shows fuel indication system faults that currently exist on the airplane.

Inflight Faults Pages

The inflight faults pages show recorded fuel indication system faults from previous flight legs.

Ground Test Pages

The ground test pages allow you test the FQIS processor.

Ident/Config Pages

The ident/config pages show data from the configuration of the fuel quantity processor unit.

Input Monitoring Pages


The input monitoring pages show real time fuel quantity data for each fuel tank.

Erase Fault History Pages

The erase fault history pages allow you to erase recorded fault data from the fuel quantity processor memory.

EFFECTIVITY	
SIA ALL	

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST MAIN MENU PAGES

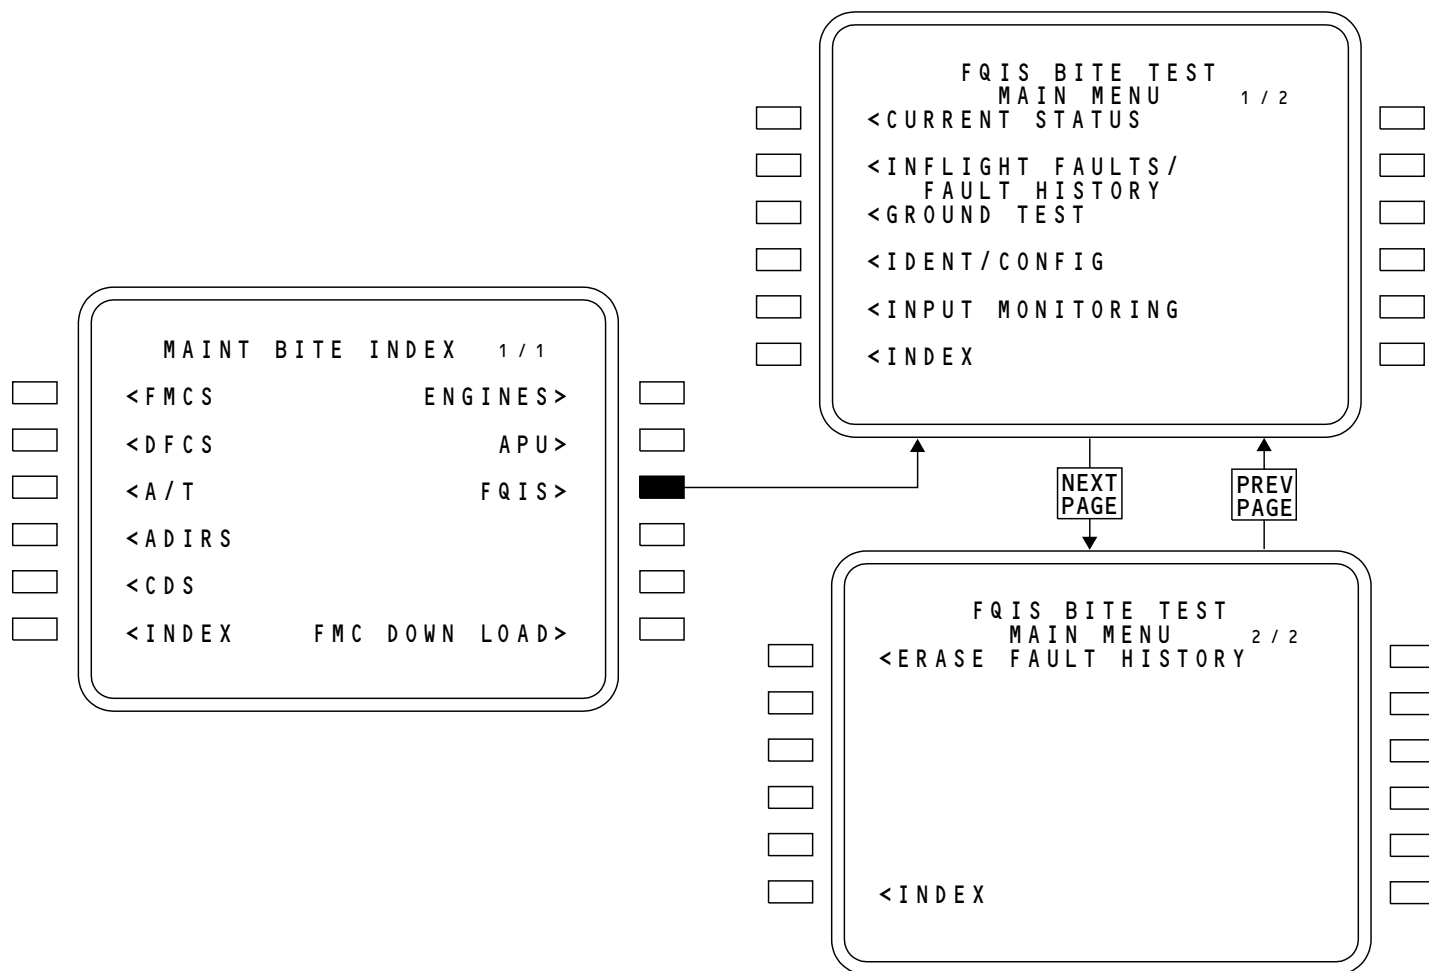

M84679 S0004626193_V1

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST MAIN MENU PAGES

28-41-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST CURRENT STATUS PAGE

Current Status Page


The current status page shows faults that are currently active. As the number of active faults increases, the number of current status pages increase. You can access all current status pages to see all current faults. A number shows which current status page you are on as well as the total number of current status pages you can access. For each fault, this data shows:

- Maintenance message
- Fault number
- Brief description of the fault.

SIA ALL	EFFECTIVITY
D633A101-SIA	



FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST CURRENT STATUS PAGE

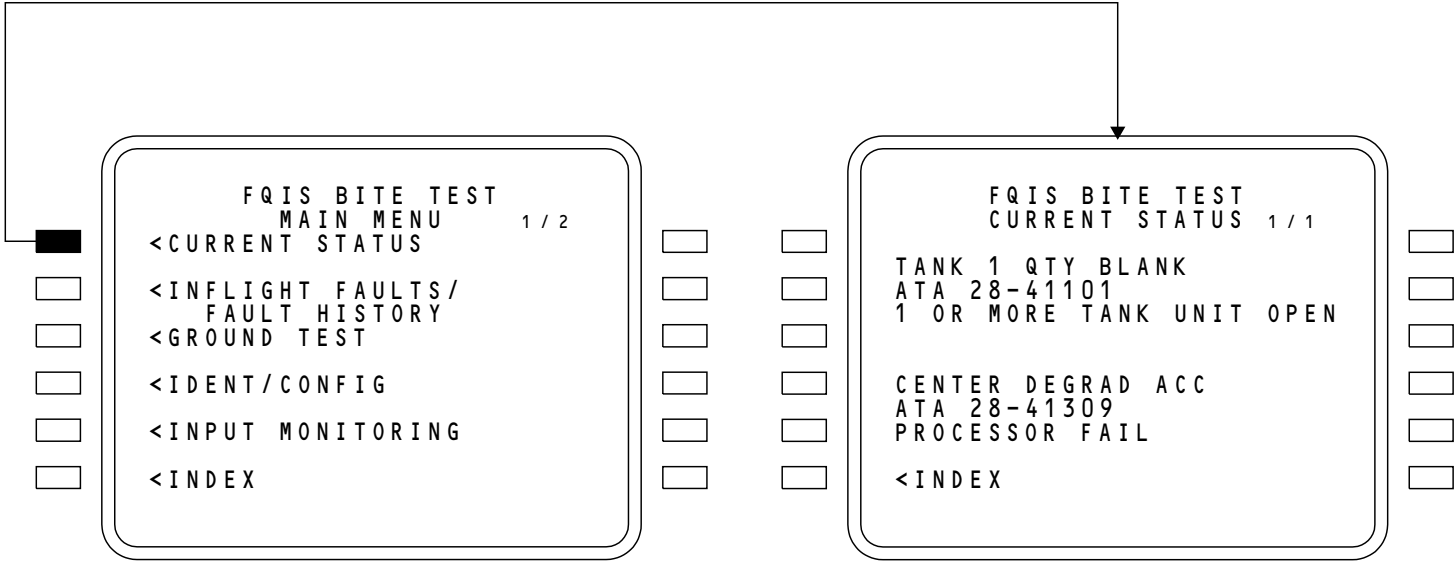

M84680 S0004626195_V1

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST CURRENT STATUS PAGE

28-41-00-009

SIA ALL

EFFECTIVITY

28-41-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

**FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST INFLIGHT FAULT PAGES****General**

The inflight fault pages let you see fault data from the fuel quantity processor's memory. You can access inflight fault pages sorted by flight or sorted by leg.

Inflight Fault Page - Sorted By Fault

The inflight faults (sorted by fault) page shows faults, in order, from the most recent fault to the oldest fault. A number shows which inflight faults page you are on as well as the total number of inflight faults pages you can access. This fault data shows:

- Maintenance message
- Fault number
- Brief description of the fault
- Number of times the fault occurred.

Inflight Faults Menu Page - Sorted By Leg

The inflight faults (sorted by leg) menu page allows you to select specific flight legs in which a fault occurred. Only those flight legs, that had a fault, out of the past 25 flight legs, show.

The current flight leg ends and a new flight leg starts when the airplane's airspeed falls below 100 knots.

Inflight is that time from which the airplane's airspeed is more than 100 knots to the next time the airplane's airspeed decreases below 100 knots.

Inflight Faults Page - Sorted By Leg

The inflight faults (sorted by leg) page shows fault data for a specific flight leg. A number shows which inflight faults page you are on as well as the total number of inflight faults pages you can access. This fault data shows:

- Date the flight leg occurred
- Time the flight leg began
- Maintenance message
- Fault number

- Brief description of the fault
- Number of times the fault occurred during this flight leg
- Time of the first occurrence of the fault.


28-41-00

EFFECTIVITY	
SIA ALL	

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST INFLIGHT FAULT PAGES

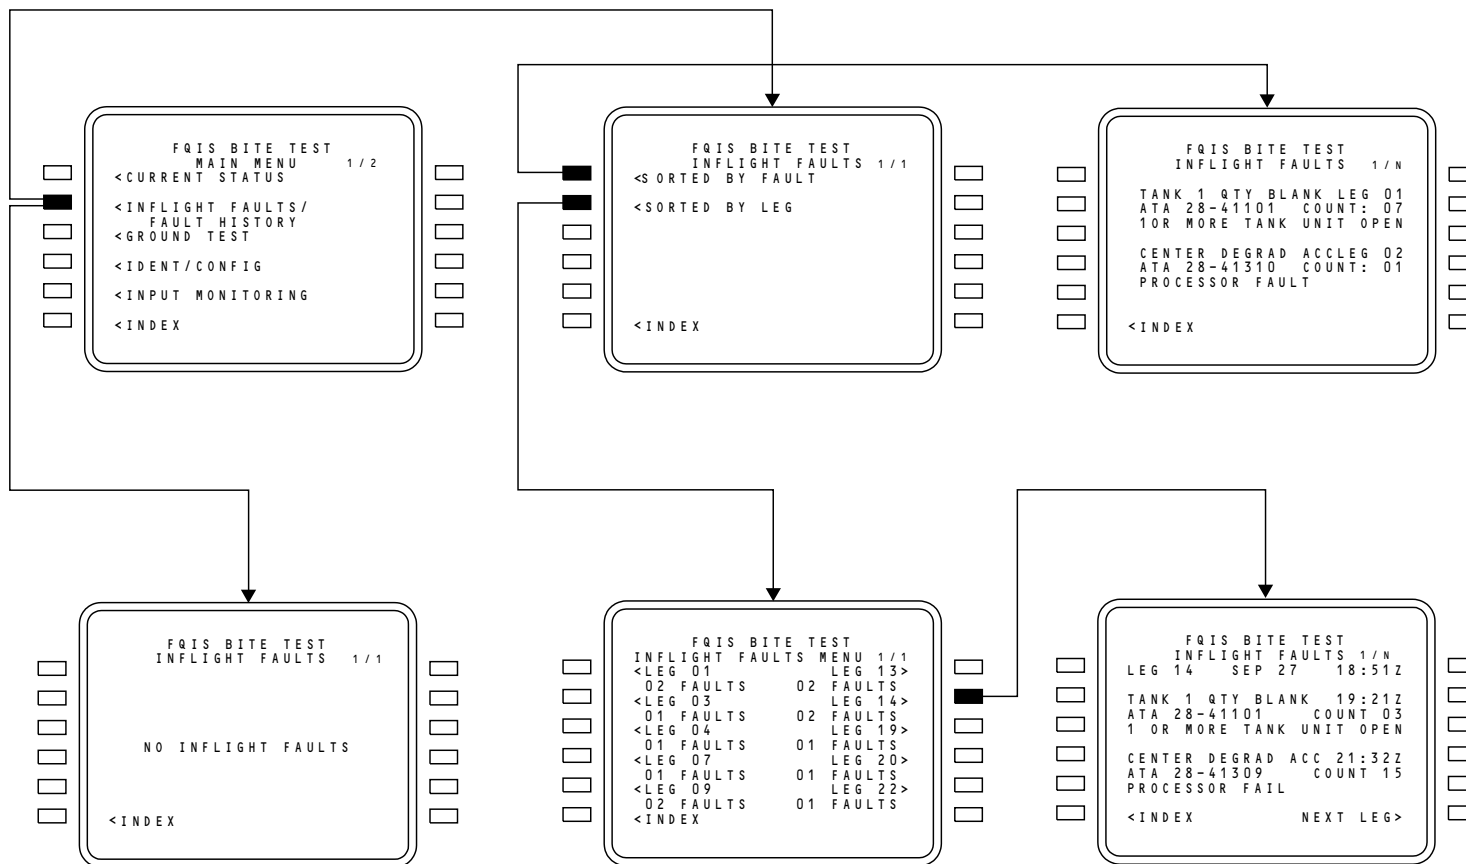

M84681 S0004626197_V1

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST INFLIGHT FAULT PAGES

28-41-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST GROUND TEST PAGES

Ground Test Pages

The ground test pages allow you to do a test of the FQIS processor.

SIA 702-710


This test is similar to the power on self test.

SIA ALL

Do not run the ground test while fueling the airplane. You might put the incorrect quantity of fuel on the airplane, as fuel quantity indication is part of the ground test.

EFFECTIVITY	
SIA ALL	

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST GROUND TEST PAGES

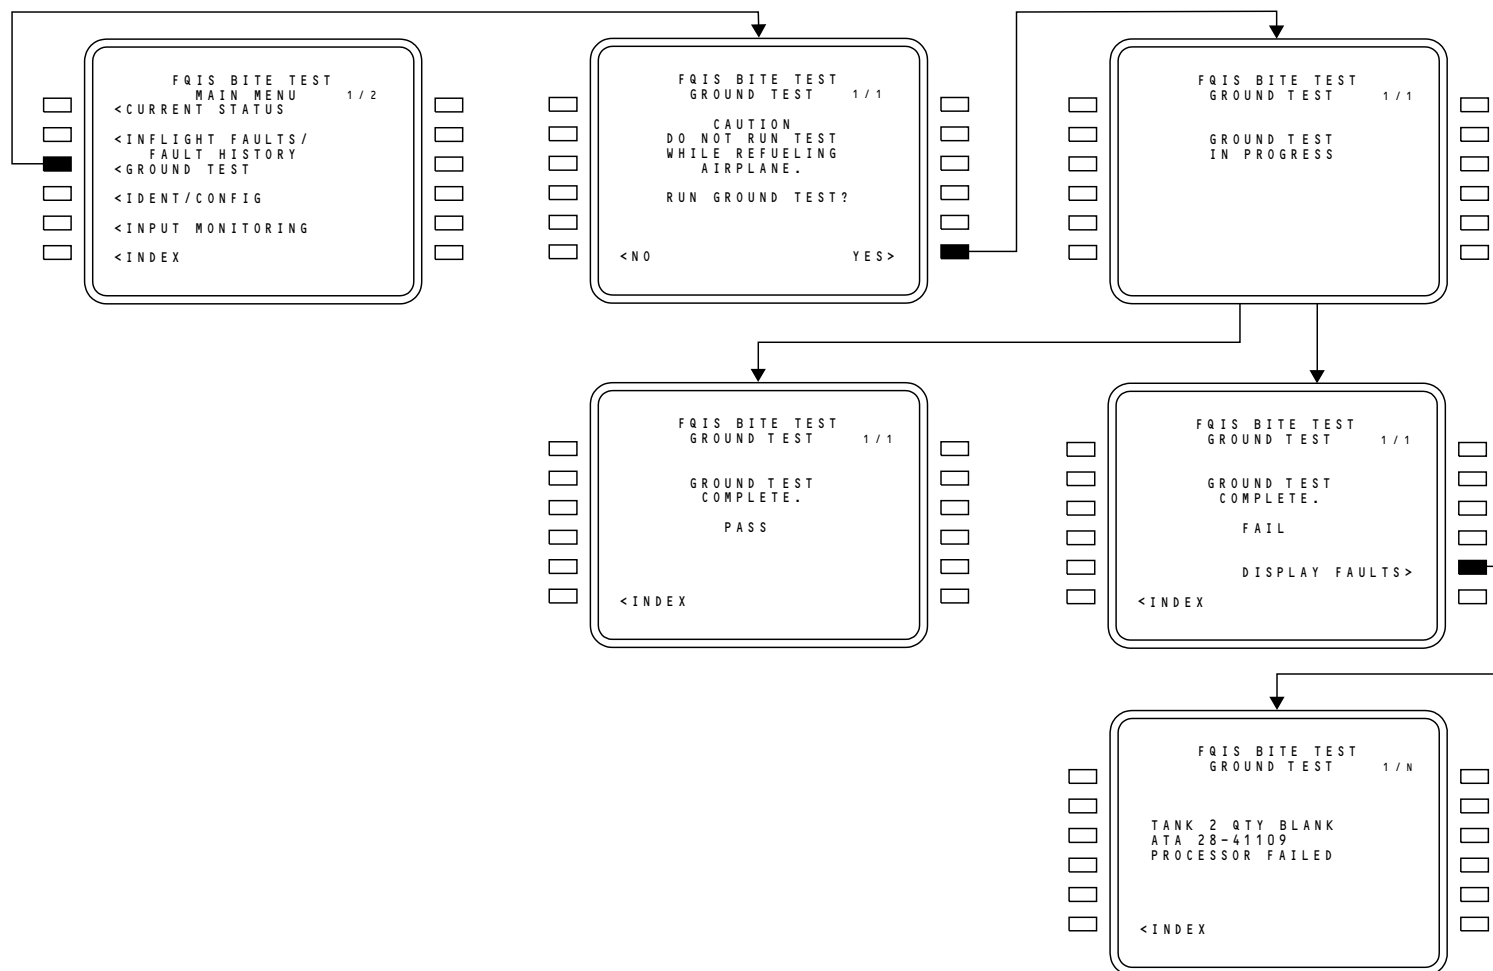

M84682 S0004626199_V1

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST GROUND TEST PAGES

28-41-00

SIA ALL EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST IDENT/CONFIG PAGES

Ident/Config Pages

The ident/config pages show data from the FQIS processor configuration.

The ident/config pages show this data for each fuel tank:

- Individual fuel tank software version and revision number
- Fuel quantity display (pounds or kilograms)
- Densitometer installation
- BITE software version and revision number.

SIA 711-714, 716-999

- 737 Type (737NG or OTHER).


SIA ALL**28-41-00**

SIA ALL	EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST IDENT/CONFIG PAGES

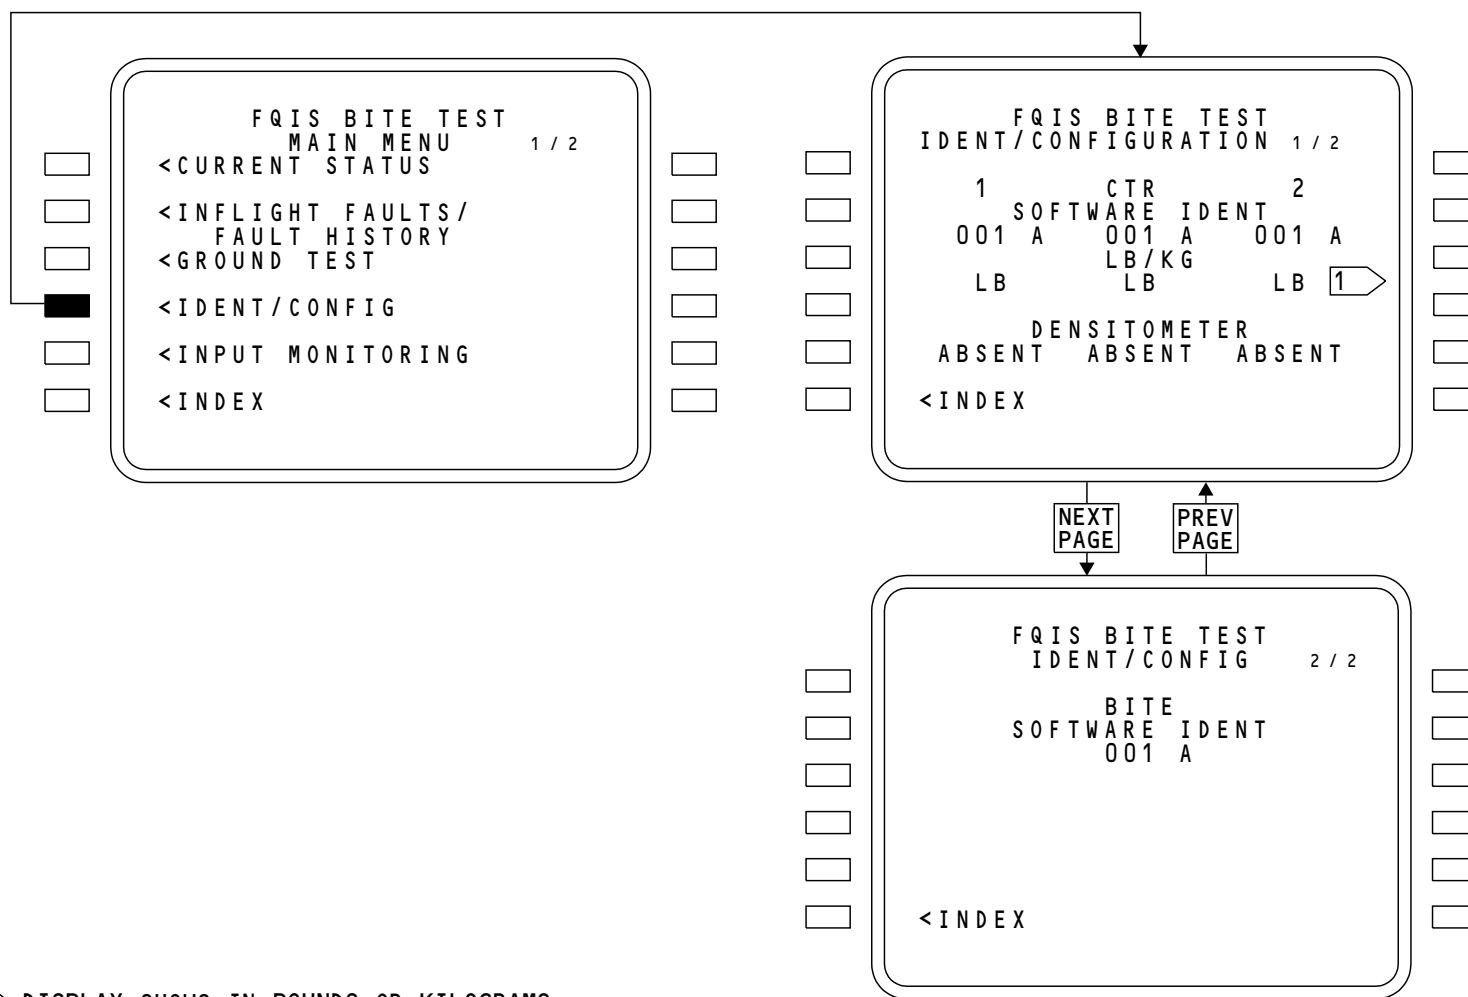


1 DISPLAY SHOWS IN POUNDS OR KILOGRAMS

M84683 S0004626201_V2

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST IDENT/CONFIG PAGES

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST IDENT/CONFIG PAGES

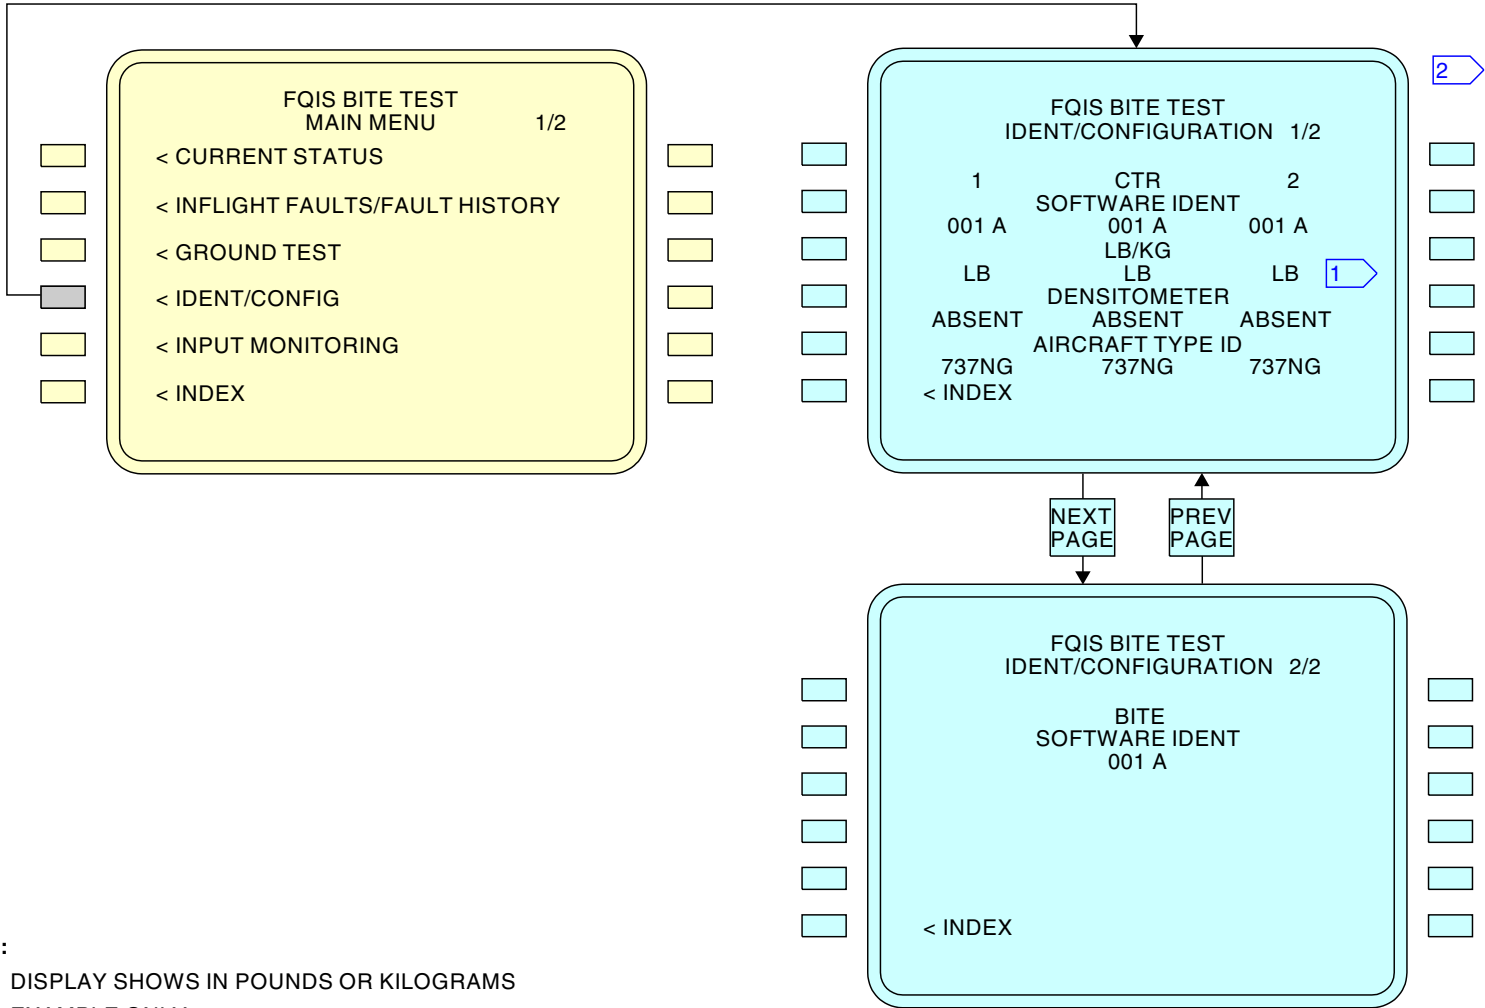

NOTE:
 1 DISPLAY SHOWS IN POUNDS OR KILOGRAMS
 2 EXAMPLE ONLY

2395851 S0000553145_V1

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST IDENT/CONFIG PAGES



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-41-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST INPUT MONITORING PAGES


Input Monitoring Pages

The input monitoring pages show fuel quantity data for each fuel tank. The input monitoring pages show this data:

- Fuel mass
- Fuel volume
- Fuel density
- Compensator capacitance
- Total tank unit capacitance.

SIA ALL	EFFECTIVITY
	D633A101-SIA

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST INPUT MONITORING PAGES

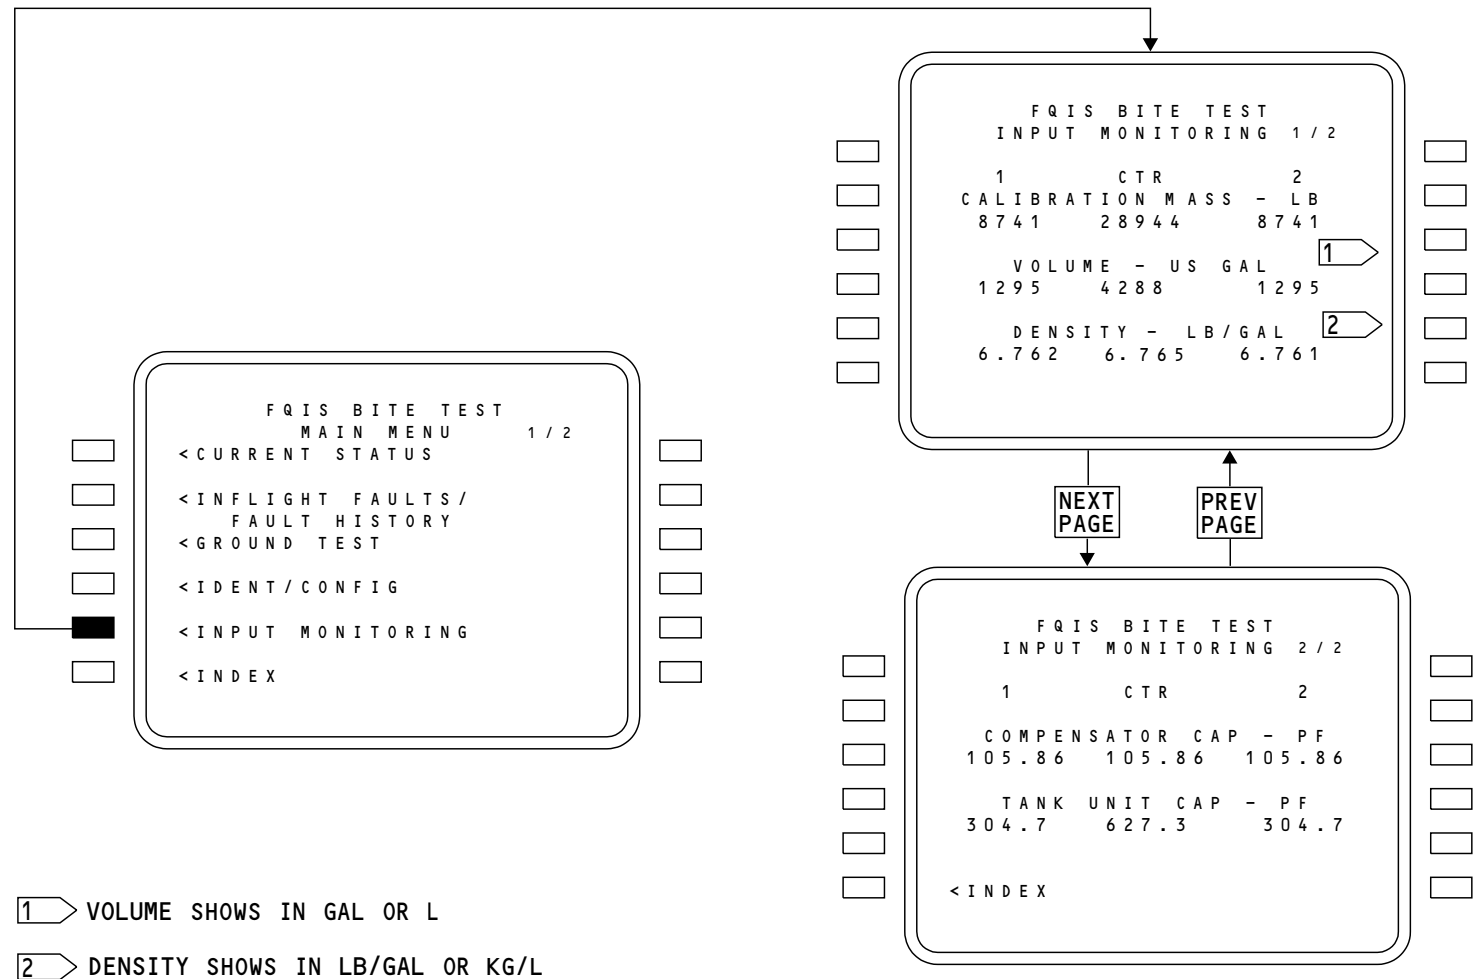

M84691 S0004626210_V1

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST INPUT MONITORING PAGES




FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST ERASE FAULT HISTORY PAGES

Erase Fault History Pages

The erase fault history page allows you to erase recorded fault history data from the inflight faults pages.

SIA ALL	EFFECTIVITY
	D633A101-SIA

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST ERASE FAULT HISTORY PAGES

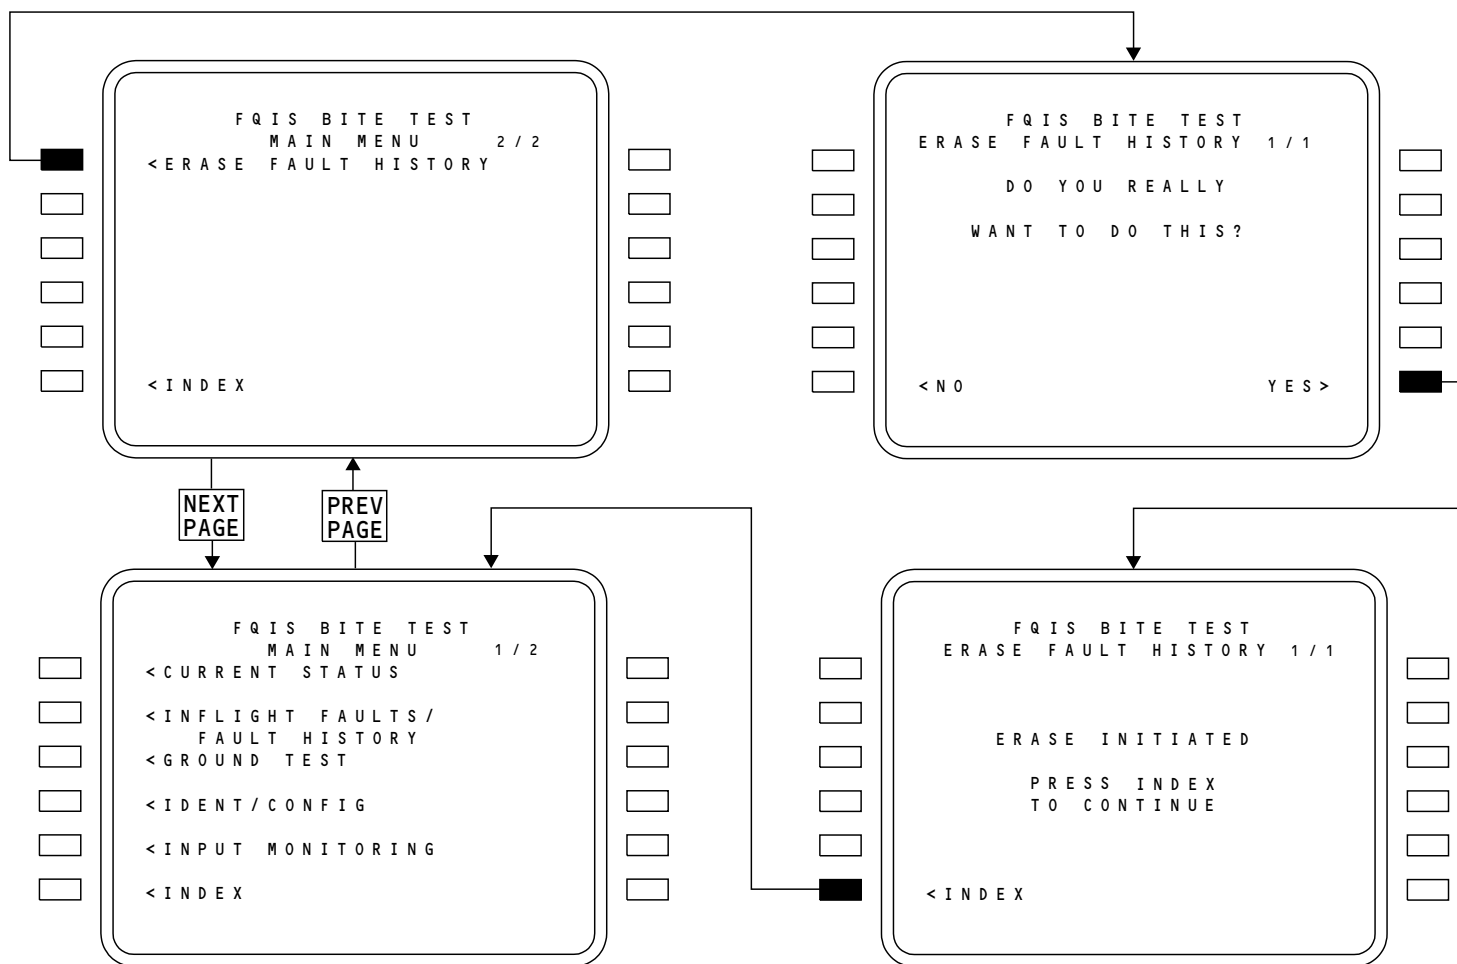

M84692 S0004626212_V1

FUEL INDICATING - TRAINING INFORMATION POINTS - FQIS BITE TEST ERASE FAULT HISTORY PAGES

28-41-00

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



THIS PAGE IS INTENTIONALLY LEFT BLANK

28-43-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL TEMPERATURE INDICATING SYSTEM

Purpose

The fuel temperature indicating system shows fuel temperature in main tank No. 1.

Location

The fuel temperature bulb is on the rear spar on main tank No. 1.

The fuel temperature indicator is on the fuel system panel (P5-2).

Components

The fuel temperature indicator is a resistance ratiometer instrument.

The fuel temperature bulb is a resistance unit. The resistance of the fuel temperature bulb changes with fuel temperature.

You do not have to defuel main tank No. 1 to remove the fuel temperature bulb.

Operation

The fuel temperature indicator receives 28v ac power. The fuel temperature indicator sends a dc signal through the fuel temperature bulb. The fuel temperature bulb resistance changes this signal, before it goes back to the fuel temperature indicator.

Training Information Point

With no electrical power, the pointer goes off scale at the negative side of the indicator.


28-43-00

SIA ALL	EFFECTIVITY
---------	-------------

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

FUEL TEMPERATURE INDICATING SYSTEM

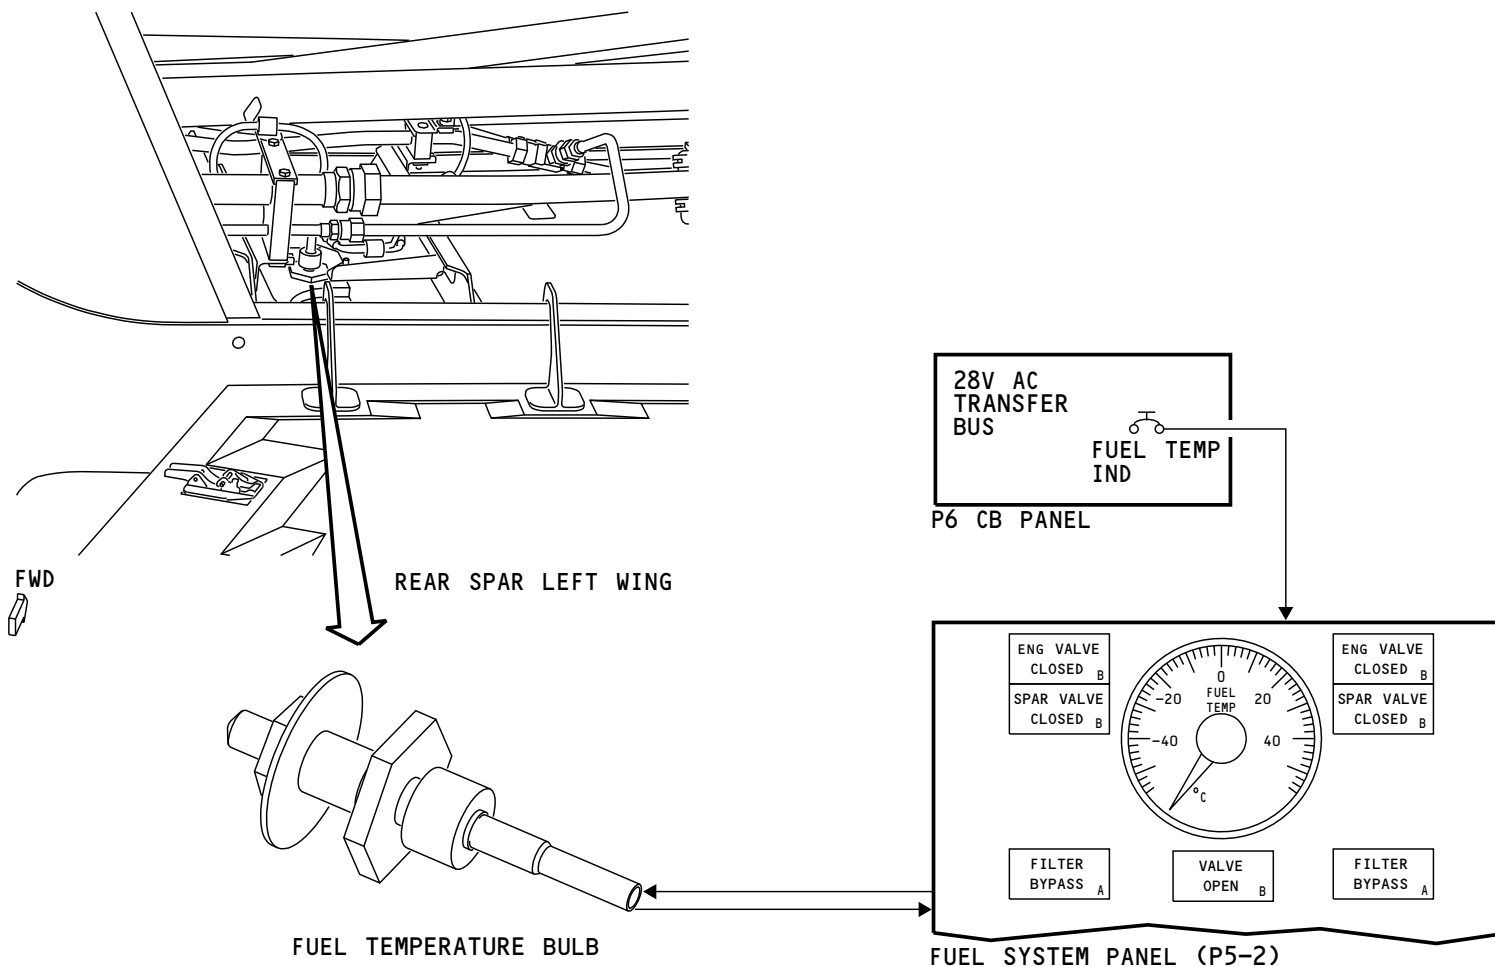

M84694 S0004626216_V1

FUEL TEMPERATURE INDICATING SYSTEM

28-43-00

28-43-00-000

SIA ALL

EFFECTIVITY

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL TEMPERATURE INDICATING SYSTEM

THIS PAGE IS INTENTIONALLY LEFT BLANK

28-44-00

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details



FUEL MEASURING STICK - INTRODUCTION

General

You manually measure fuel quantity with the fuel measuring sticks.

There are six measuring sticks in main tank 1 and main tank 2. Each fuel measuring stick is on a fuel tank access door. The fuel measuring sticks are numbered 3 through 8, from inboard to outboard.

There are four fuel tank measuring sticks in the center tank. Two fuel tank measuring sticks are on fuel tank access panels and two are on the wing skin. The center tank fuel measuring sticks are numbered 1 and 2, from inboard to outboard.

The inner sticks have graduation marks that show fuel height in linear units.

There are two inclinometers, one for airplane pitch, one for airplane roll, in the main landing gear wheel well.

There is also plumb bob attachment and a leveling scale in the right main wheel well. You use the plumb bob and leveling scale to determine airplane pitch and roll.

You use fuel height the linear unit measurement and airplane pitch and roll to measure fuel quantity. Chapter 12 of the AMM Part II, has conversion tables that change linear units, fuel height, and airplane pitch and roll into fuel quantity.

28-44-00-000


EFFECTIVITY	
SIA ALL	

D633A101-SIA

ECCN 9E991 BOEING PROPRIETARY - See title page for details

28-44-00

FUEL MEASURING STICK - INTRODUCTION

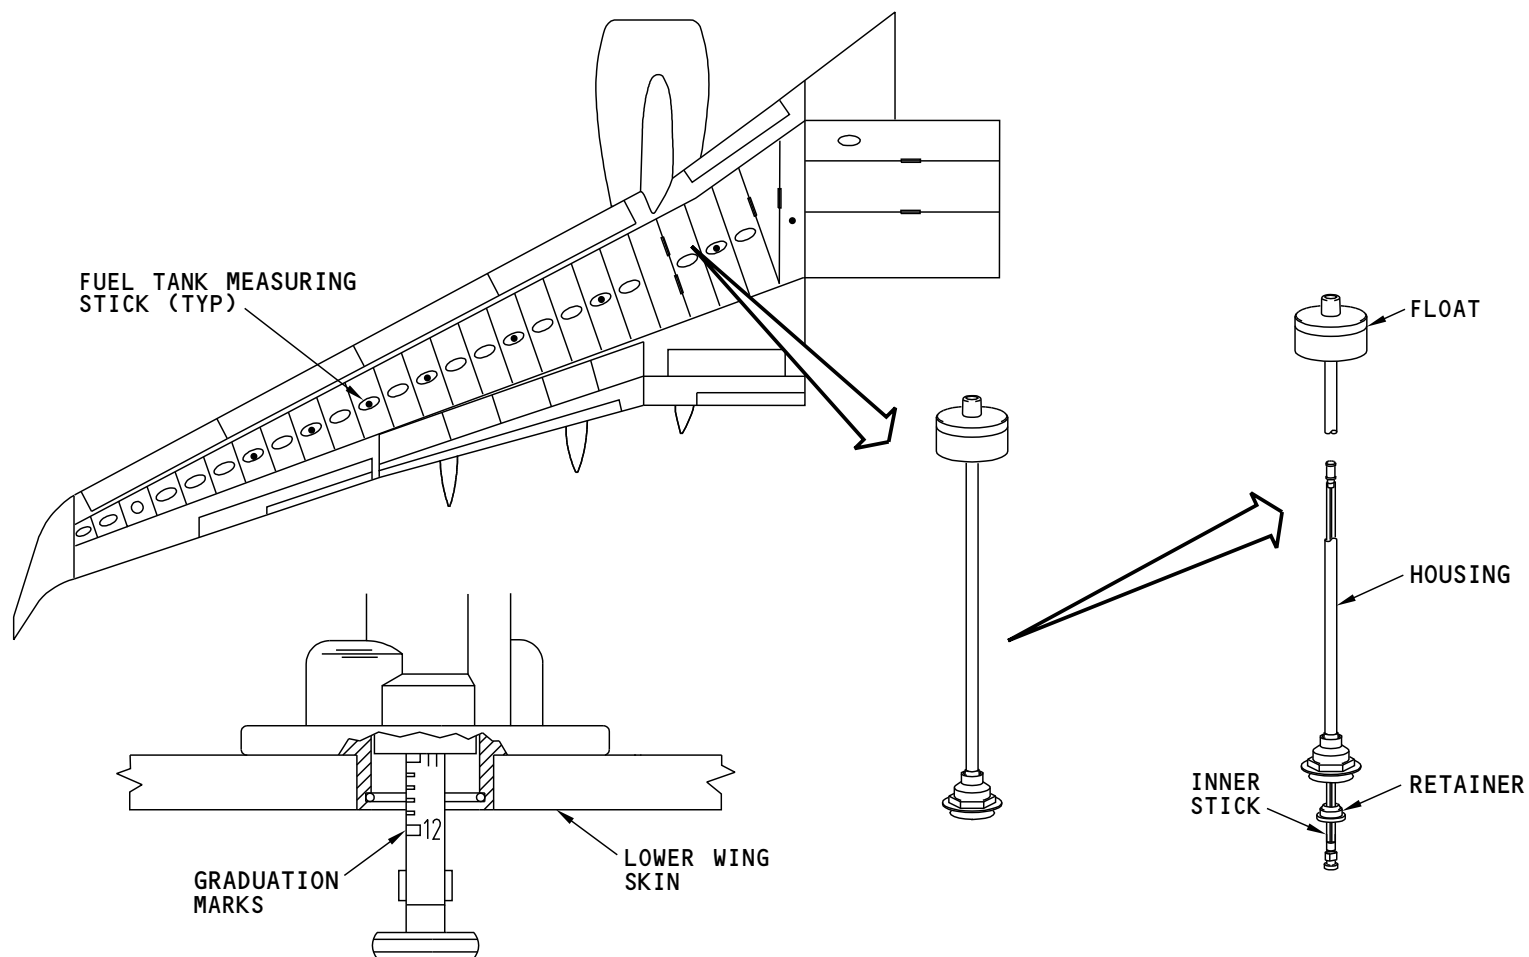

M84696 S0004626221_V1

FUEL MEASURING STICK - INTRODUCTION

28-44-00

